



HP G71t-300 Keyboard Replacement

The keyboard is the panel of keys that allow the user to operate the device. This guide helps the user replace a broken or unresponsive keyboard.

Written By: Rohan Mathew



INTRODUCTION

Have the replacement keyboard ready to install before disassembly.

TOOLS:

- Phillips #0 Screwdriver (1)
- Metal Spudger (1)

PARTS:


- keyboard panel (1)

Step 1 — Keyboard





- Ground yourself by either touching an unpainted metal surface or by using the Anti-Static wrist strap.
- Turn off the computer and remove the charger from the charging port.
- Turn the laptop over and slide the battery release catch to the right. The battery will pop up from its slot. Remove it using your fingers.

Step 2

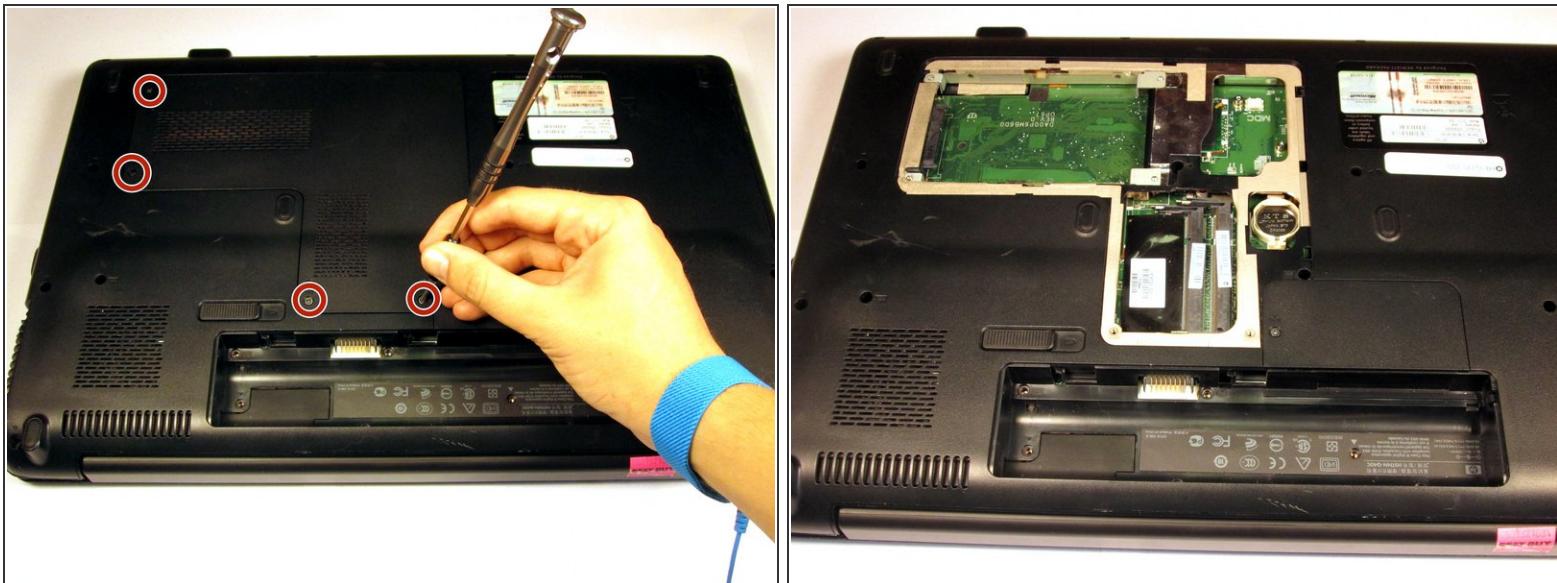


- Use a Phillips #0 screwdriver to remove the four screws from the indicated cover.
- Gently lift and remove the cover.

Step 3

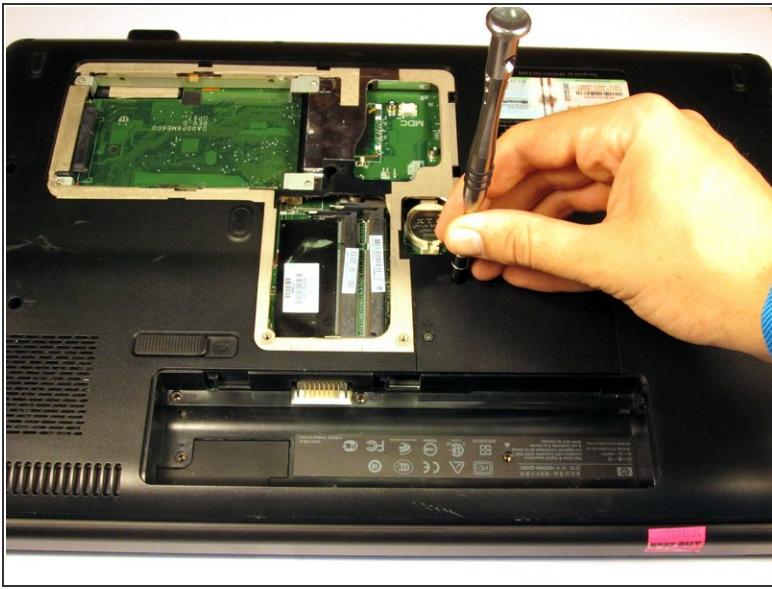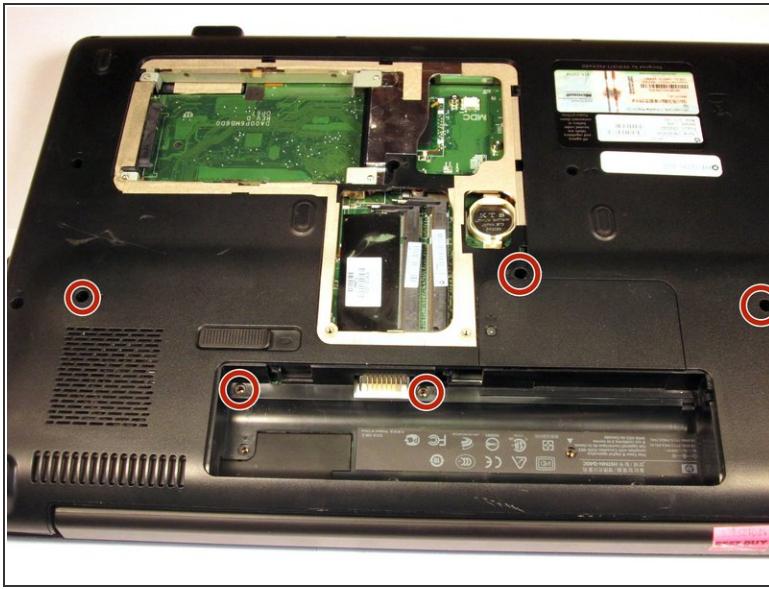



- Remove the five 6mm screws with the Phillips #0 screwdriver.

Step 4

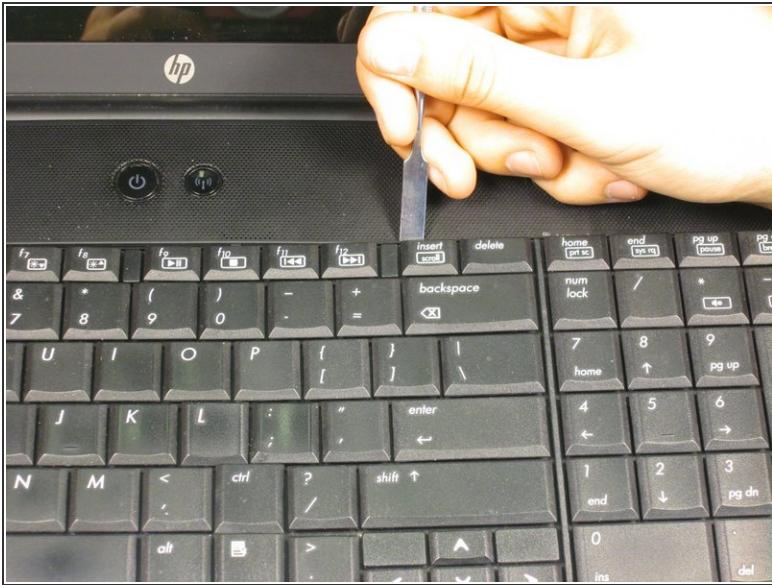

- Pry the keyboard off with a spudger. Be careful not to apply too much pressure and damage any components.

Step 5

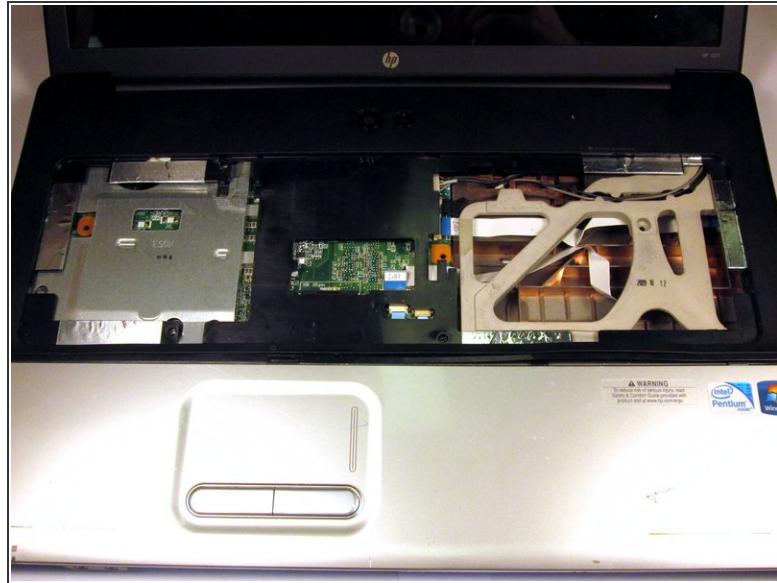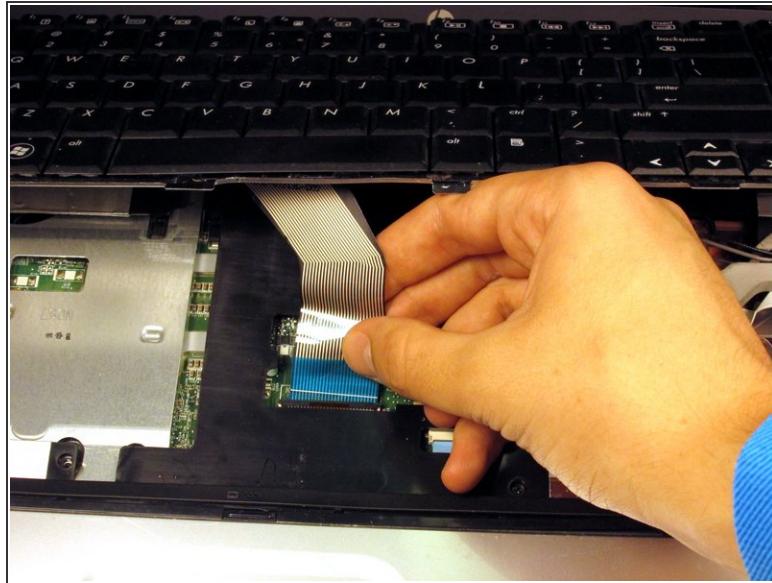

- Disconnect the clip attaching the keyboard wiring to the motherboard. Lift and remove the keyboard.

To reassemble your device, follow these instructions in reverse order.