




# HP Mobile Thin Client mt41 Back Cover Removal

This guide will show you how to safely take apart the back of the laptop.

Written By: Raul Rodriguez

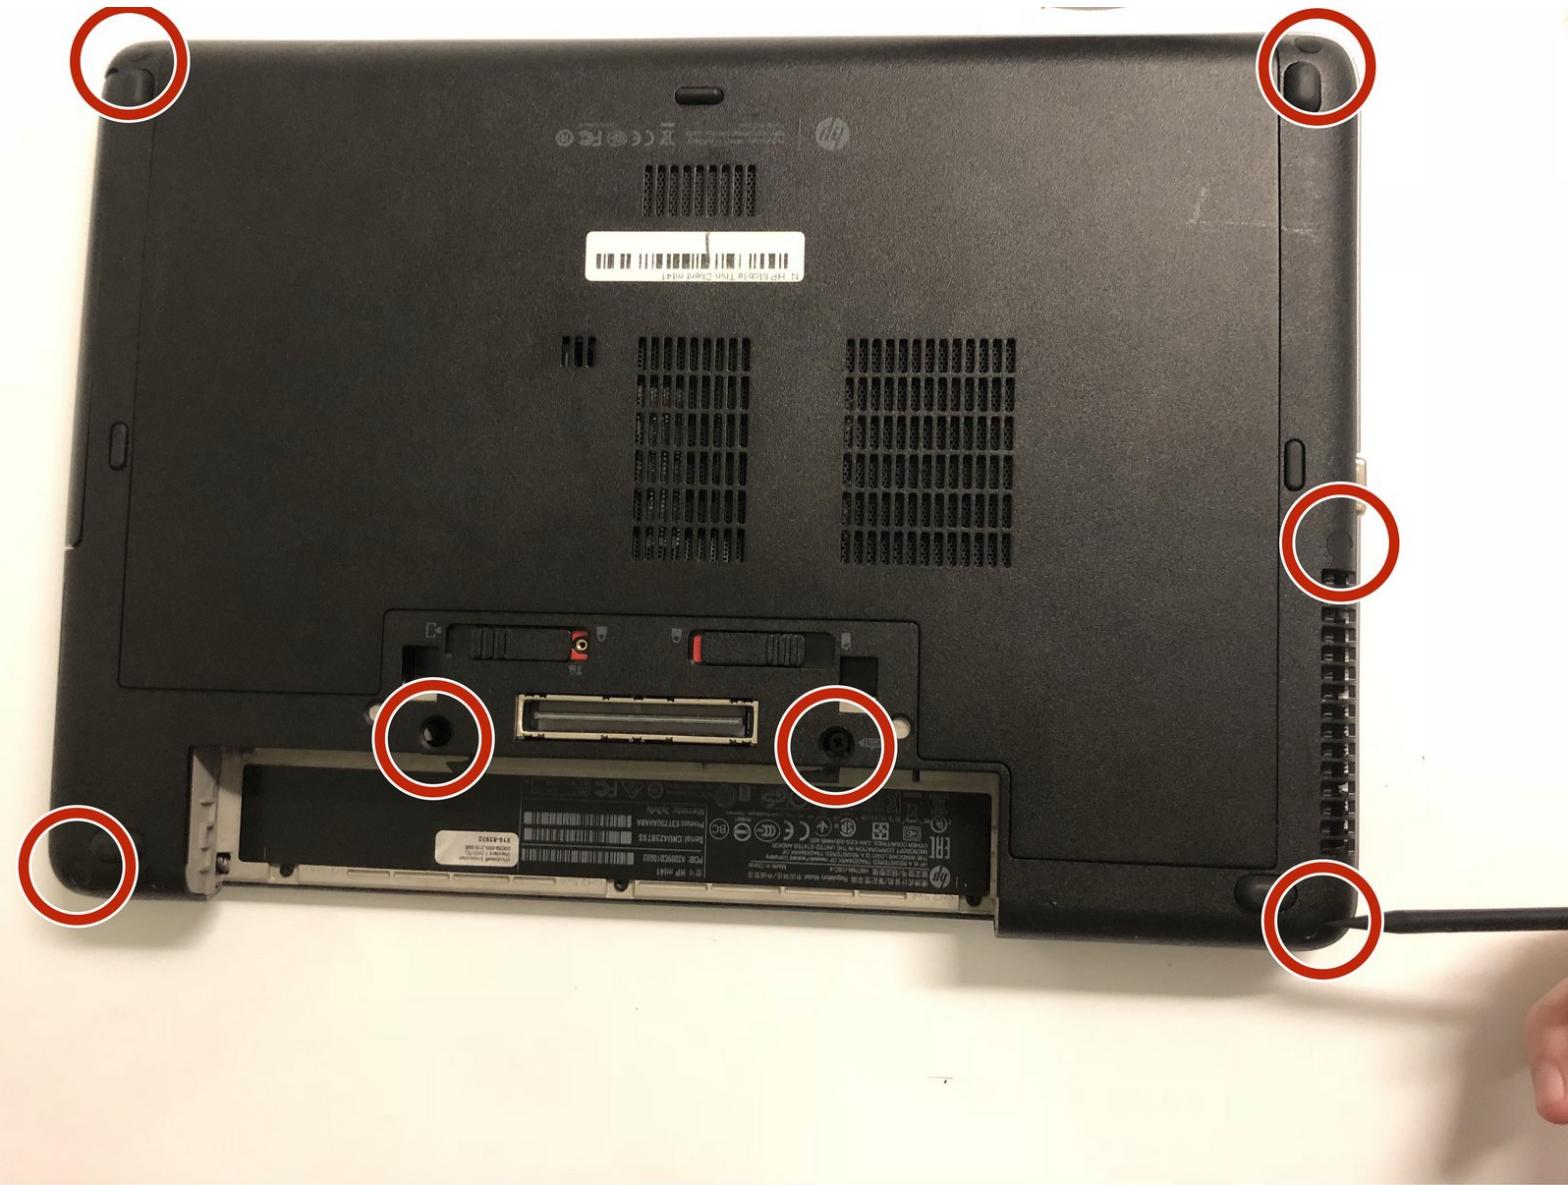

 **TOOLS:**

- [iFixit Opening Tools \(1\)](#)
- [T5 Torx Screwdriver \(1\)](#)
- [Spudger \(1\)](#)


## Step 1 — Back Cover



- Locate the screws highlighted to remove.

*(i)* We recommend removing the battery first. Refer to the "Battery Replacement" guide to learn how to remove the battery.

## Step 2

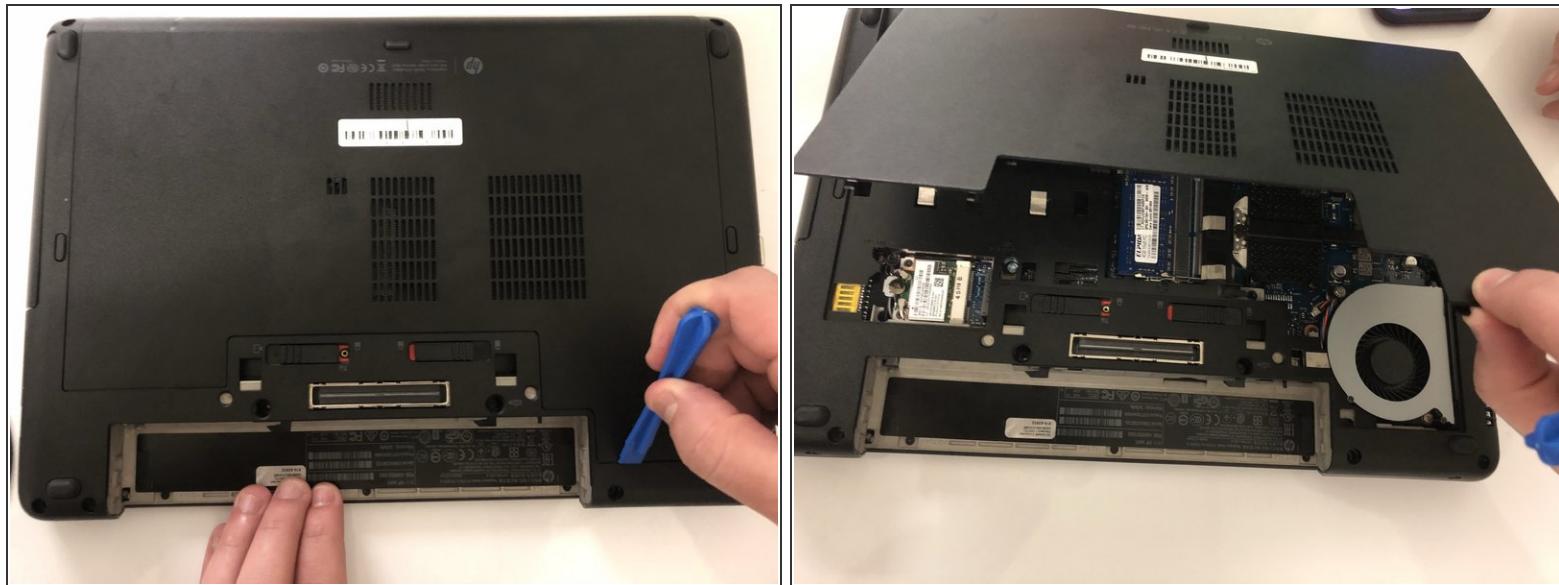

- Remove the middle back lid shown in the image.

*(i)* May require a bit of force. If it is not coming out try the other side.

## Step 3



- Go around the edges with a special tool to pop lid out of place.

## Step 4



- Once all corners are popped out of place lift the cover up slowly.

**i** Lifting the lid should not require much force.

To reassemble your device, follow these instructions in reverse order.