



HP Pavilion 15-au123cl Display Replacement

This replacement guide will help show how to properly remove the display off an "HP Pavilion 15-au123cl".


Written By: Jonathan Wilson



 **TOOLS:**

- [Phillips #0 Screwdriver \(1\)](#)
- [iFixit Opening Tools \(1\)](#)
- [Jimmy \(1\)](#)

Step 1 — Display Screen

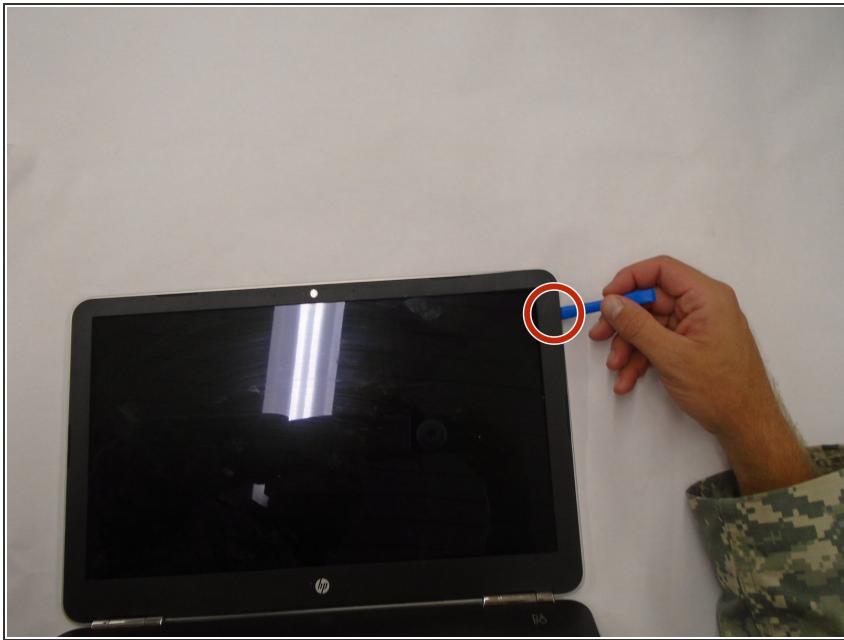

- Carefully wedge a plastic opening tool between the edges of the screen to.
- While the tool is underneath the edges, move the tool around the screen to remove the black bezel.

Step 2



- Remove the four screws (one in each corner) with Phillips #0 screwdriver.

Step 3



- Detach the ribbon cable from the back side of the screen.
- When you have detached the ribbon cable from the back side, remove the display from the computer.

To reassemble your device, follow these instructions in reverse order.