




HP Pavilion 15-d035dx Front Panel Replacement

We will be removing the front panel of the computer so that we are able to reach the inside components of the laptop.

Written By: John Atkins

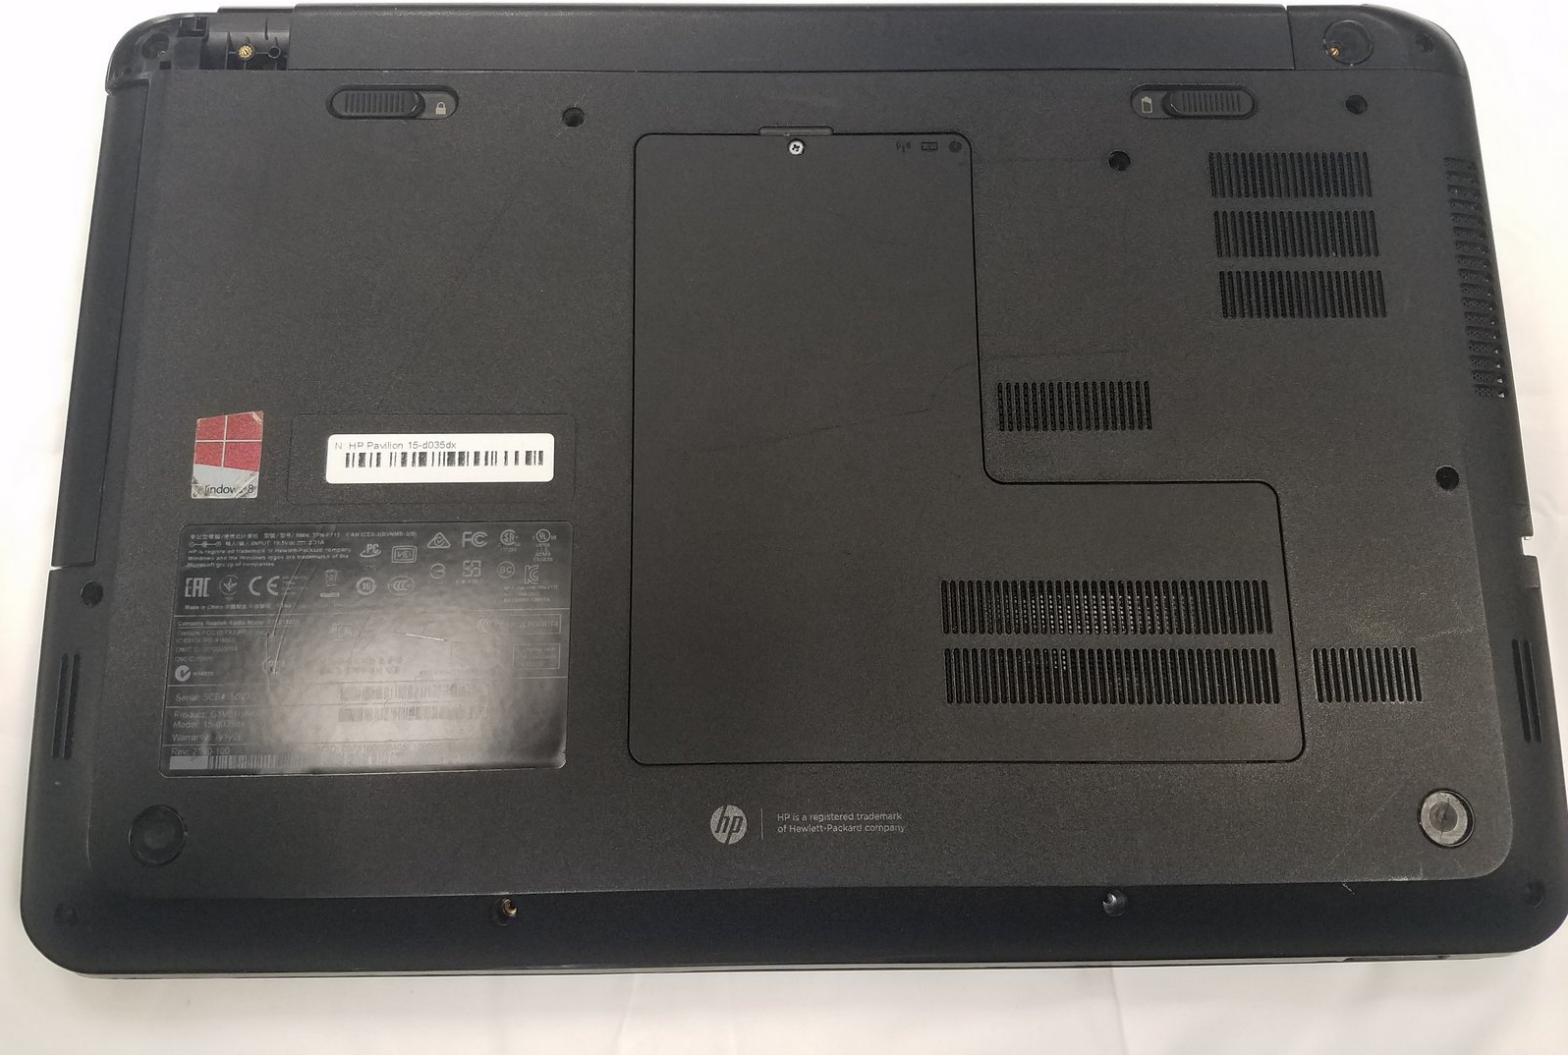

This document was generated on 2019-09-28 09:04:08 AM (MST).

 **TOOLS:**

- [Phillips #0 Screwdriver \(1\)](#)
- [iFixit Opening Tools \(1\)](#)

Step 1 — Battery




- Switch the first lock, with the padlock icon, to the open position.
- Then hold the second lock with the battery icon to the open position, while sliding out the battery pack.

Step 2 — Front Panel



- Begin by laying the laptop on its backside with the bottom of the laptop facing you.

Step 3

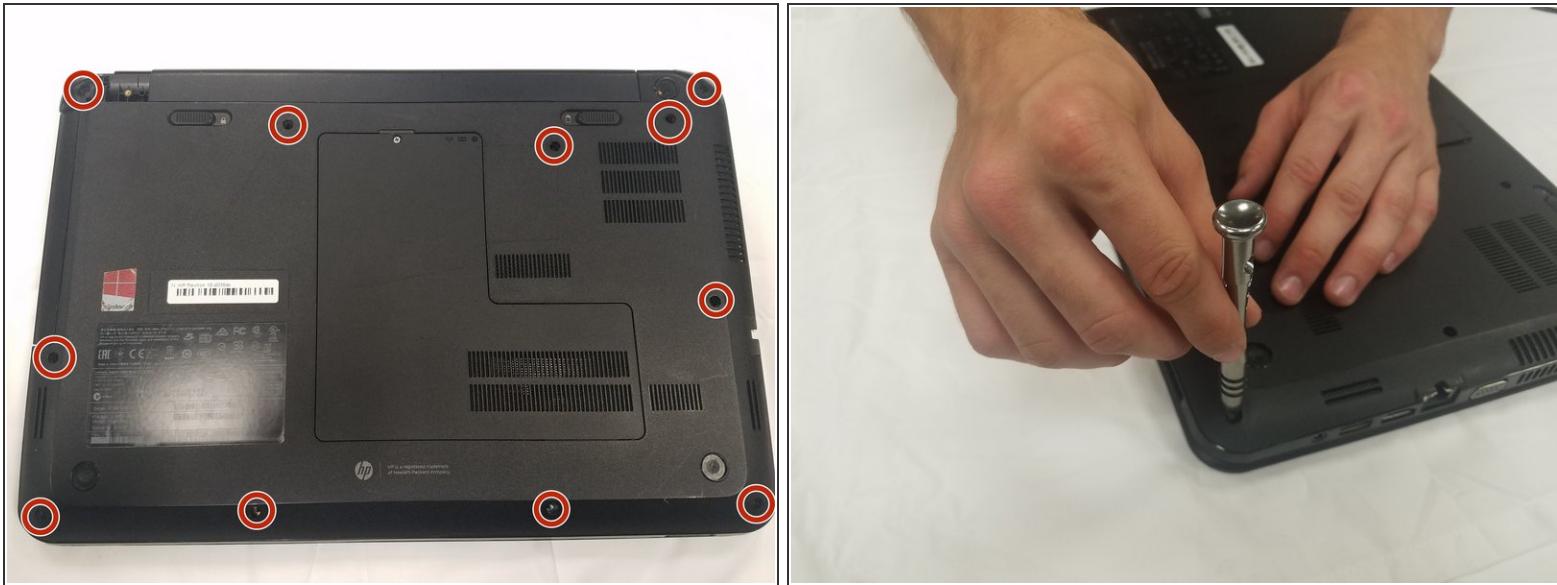

- There will be 11, 2.5x3.0mm Philips head screws that you will need to locate.
- Continue by unscrewing all of them using a 0 Phillips screwdriver.


Step 4



- Take off the back panel by removing the 4.0x4.7mm Philips head screw.
- Then using the opening tool, work around the edges to pull off the back panel.


● *i* It will take some force to get the back panel off.

Step 5

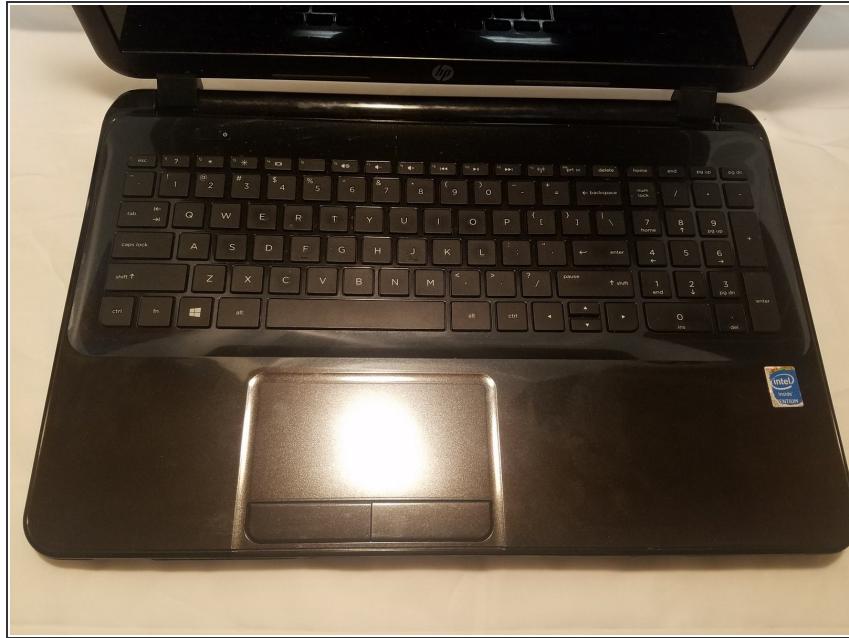

- Now flip the computer right side up and open up the laptop.
- You should be facing the screen and keyboard.

Step 6

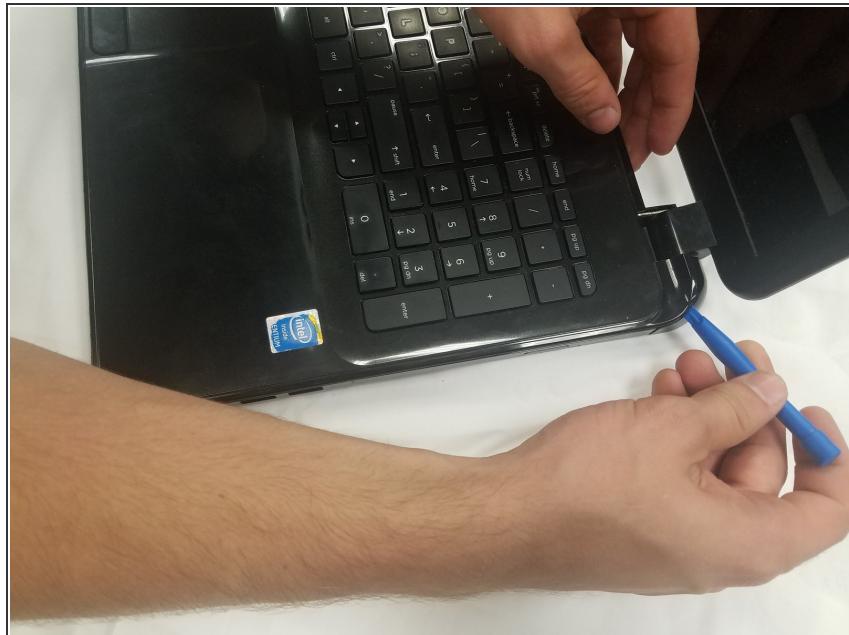

- Now using the opening tool remove the front panel from the back panel.
- It should start to pop off, you will have to do this step around the entire computer.

⚠ It will give some resistance so take your time to ensure that nothing breaks.

Step 7



- Once you have popped off the panel it should simply be able to lift off of the laptop.
- Keep in mind that the keyboard is still connected to the motherboard. Simply lay the keyboard on top of the screen while you are completing future guides.
- You can replace the front panel now.

To reassemble your device, follow these instructions in reverse order.