



HP Pavilion DM3-3010US Keyboard Replacement

How to replace the keyboard.

Written By: michael mannen



 **TOOLS:**

- [Spudger \(1\)](#)

Step 1 — Battery




- Flip laptop to bottom side and locate the battery eject switch.

Step 2





- Slide switch inward, then pull the battery away from its slot.
- Once free, place the battery to the side.

Step 3 — Keyboard

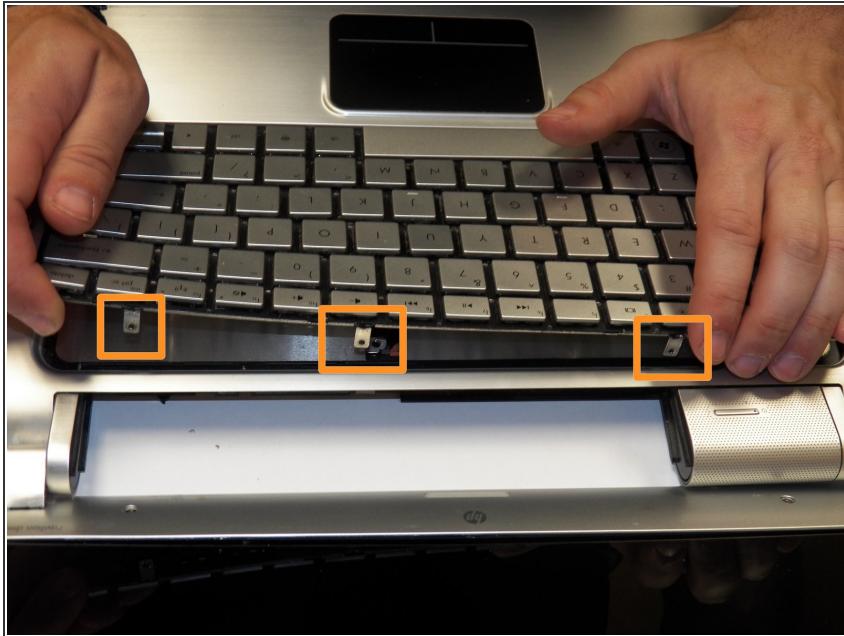

- Flip the laptop over and open it so the keyboard is visible.
- Using a spudger, gently pry the keyboard away from the laptop using the three indicated markers.
- Continue gently pulling the keyboard away from the laptop until it completely detaches.

Step 4

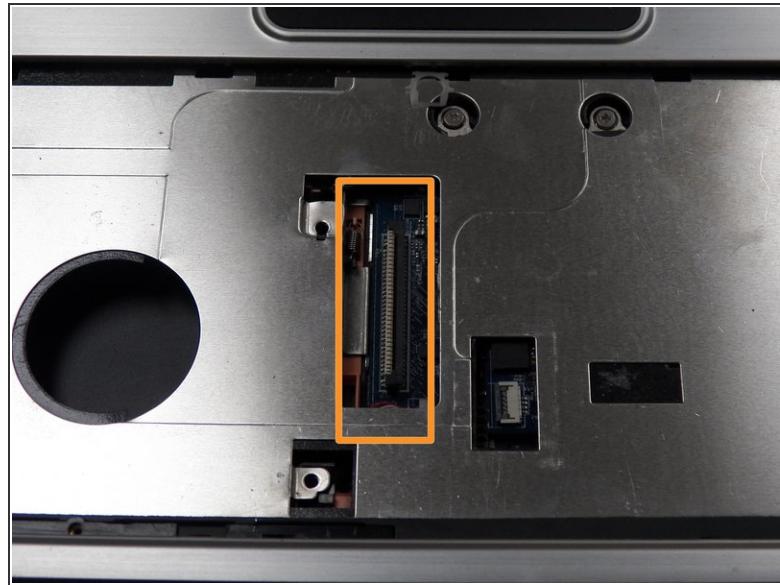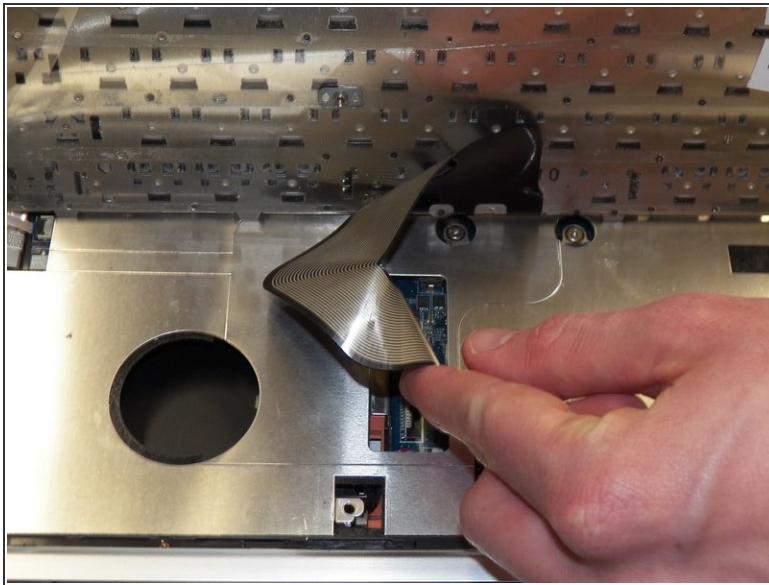

- Once the keyboard is completely detached, locate the ribbon housing inside the laptop.
- Gently pull the ribbon cable from the connector housing.

To reassemble your device, follow these instructions in reverse order.