



# HP Pavilion DV1000 Screen Replacement

This guide will give step-by-step instructions on how to replace the screen on an HP Pavilion dv1000.

Written By: Tyler Latour



 **TOOLS:**

- [Phillips #00 Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)
- [Spudger](#) (1)

## Step 1 — Battery



- Shut down the computer.
- Disconnect all external devices and cables from the computer.

## Step 2



- Flip the laptop over.

## Step 3



- Locate the gray sliding tab next to the black bar where the battery is located.
- Slide the gray sliding tab to the left until you hear a distinct click.
- The inside edge of the battery should pop up.

## Step 4



- Grasp the inside edge of the battery.
- Lift the inside edge of the battery up to detach the battery from the laptop.

## Step 5 — Keyboard



- Remove the highlighted screws.
- After removing the screws, flip the laptop over.

## Step 6



- Open the laptop.
- Use the spudger to lift the keyboard.

**⚠** Do not pull the keyboard up and away from the computer, because it is still attached by a ribbon cable.



- Press the two white clips forward with your fingers and gently pull the ribbon from the clips.

## Step 7 — Media Keys



- Turn the laptop upside-down again.
- Remove the highlighted screws.

## Step 8

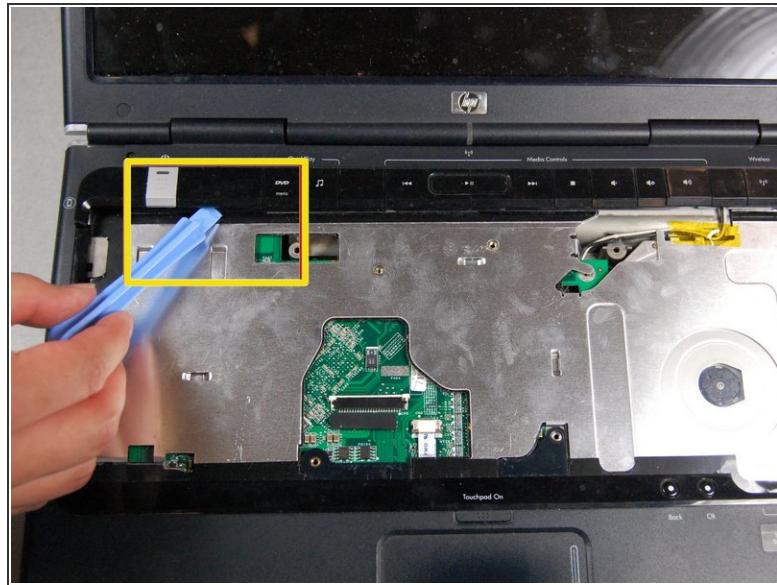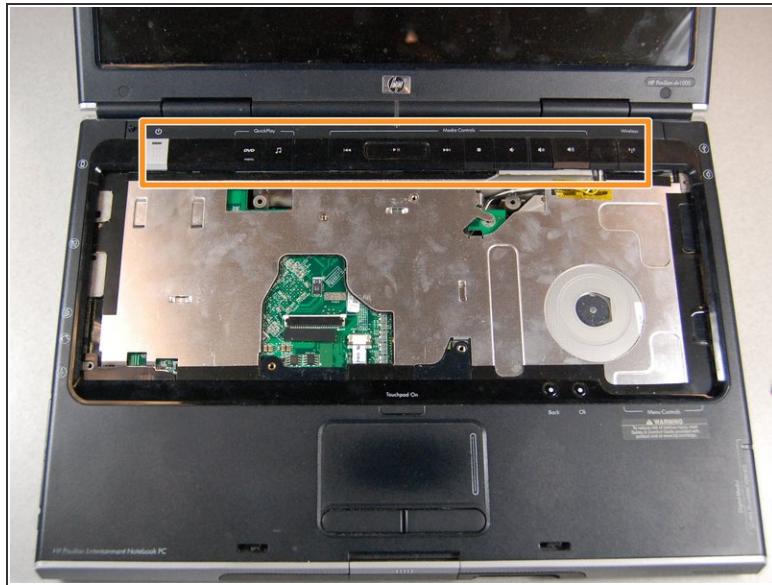

- Turn the laptop right-side up. Open the screen and tilt it all the way back.
- Locate the media keys.
- Gently lift up the media key strip using the plastic pry tool.

**⚠** If there is too much resistance when prying, stop and search for cause of the resistance. Do not force the media keys.

## Step 9 — Screen



- Remove the rubber inserts with the spudger.

*(i)* Note: When reassembling, notice that the two lower rubber pieces are flatter than the four rubber pieces located at the top of the screen.



- Remove the screws behind the rubber inserts.

## Step 10



- Carefully pry loose the screen casing with a plastic prying tool.

## Step 11

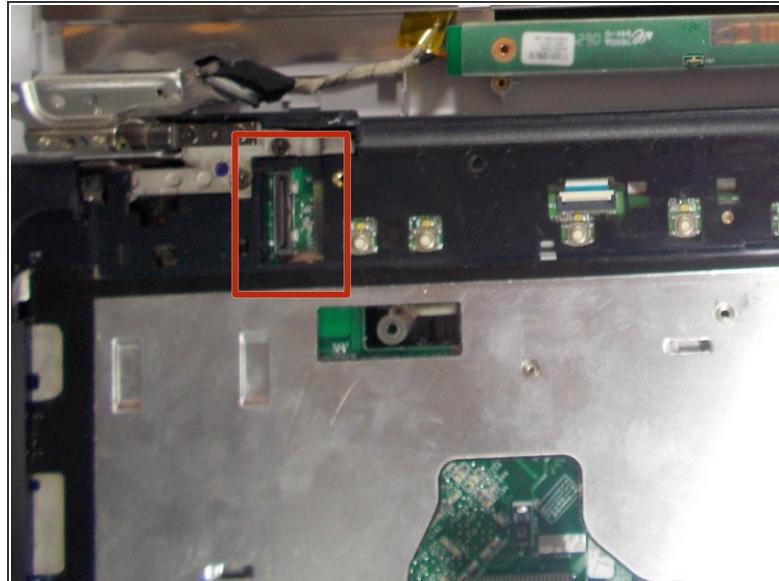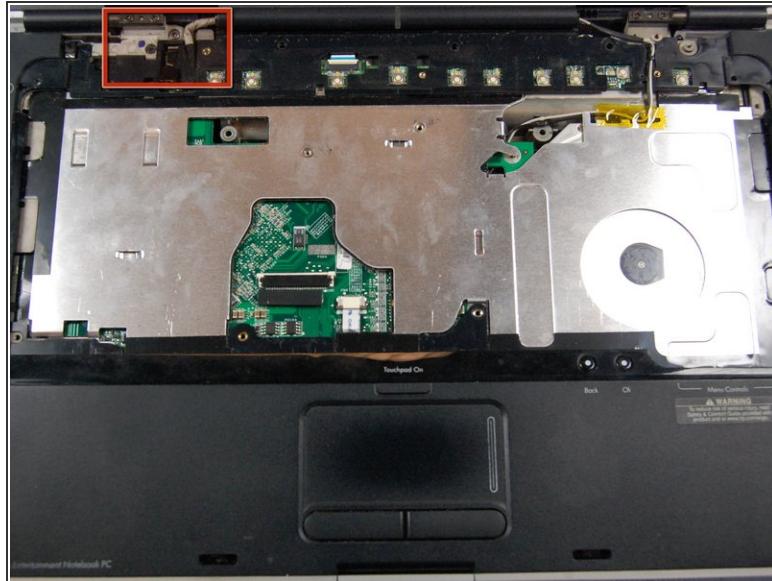

- Remove the plug by prying it loose with the spudger.

**⚠** Pulling the plug with your fingers could be potentially dangerous unless you are wearing work gloves.

## Step 12



- Remove the single screw marked in the image.
- ⚠** Be careful not to break the clips or pull any wires.

## Step 13



- Remove the 4 screws marked in the picture.

 Support the back cover and set it down on the desk. Do not pull off the back cover.

## Step 14



- Remove the screws on each side of the screen. There are four screws on each side.
- Remove the screen.

To reassemble your device, follow these instructions in reverse order.