




# HP Pavilion G60-235DX Keyboard Replacement

This guide will replace the keyboard of HP Pavilion G60-235DX

Written By: Gilbert Han

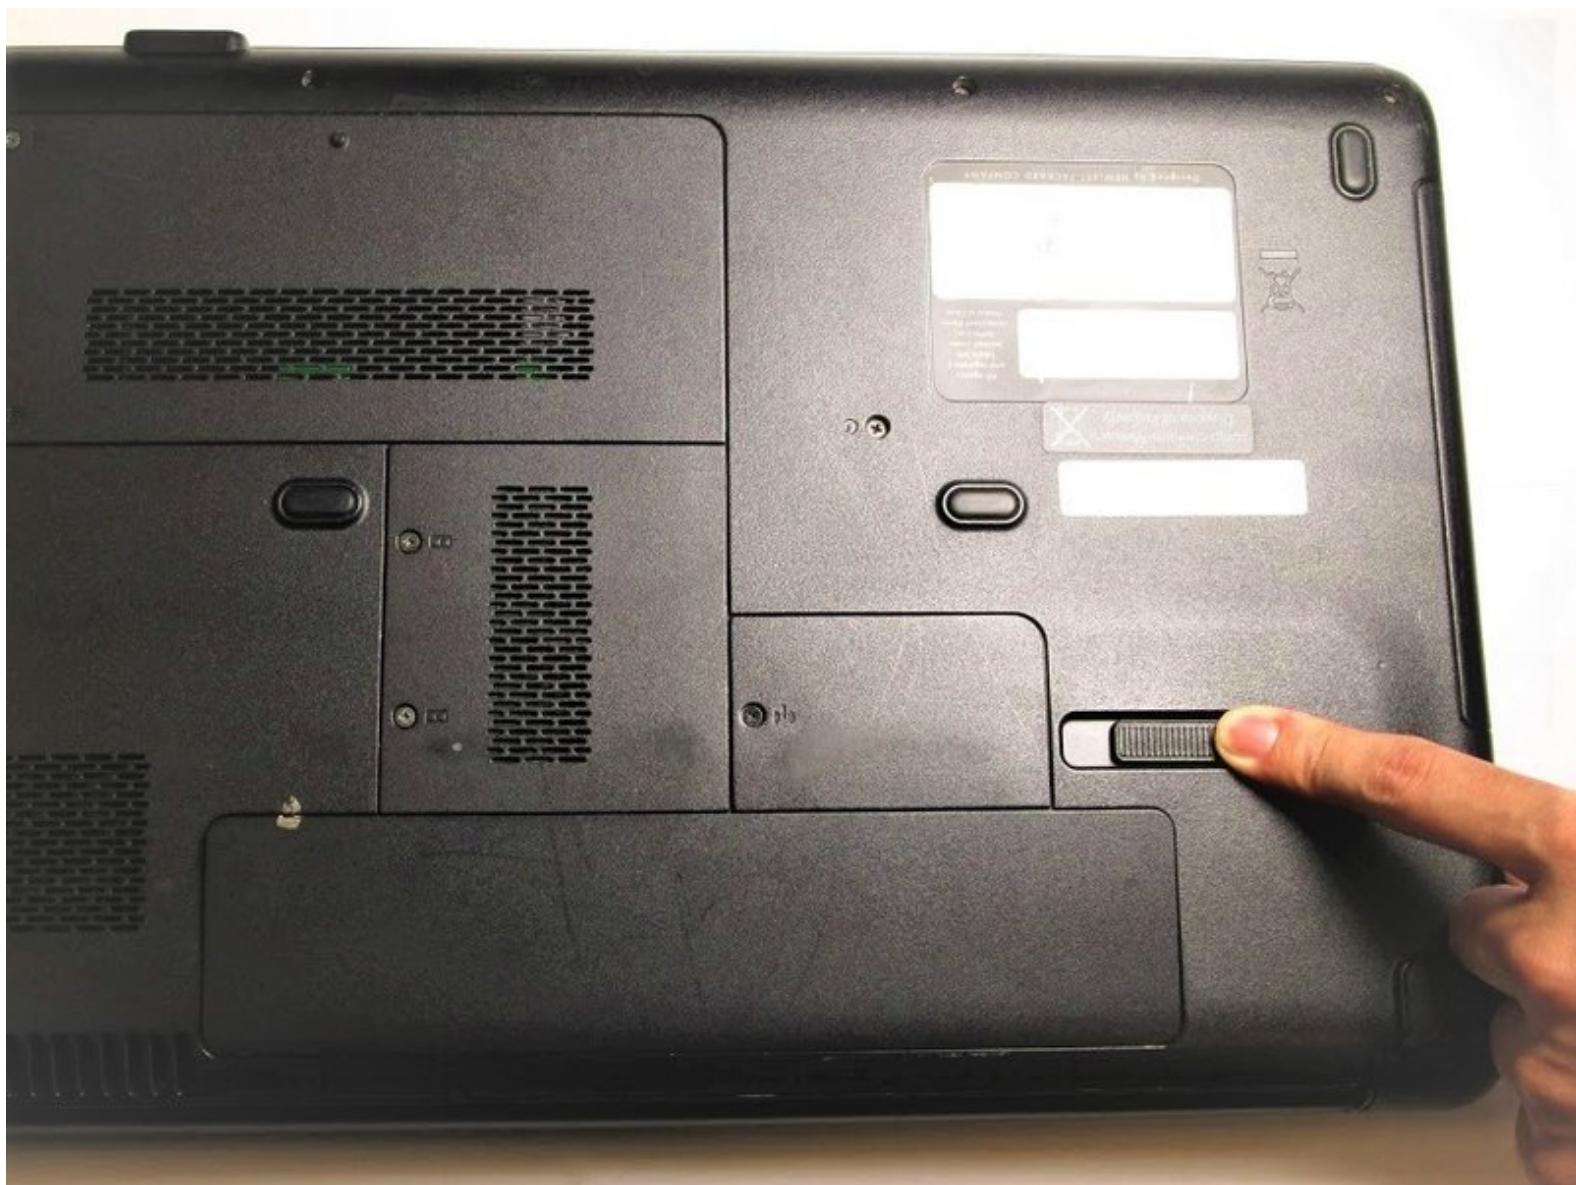

## INTRODUCTION

Are you having trouble with missing keys? Or is your keyboard sticky from spilling liquid? Replacing a keyboard may solve the problem

### TOOLS:

- Spudger (1)


## Step 1 — Keyboard



**⚠** Please turn the power of your device off. If not, it may cause a damage to the computer's hard drive and the person.

- Slide the lock to remove the battery
- After removing the battery, you can find 8 screws where battery were placed. Unscrew those 8 screws.


## Step 2

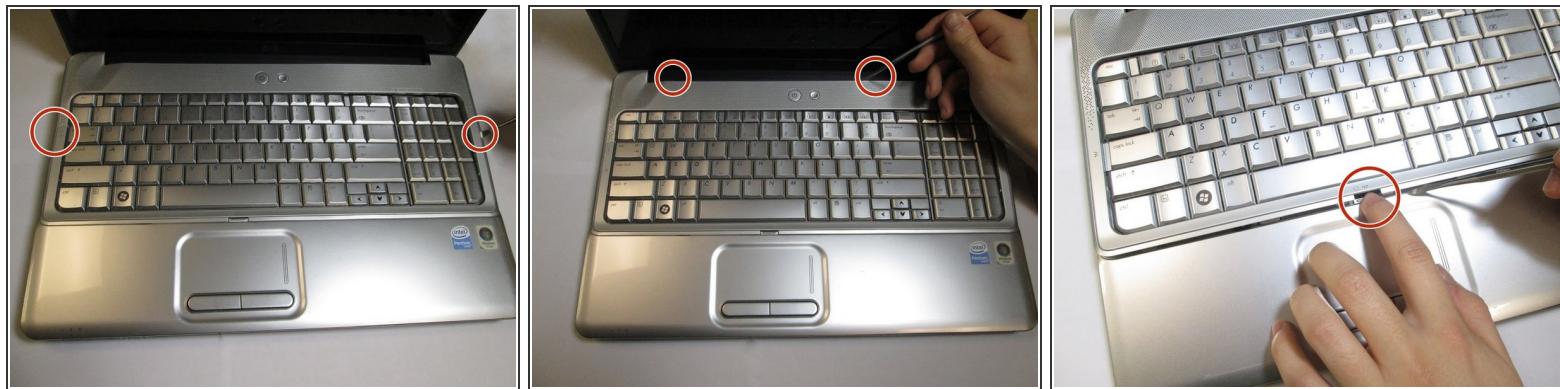

**⚠** Do not force if the frame is not coming out. It may break the clip of the frame.

- After the screws from battery house are removed, open the laptop to remove the keyboard frame.
- Approach the frame on the side by using the prying tool. Carefully remove the clip. Watch out not to break the clip.
- Then use the prying tool to carefully remove the frame from the top. Be careful not to break the clip.
- Then, press the button located top of the touch pad to completely remove the frame from the bottom of the frame.

## Step 3

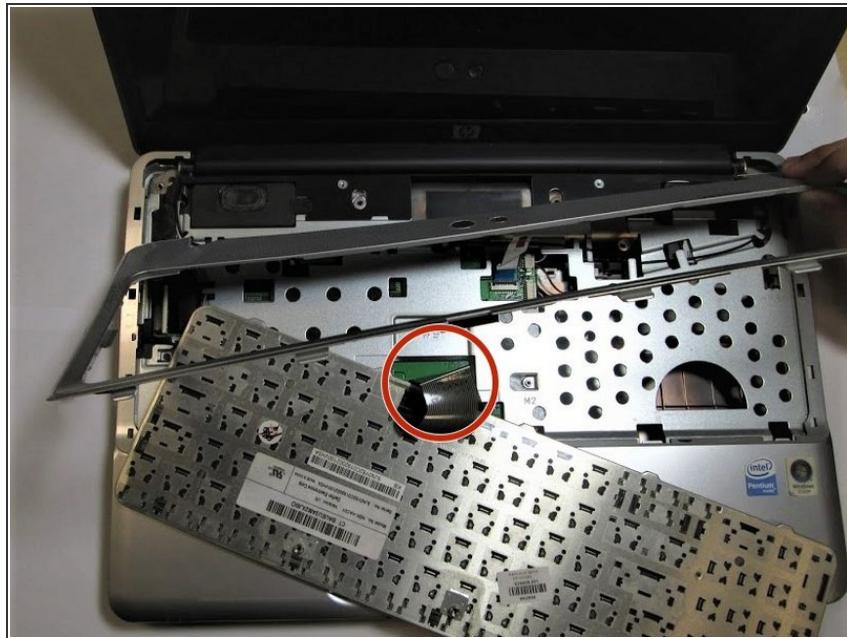

- When the frame is removed, keyboard will be free to be removed. There is cable ribbon to be removed. Gently pull out the ribbon from where it is plugged.
- The keyboard is now detached from the computer.

To reassemble your device, follow these instructions in reverse order.