




HP Pavilion G7-2235DX Screen Replacement

This guide will show you how to replace the screen on your laptop, if necessary.

Written By: Bre'Anna Sanders

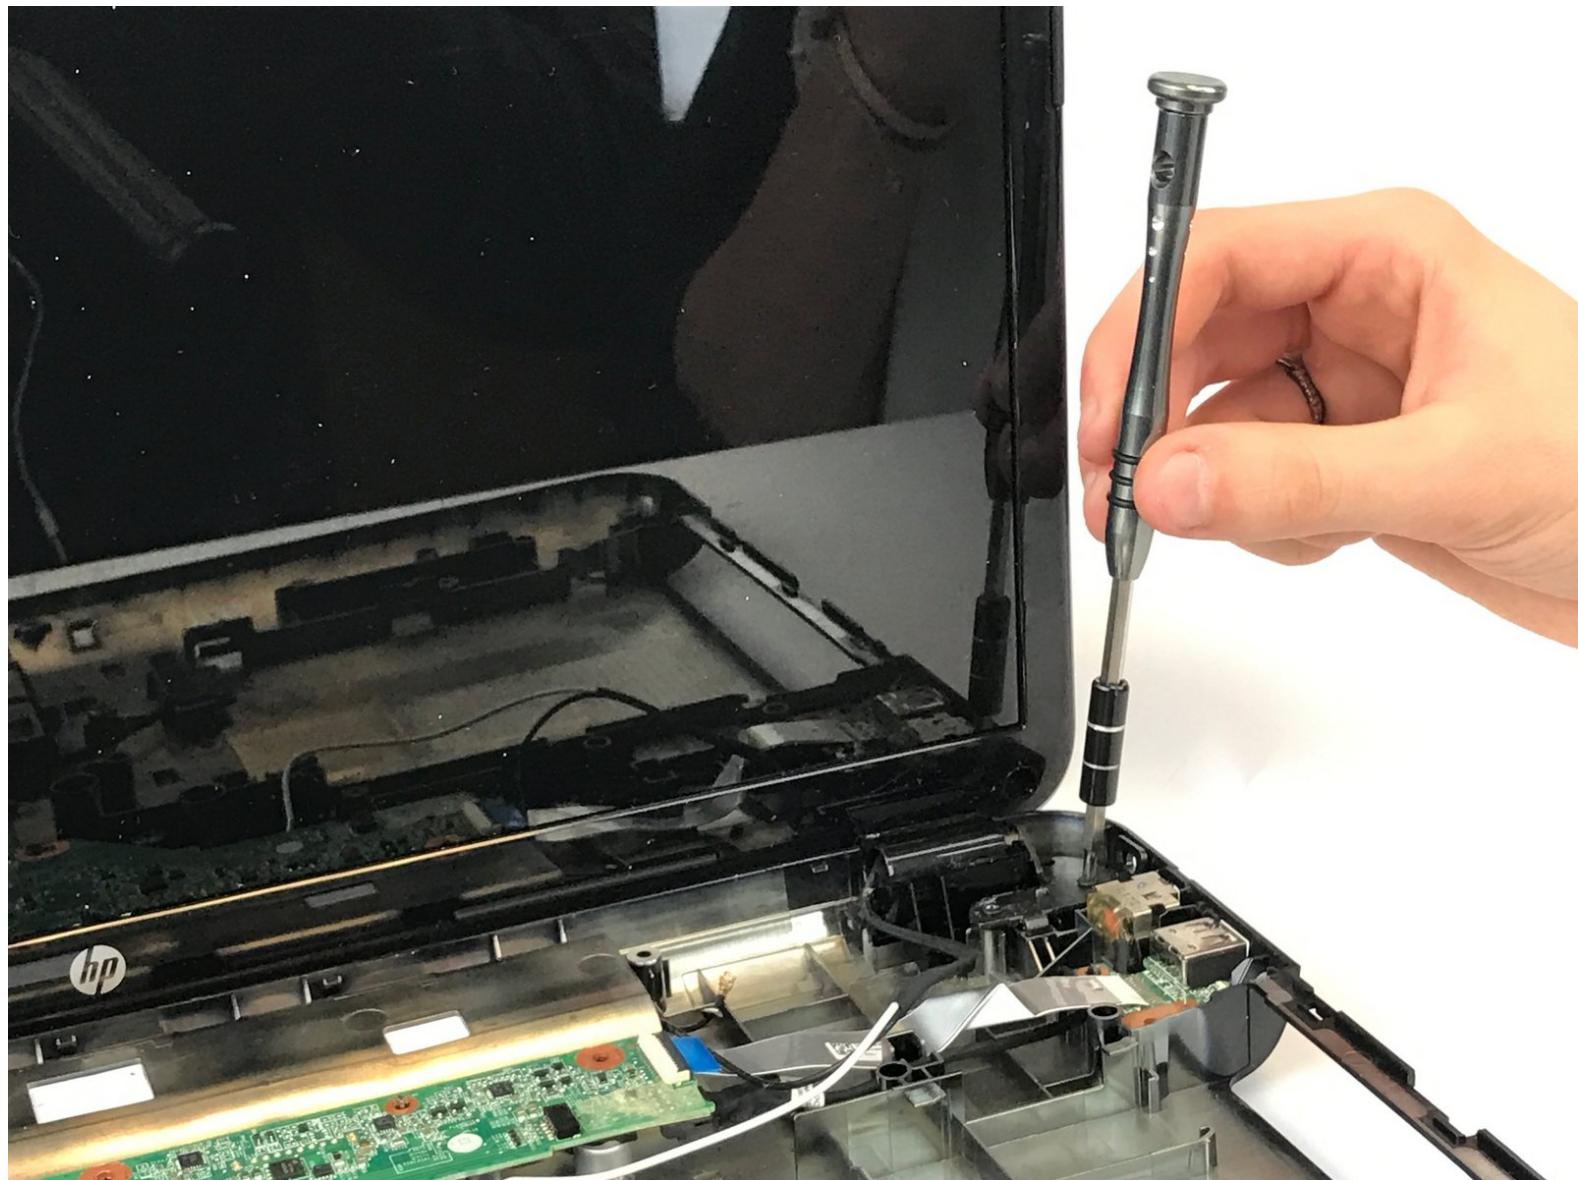

 **TOOLS:**


- [Spudger \(1\)](#)
- [iFixit Opening Tools \(1\)](#)
- [Phillips #0 Screwdriver \(1\)](#)
- [64 Bit Driver Kit \(1\)](#)

Step 1 — Fan




- Flip the laptop over and remove six 7.25mm screws.

Step 2

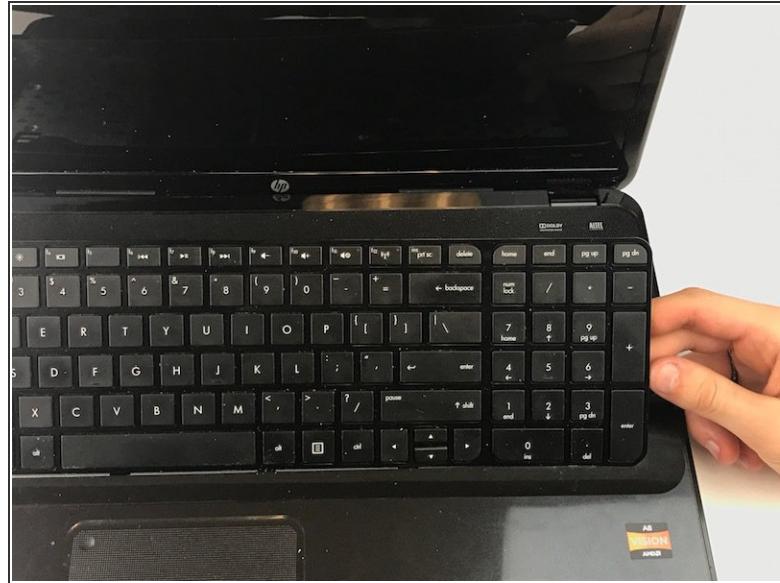

- Using the plastic opening tool or spudger, separate the keyboard from the frame of the laptop.
- Gently pull the keyboard away from the laptop, toward you, until it is completely separated from the laptop.

Step 3

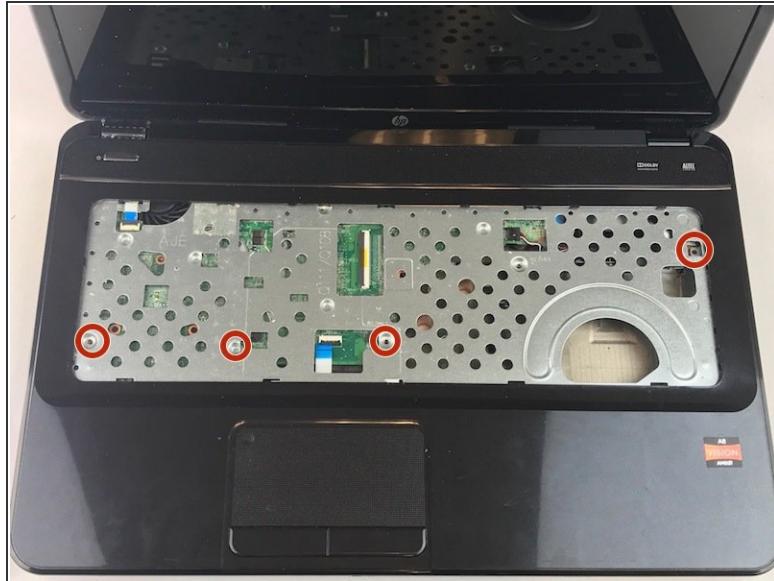


- Remove the four 7.25mm screws located by the red markers.

Step 4



- Gently lift the panel up, exposing the inside of the laptop.

Step 5

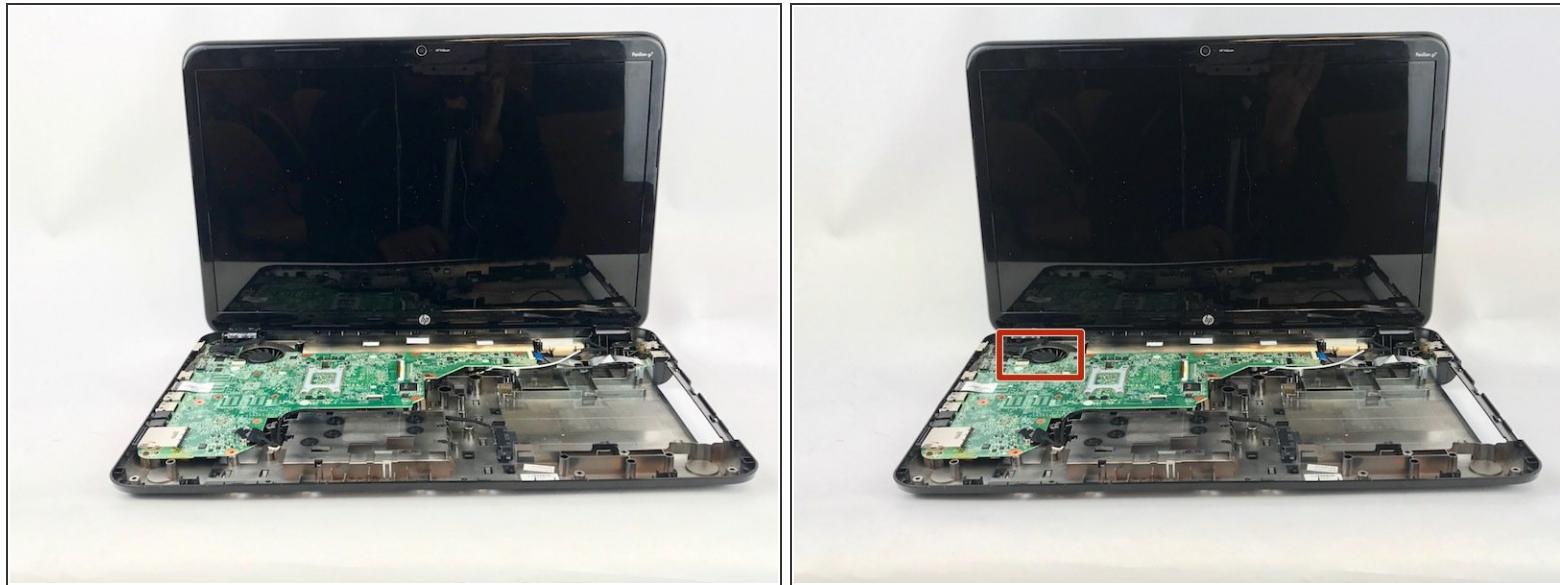



- The fan is located in the top, left hand corner. Now, it can be gently lifted out using your hands.

Step 6 — Screen



- To remove the laptop's screen, you will have to remove a total of four 7.25mm screws.
- First, remove the two 7.25mm screws found in the upper right corner as shown.

Step 7

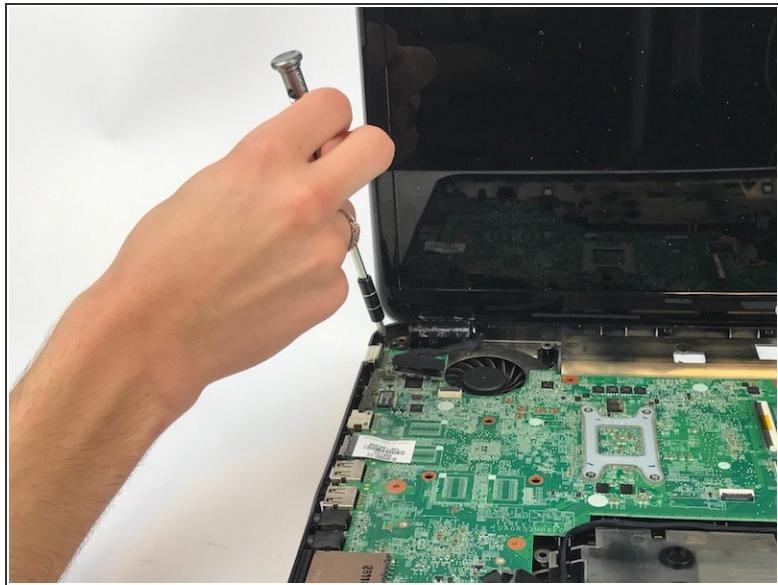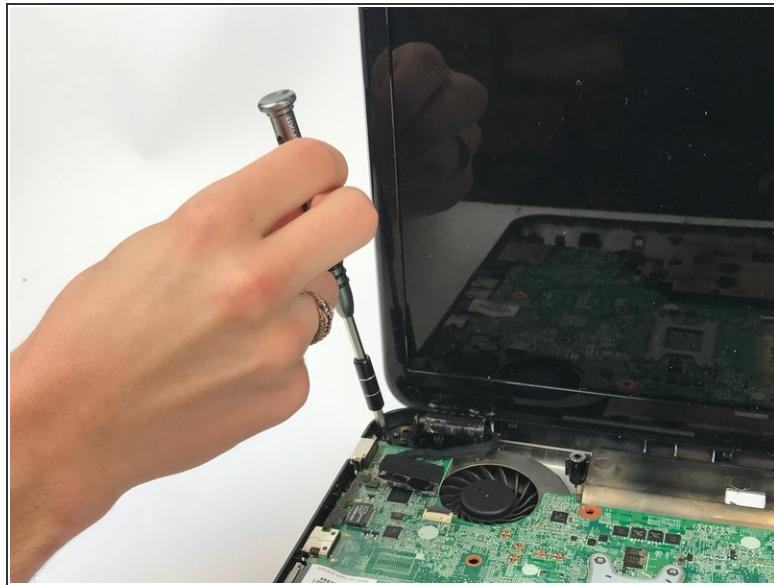

- Next, unscrew the two 7.25mm screws in the upper left corner of the laptop as shown.

Step 8



- Once all of the screws have been removed, gently lift the laptop's screen from the base of the computer.

To reassemble your device, follow these instructions in reverse order.