




HP Pavilion G7-2289wm Touchpad Replacement

This guide provides instruction on how to replace a broken or damaged touch pad.

Written By: Ryson Smith

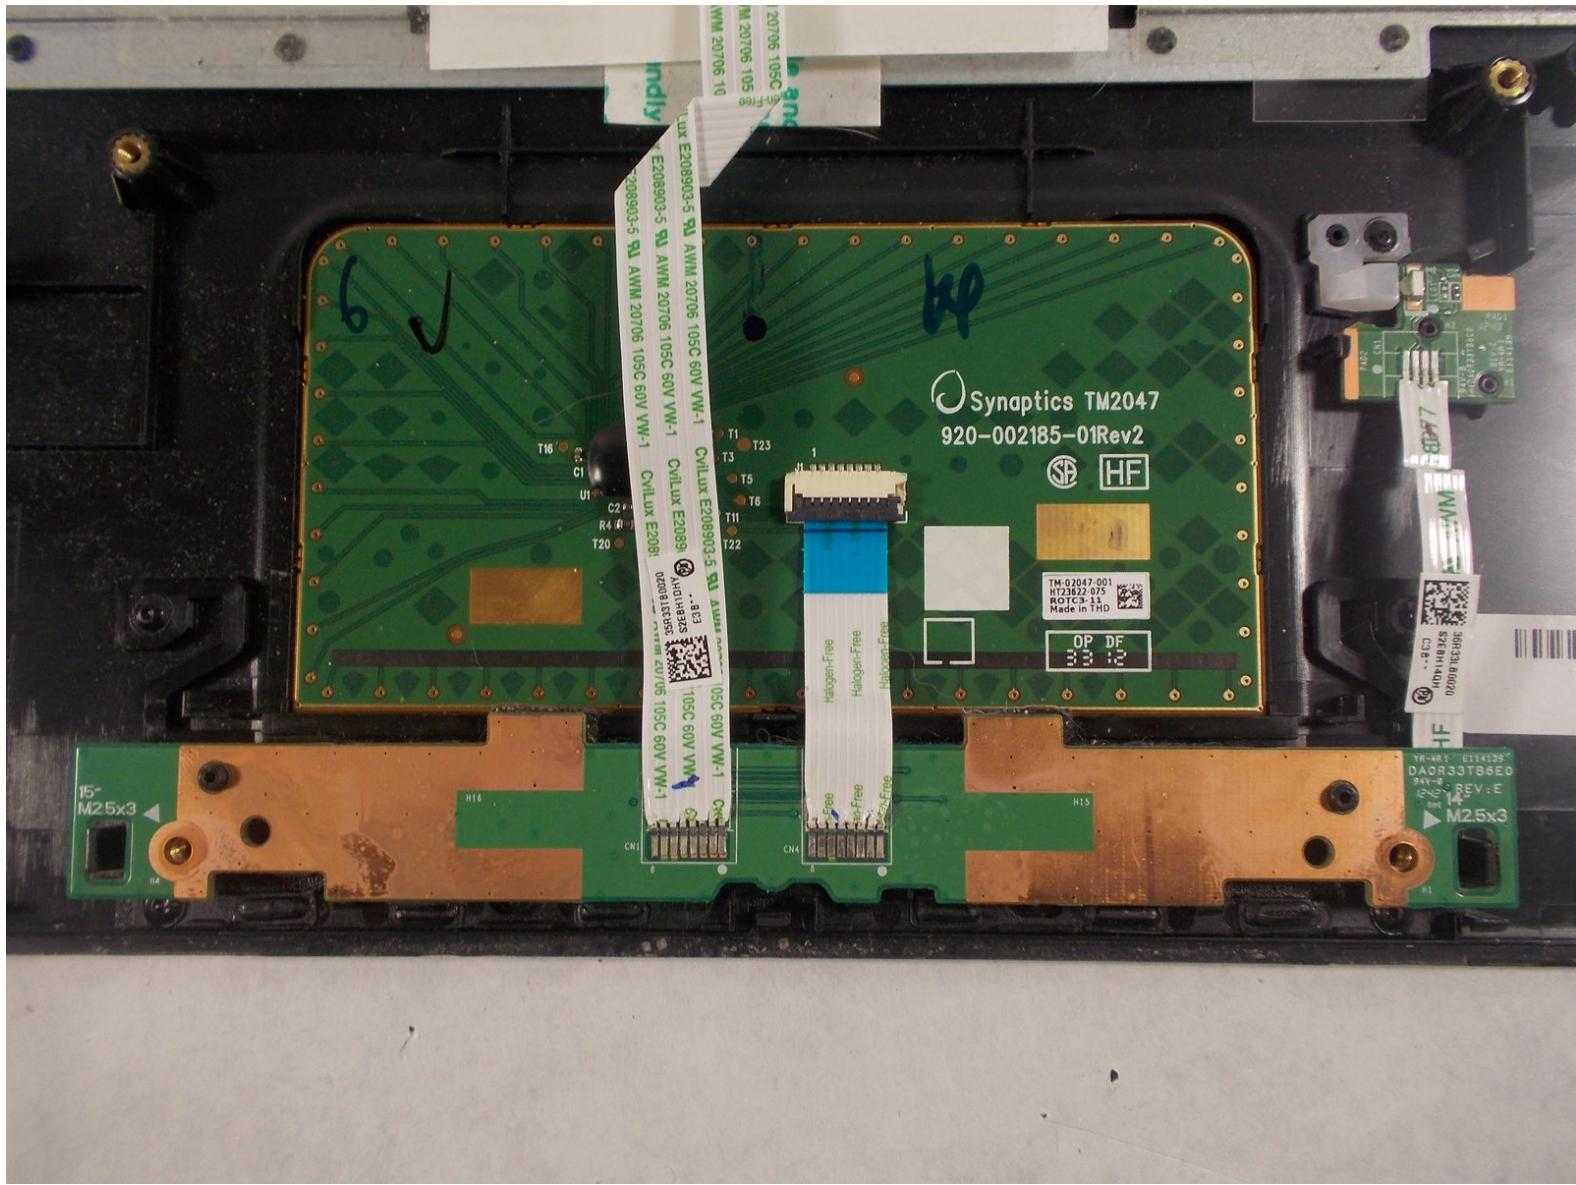


INTRODUCTION

This guide provides instruction on how to replace a broken or damaged touch pad on the HP Pavilion G7-2289wm laptop.

TOOLS:


- [Phillips #0 Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)

Step 1 — Battery

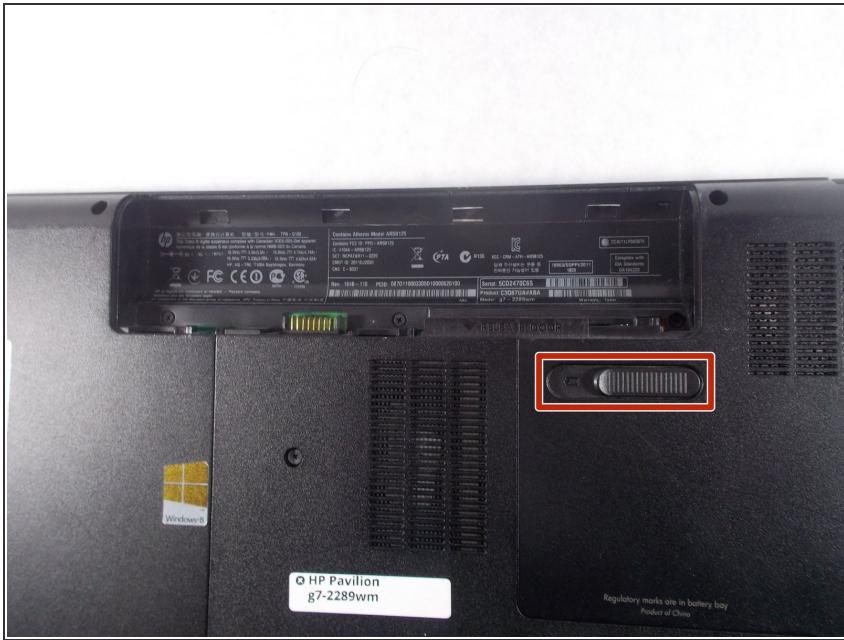


- Slide the battery release latch to the left, towards the center of the laptop.
- Lift the battery up, and pull towards the center of the laptop to remove it.

Step 2 — Hard Drive

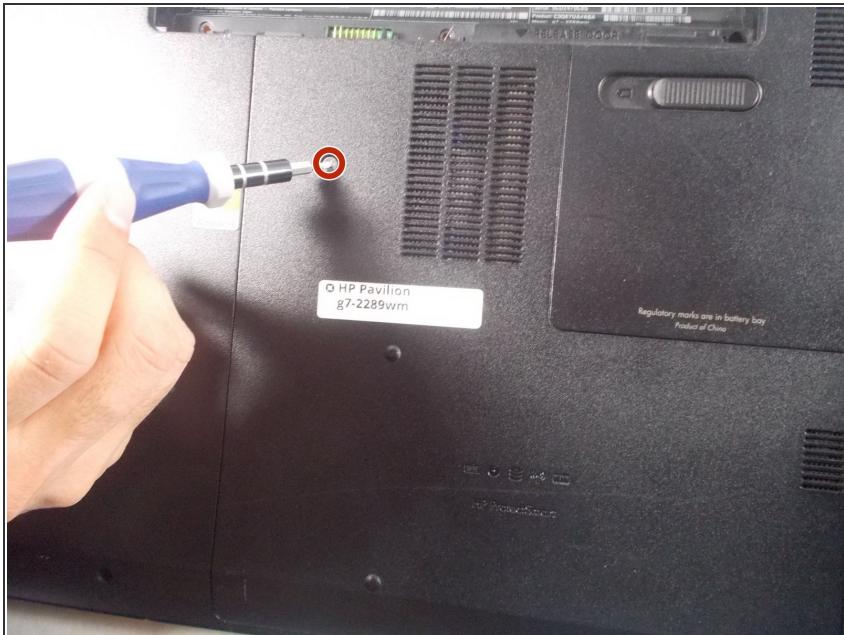

- Loosen the screw that secures the service cover.
- Pull the edge of the service cover toward you to remove it.

Step 3

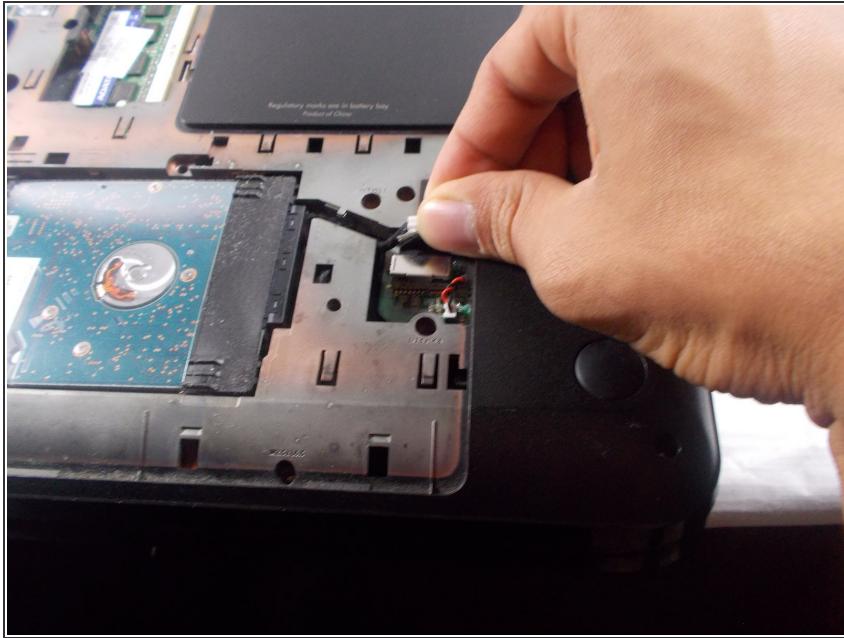

- Disconnect the hard drive connector cable from the motherboard.

Step 4



- Lift the front edge of the hard drive, then pull the hard drive out gently.

Step 5 — Keyboard





- Remove the screw that secures the keyboard to the computer.

Step 6




- Using the prying tool, pry about the perimeter of the keyboard.
- Now lift the keyboard from its top backward towards the touch pad.
- Notice the connector cable, unlatch it and remove the keyboard.

Step 7 — Touchpad

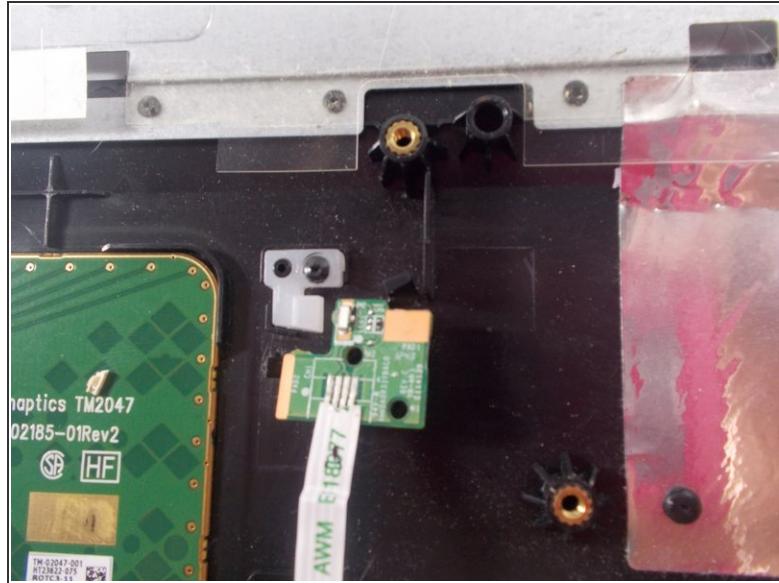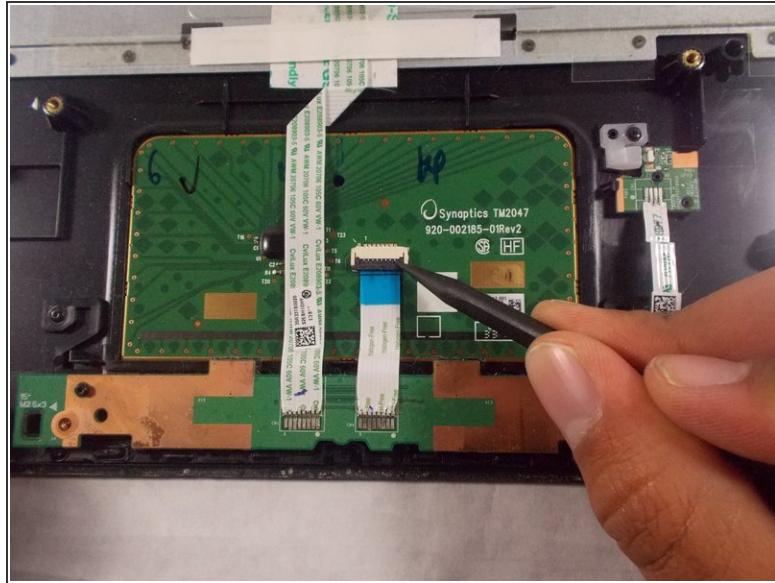

- Remove the wires attached to the button pad.

Step 8

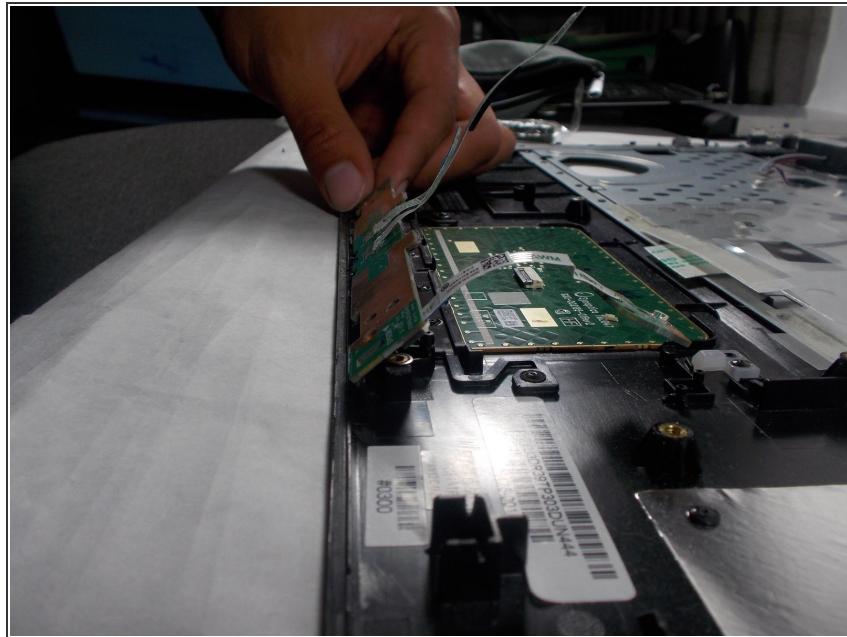

- Carefully lift and remove the button board.

Step 9



- Remove all screws from the bottom of the laptop.

To reassemble your device, follow these instructions in reverse order.