



HP Pavilion TouchSmart 14z-n100 Ram Replacement

How to replace the RAM in an HP Pavilion TouchSmart 14z-n100.

Written By: Daniel Zwißler



INTRODUCTION

If you need to install new ram in your HP Pavilion Touch Smart, follow this guide. Required tools for the replacement of RAM are a phillips #1 screwdriver and iFixit opening tools.

TOOLS:

- [Phillips #1 Screwdriver \(1\)](#)
- [iFixit Opening Tools \(1\)](#)

PARTS:


- [RAM \(1\)](#)

Step 1 — Ram



- Remove the two #1 Phillips 4mm screws that hold the cover in place.

Step 2

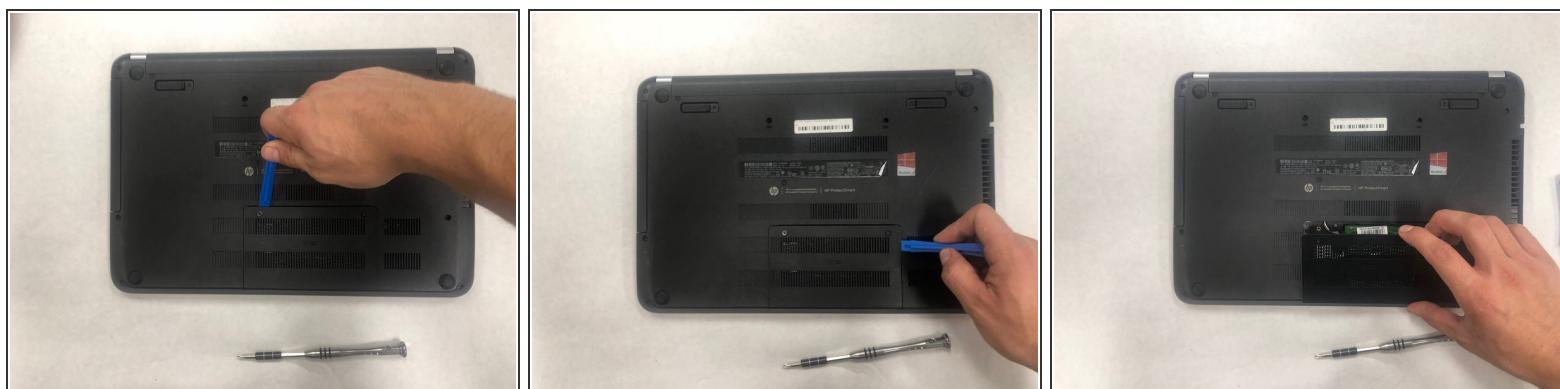

- Use the plastic opening tool to remove the cover. There are several clips that hold it on.
- Carefully slide the plastic opening tool under the edge of the cover until it comes loose.
- You can now remove the cover.

Step 3



- There are 4 clips total, one on each side of the RAM.
- Remove the ram by pushing the clamps outward, away from the ram
- After the pushing the clamps outward the ram should lift up and be able to slide out.

To reassemble your device, follow these instructions in reverse order.