



# HP Pavilion dv2913cl Keyboard Replacement

This repair guide will accomplish the task of replacing the keyboard on the device.


Written By: Adam Braga



 **TOOLS:**


- [iFixit Opening Tools \(1\)](#)
- [JIS Driver Set \(1\)](#)

## Step 1 — Keyboard

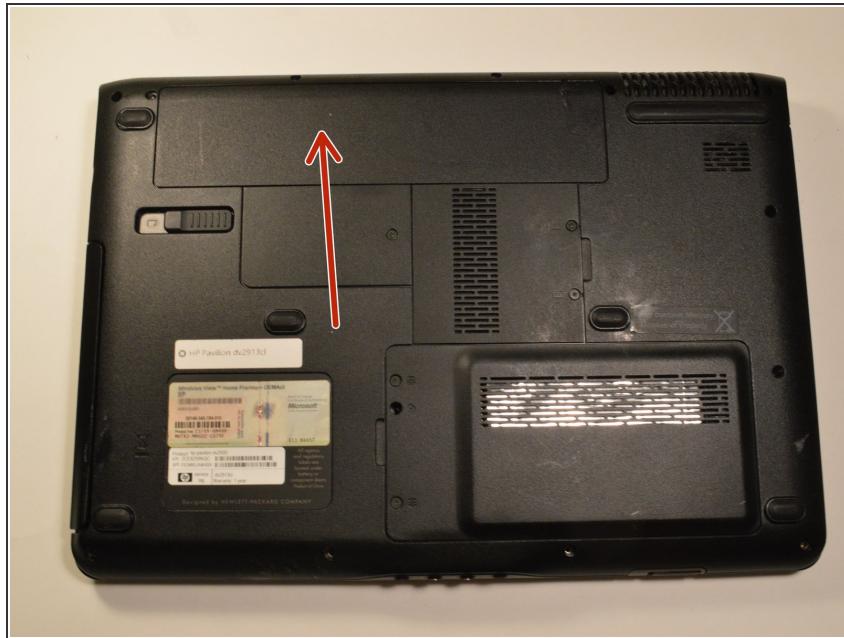


- Locate battery on the bottom of the laptop.

## Step 2

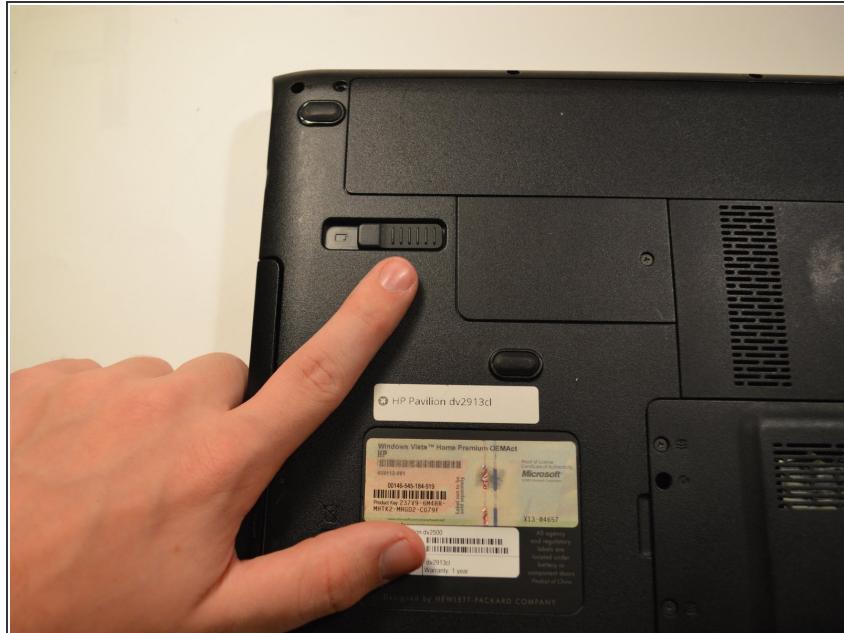

- Slide the battery release bar to the left, this should release the battery so you can then remove it.

## Step 3

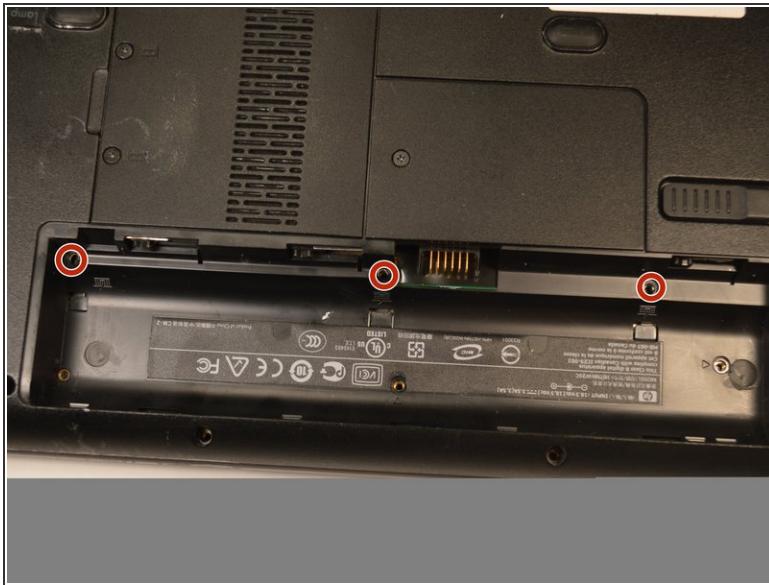


- Locate the three screws for the keyboard by finding the small keyboard picture, remove these screws and flip the laptop back over.

## Step 4



- Open the laptop so the keyboard is facing upwards and towards you.



## Step 5

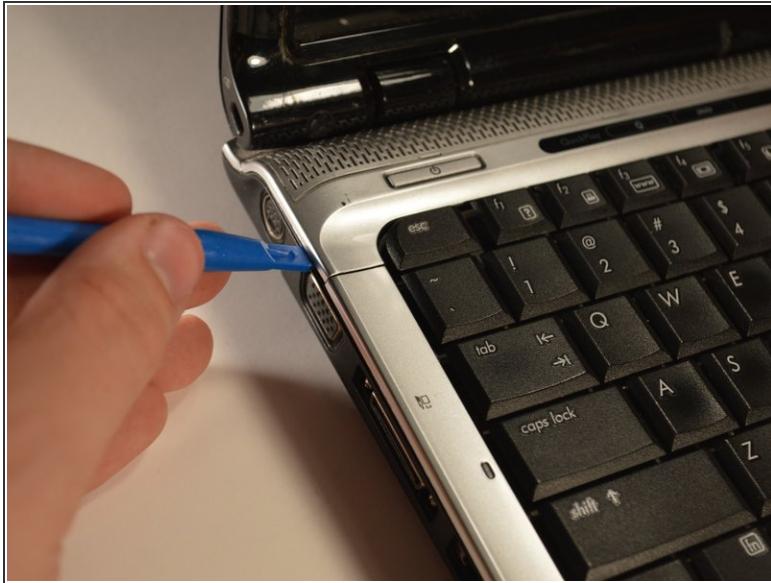

- Use the plastic opening tool to get underneath the plastic bar above the keyboard, pry upwards. Pry the keyboard upwards gently.

**⚠** Be careful not to pull the keyboard too hard so you do not rip the silver ribbon cable attached to the laptop.

## Step 6

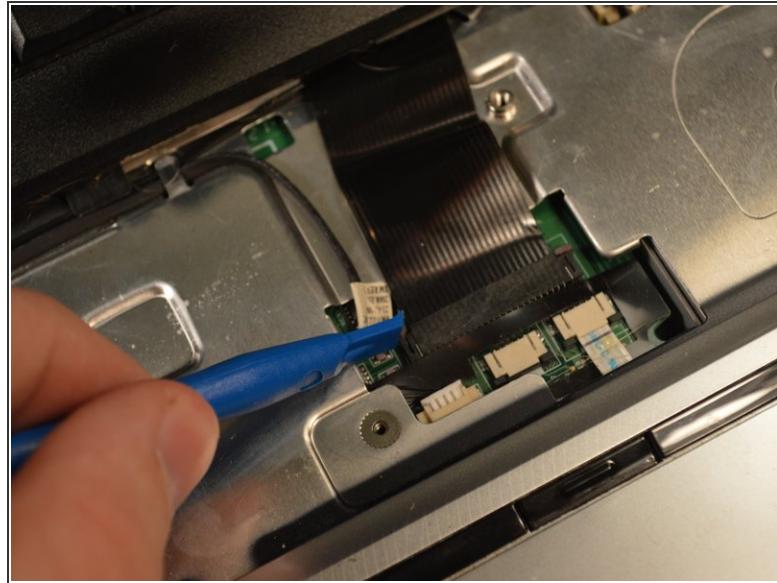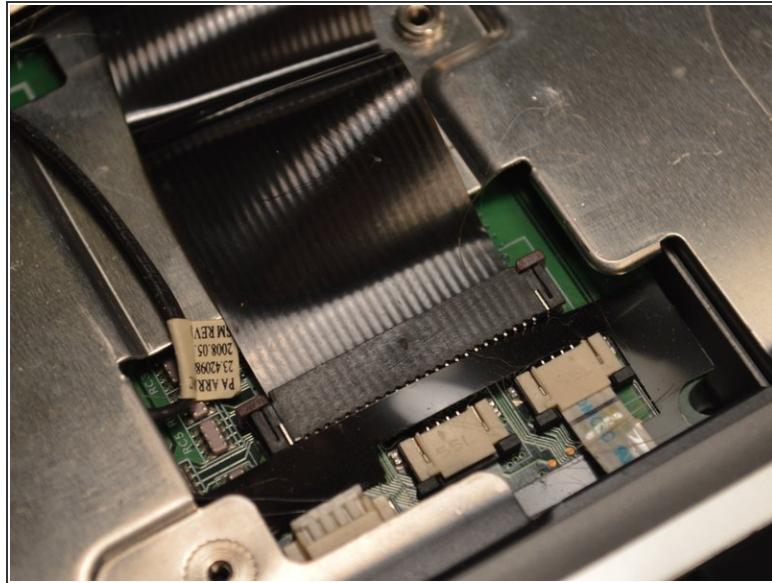

- Release the ribbon cable by using a flathead screw driver. Release the two tabs holding the cable and pull outwards.
- Pull the keyboard up and out from the laptop.

To reassemble your device, follow these instructions in reverse order.