



# HP Pavilion dv7-1285dx Back Plate Replacement

This guide will provide instructions for a user to remove the device back plate, which allows the user access to many other device parts.

Written By: Chris Apple



This document was generated on 2019-09-18 03:39:41 PM (MST).

## INTRODUCTION

The guide will show you how to remove the device back plate.

### TOOLS:


- [Phillips #1 Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)

## Step 1 — Battery



- Ensure the device is powered down and unplugged.
- Turn the device upside down with the battery compartment facing you.
- Slide the black slider to the right and lift the battery out of its compartment.


## Step 2 — Back Plate

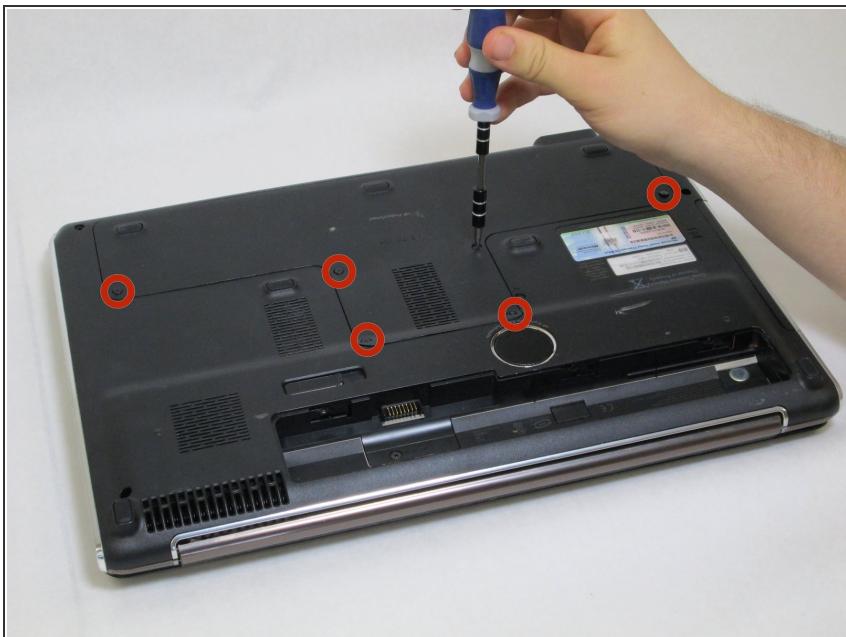

- Locate and remove the six Phillips PM2.5×7.0 screws around the perimeter of the back plate.

*(i)* These screws do not completely detach from the device when unscrewed.

## Step 3

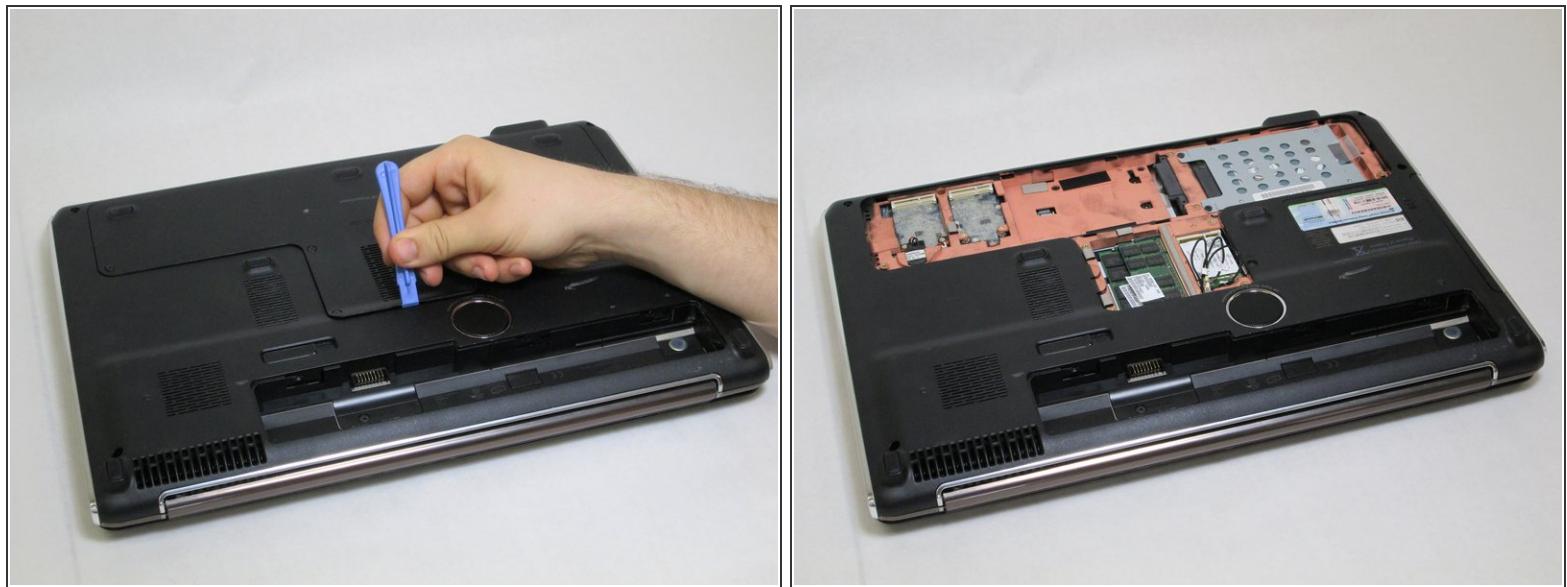

- Use the plastic opening tool to lift up the back plate and set it aside.

To reassemble your device, follow these instructions in reverse order.