




HP Pavilion g7-1365dx Keyboard Replacement

This guide will provide a step by step instruction on how to replace the keyboard on your HP Pavilion g7-1365dx. Use this guide if keyboard is faulty.

Written By: jonathan Rodriguez

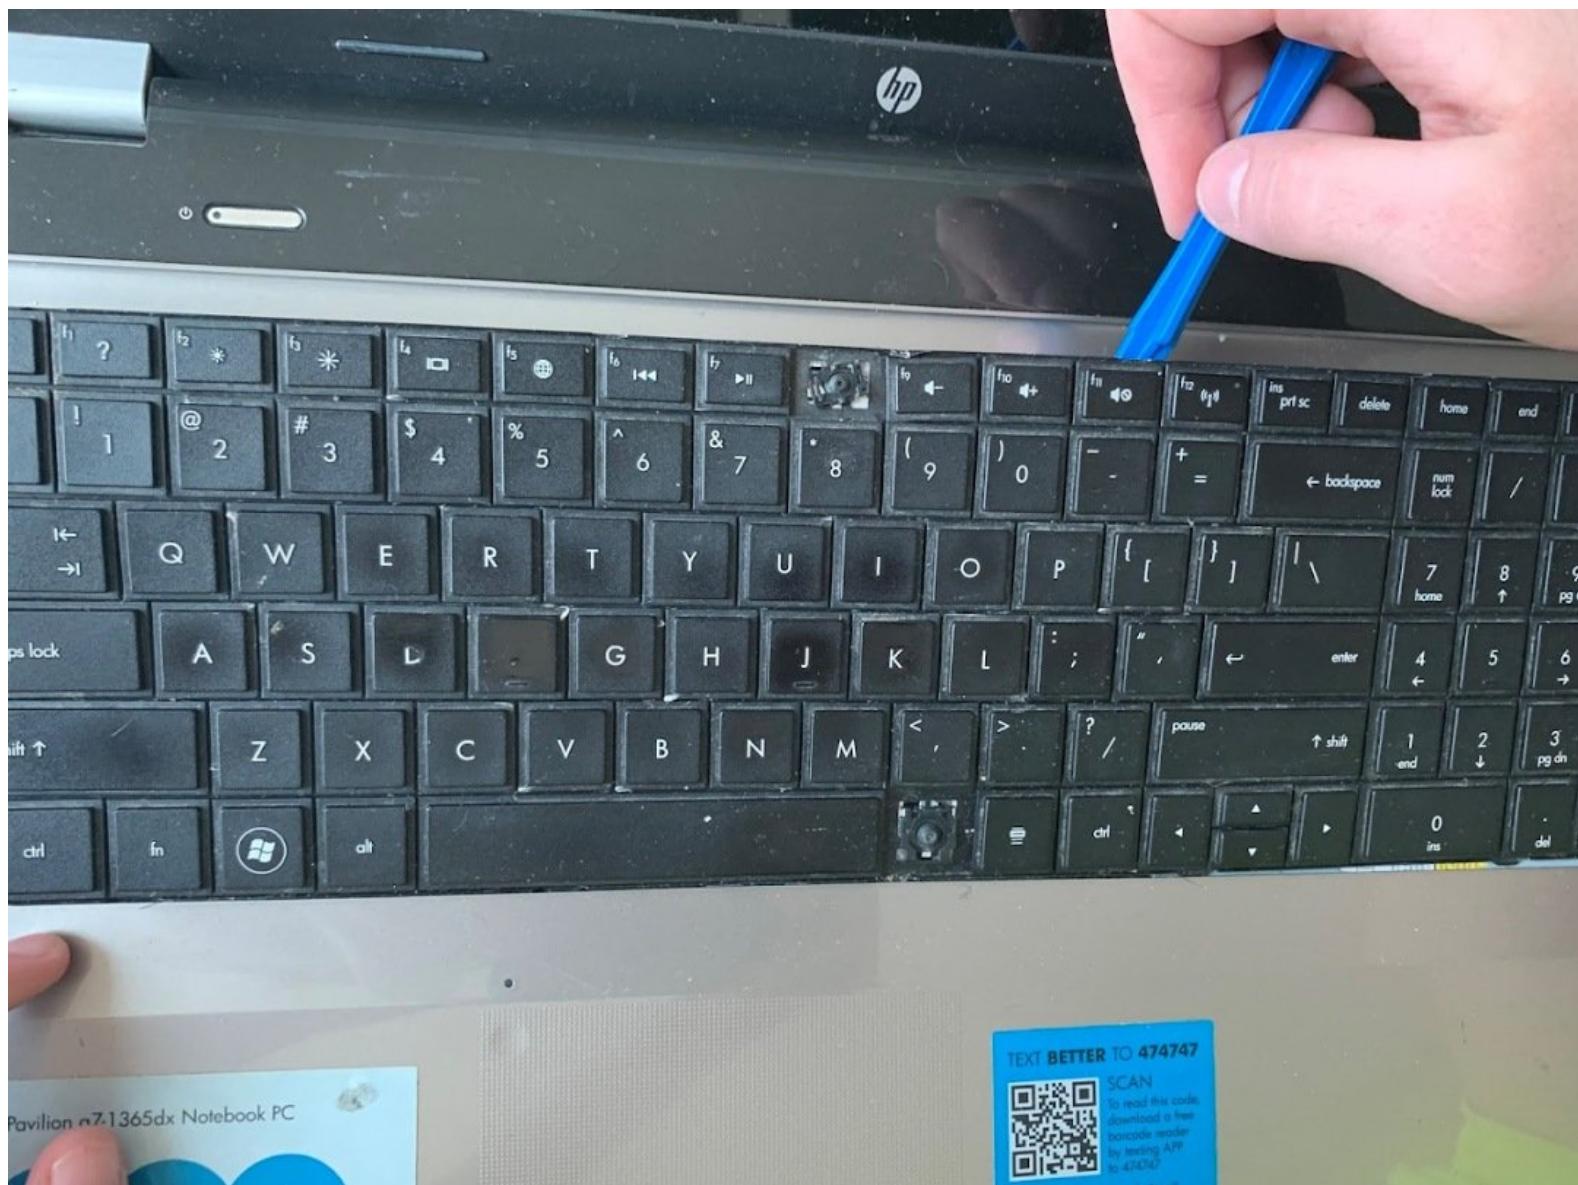

INTRODUCTION

This guide will provide a step by step instruction on how to replace the keyboard on your HP Pavilion g7-1365dx. Use this guide if keyboard has already been diagnosed that it is damage and there is no other solution other than replacing the the keyboard.

TOOLS:

- [Phillips #0 Screwdriver](#) (1)
- [Phillips #00 Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)
- [2mm Hex Key](#) (1)

Step 1 — Battery



! To prevent injury, make sure the laptop is powered off before removing the battery.


- Flip the laptop so that it is upside down and opens away from you. This exposes the battery, it will be centered at the bottom of the laptop
- Push the switch above the battery towards the center of the laptop .

Step 2




- While pushing the switch, lift the battery by the side closest to the switch up and away from the laptop.

Step 3 — Service Door

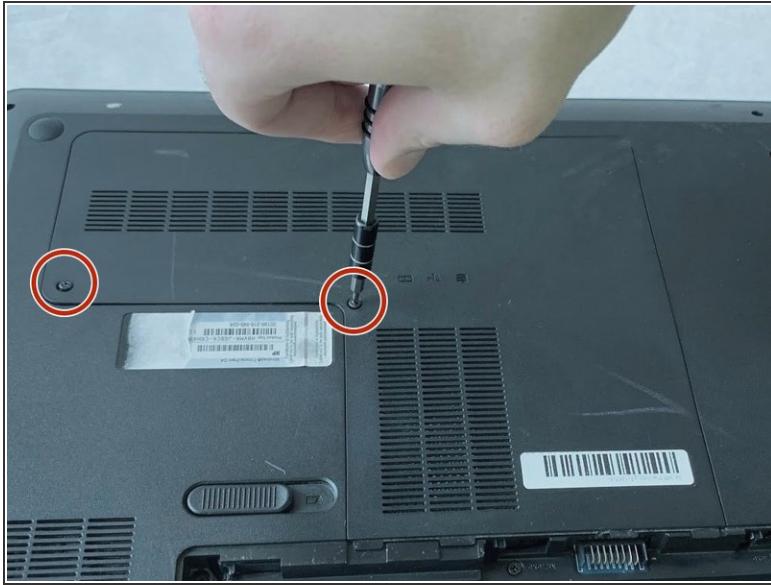

- Using a Phillips size 0 screwdriver, unscrew the 2 Phillips screws.
- Use the opening tool around the edges of the service door to loosen it and remove it.

Step 4 — Keyboard

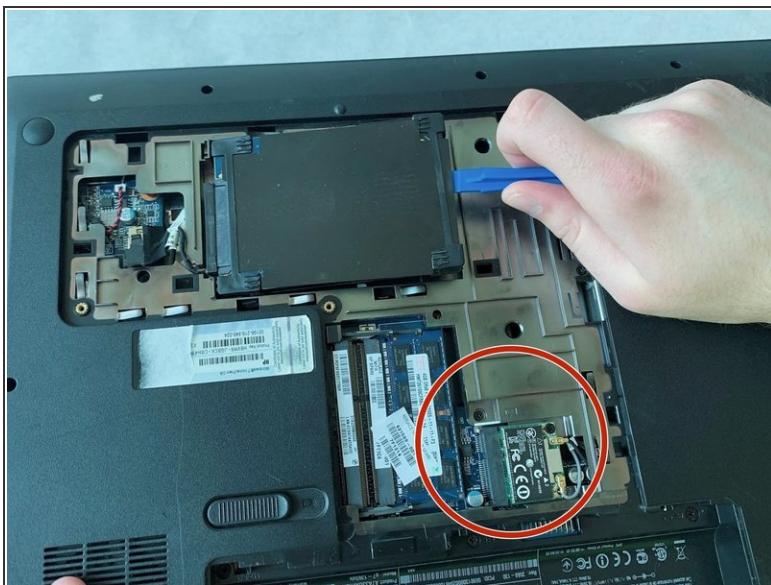


- Remove the 4.7 mm screw that secures the keyboard to the computer using the Philips 00 screwdriver.

Step 5




- Rest the laptop on its side so the optical drive is pointing up.
- Insert the hex 2.0 screwdriver into the screw hole that had the 4.7 mm screw, press till the keyboard pops out.

Step 6

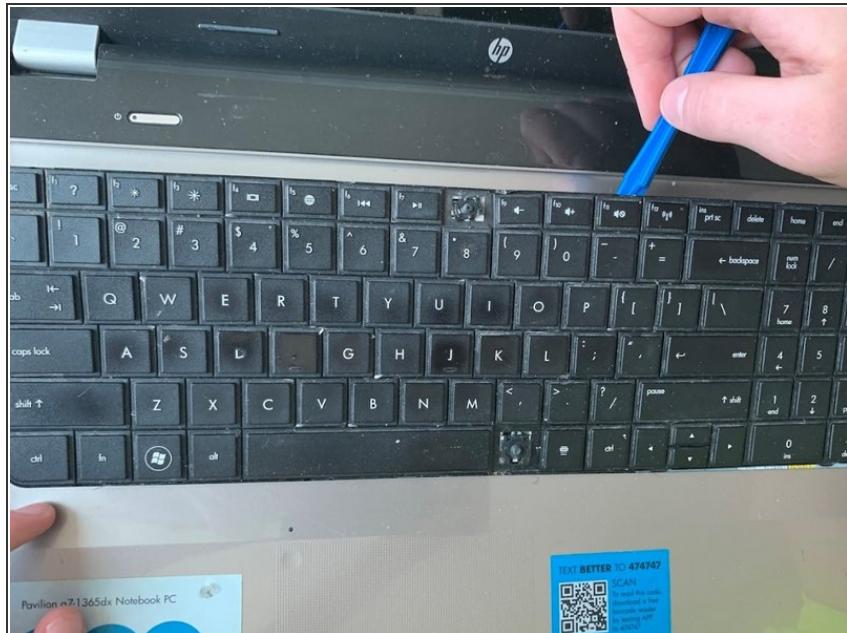

- Turn the laptop right side up, facing you. Use the opening tool to help pull the keyboard towards you.

Step 7

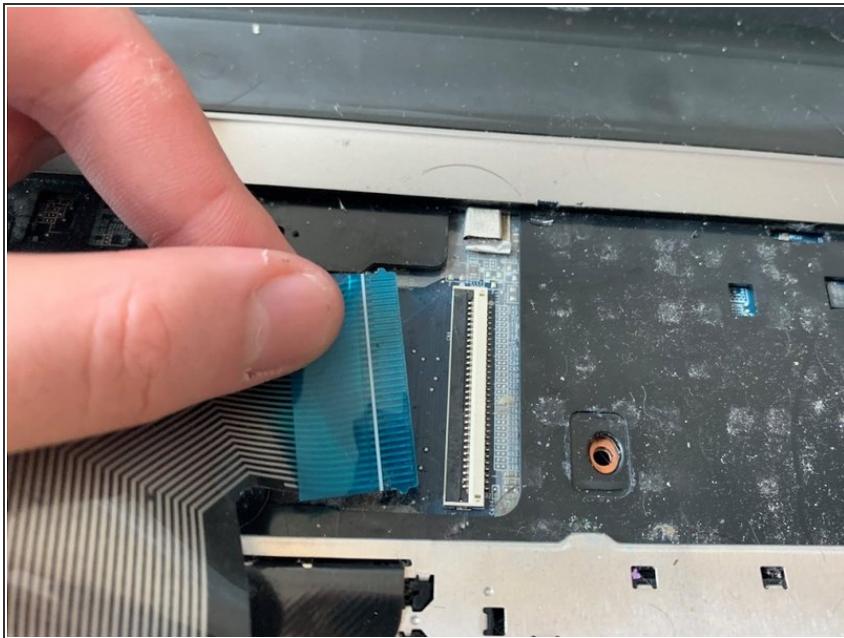

- Unplug the keyboard ribbon cable and remove the keyboard.

To reassemble your device, follow these instructions in reverse order.