




HP Pavilion x360 14-ba253cl Battery Replacement

This guide will demonstrate how to replace the battery in the HP Pavilion x360 14-ba253cl.

Written By: ryan reichard

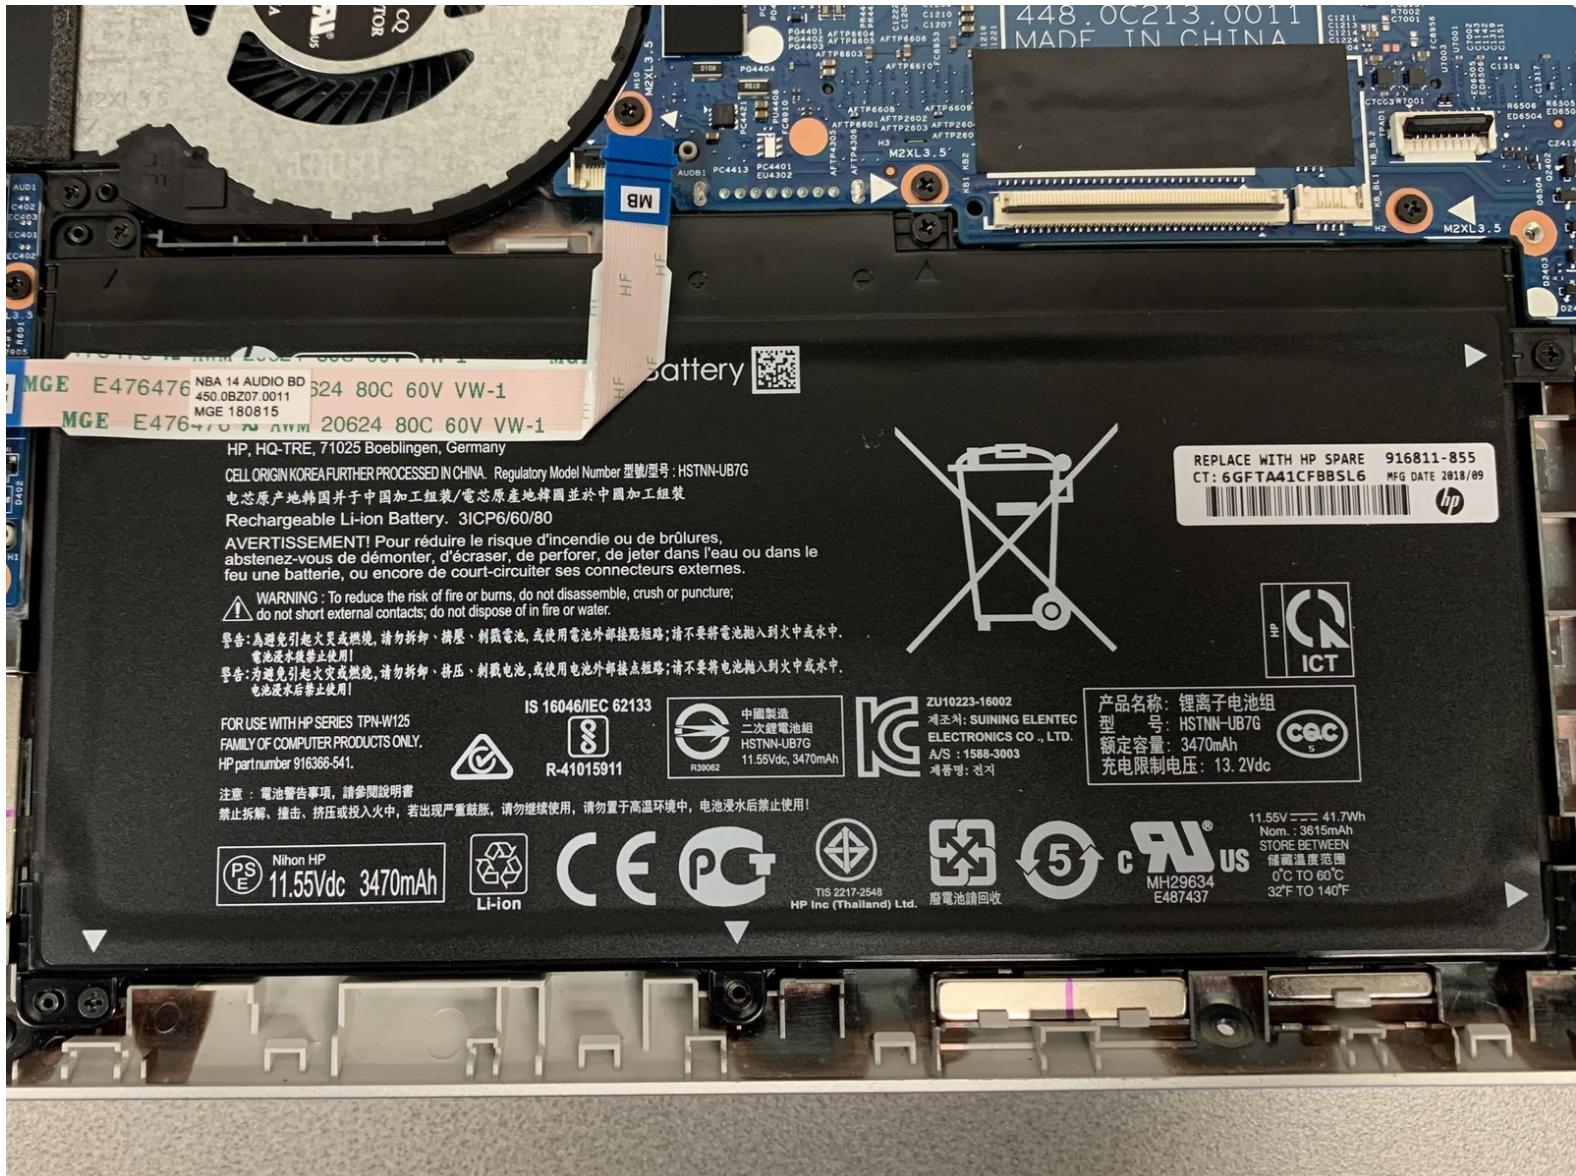

INTRODUCTION

If your HP Pavilion x360 14-ba253cl has limited power refer to our [troubleshooting page](#).

TOOLS:


- [Spudger](#) (1)
- [Jimmy](#) (1)
- [iFixit Opening Picks set of 6](#) (1)
- [Phillips #0 Screwdriver](#) (1)

Step 1 — Keyboard




- Use the Jimmy to remove the footpads located at the bottom of the laptop.

Step 2

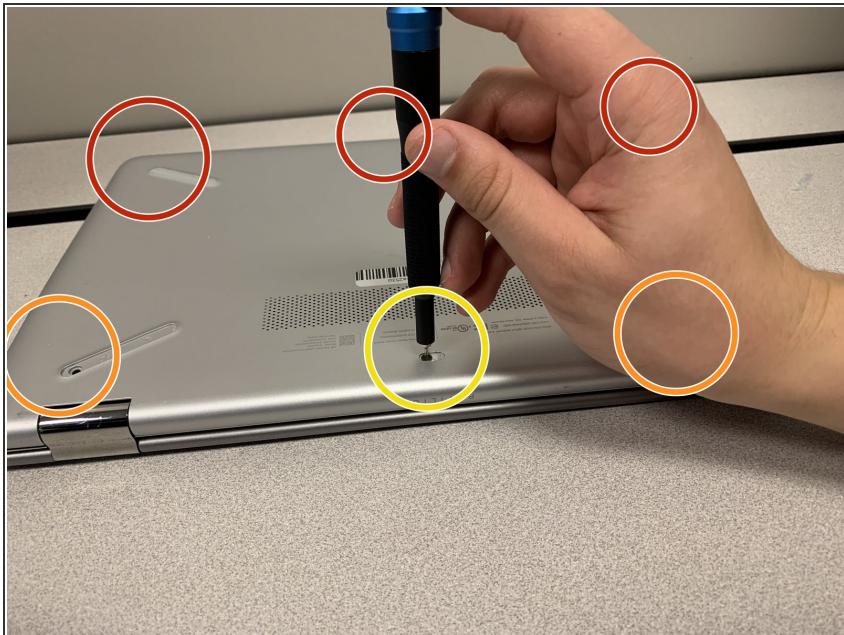


- Remove three 4.0mm Phillips #0 screws from the top of the cover.
- Remove two 6.0mm Phillips #0 screws underneath each of the back footpads.
- Remove one 4.0mm Phillips #0 screw beneath the divot.

Step 3

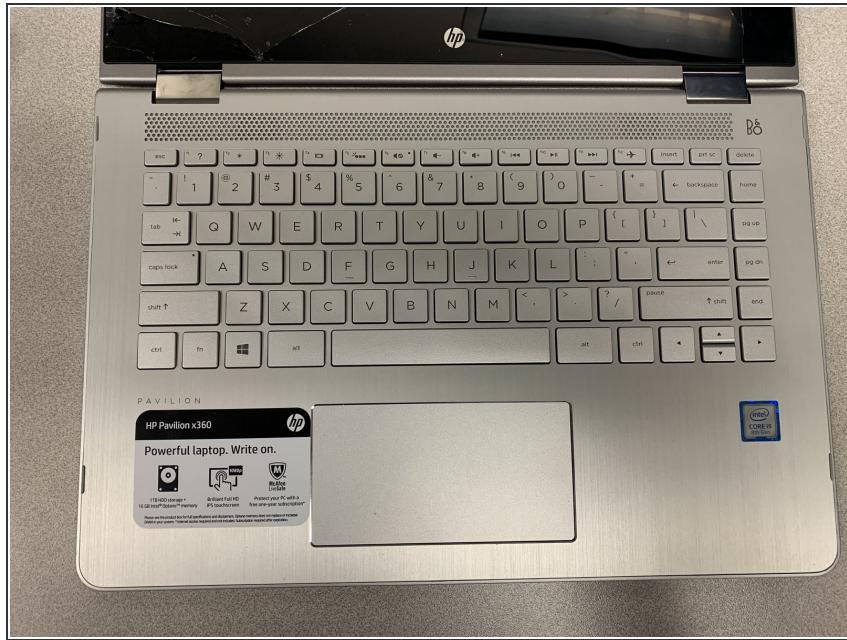


- Turn the computer onto its base, with the computer open and the keys facing upward.

Step 4

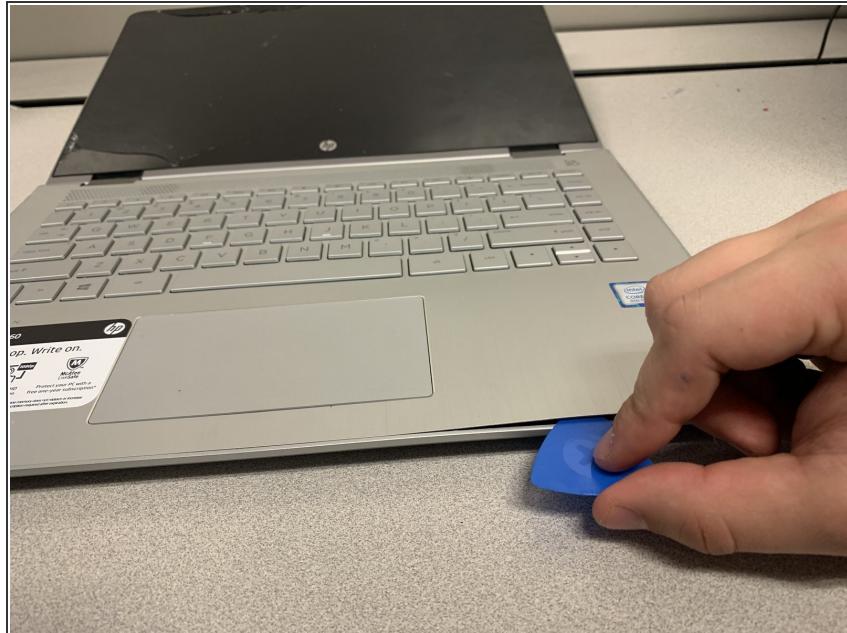


- Use an opening pick to separate the keyboard from the base of the laptop.

Step 5

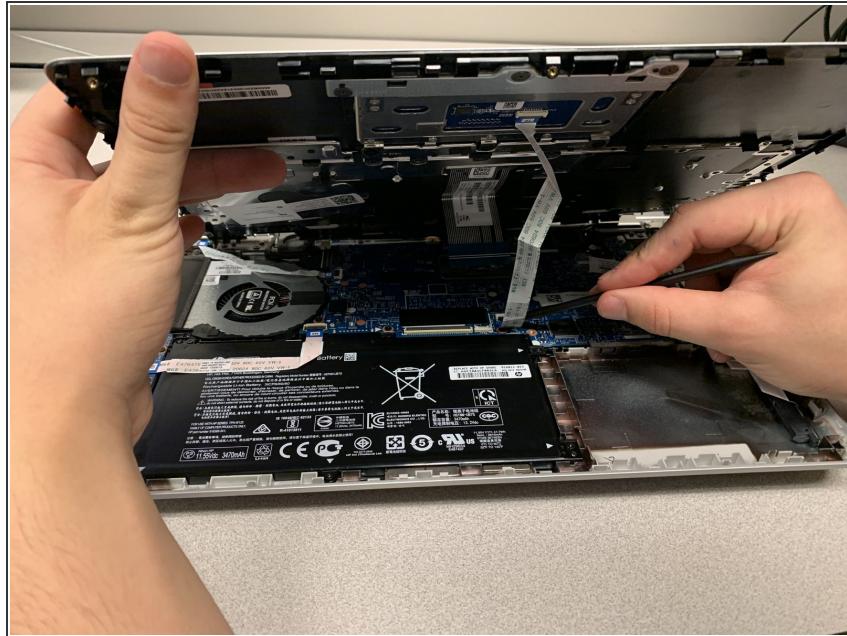


- Raise the keyboard slightly to gain access to the touch pad and keyboard cables.
- Using a spudger, lift up the plastic locks that connect the ribbon cable to the system board.
- Use the blue plastic tab on the ribbon cable to pull it out from the system board.
- Remove the keyboard from the laptop.

Step 6 — Battery

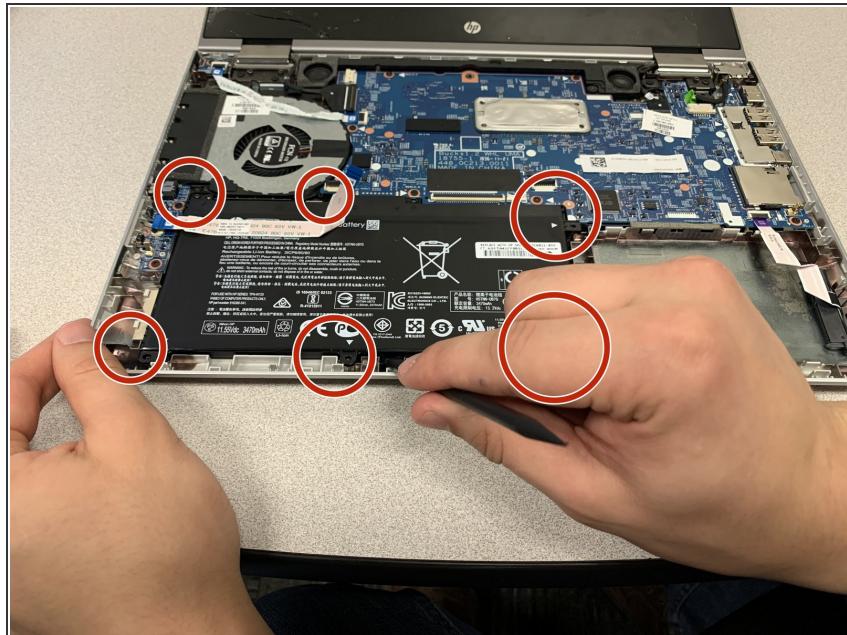

- Remove six 3mm Phillips #00 screws around the perimeter of the battery.

Step 7

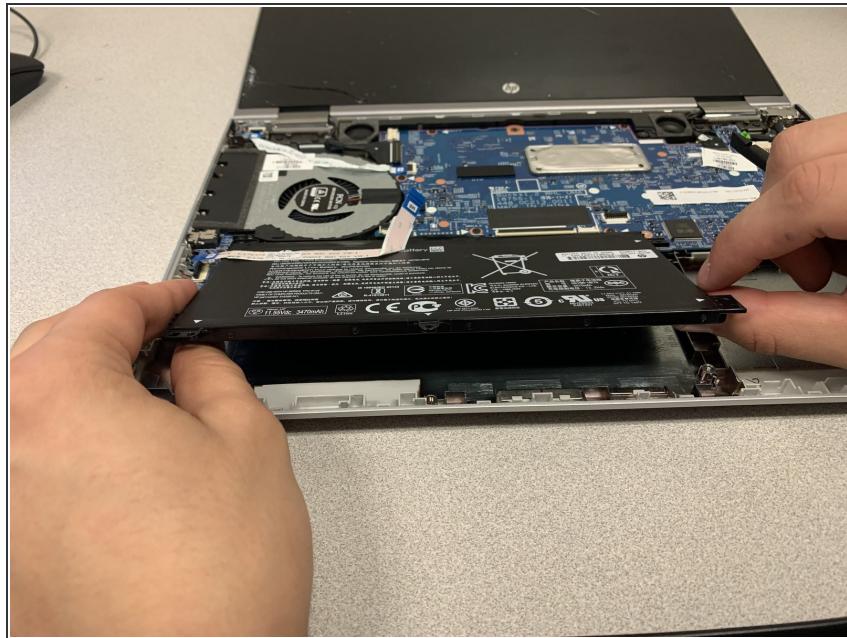

- Carefully lift the battery starting from the lower right corner and disconnect it from the system board.

To reassemble your device, follow these instructions in reverse order.