




# HP Pavillion dm1-3010nr Keyboard Replacement

If the entire keyboard fails to respond, one of the solutions is to replace the keyboard. This guide will help you on removing the keyboard.

Written By: Rosalia Olga Dupont Ayala

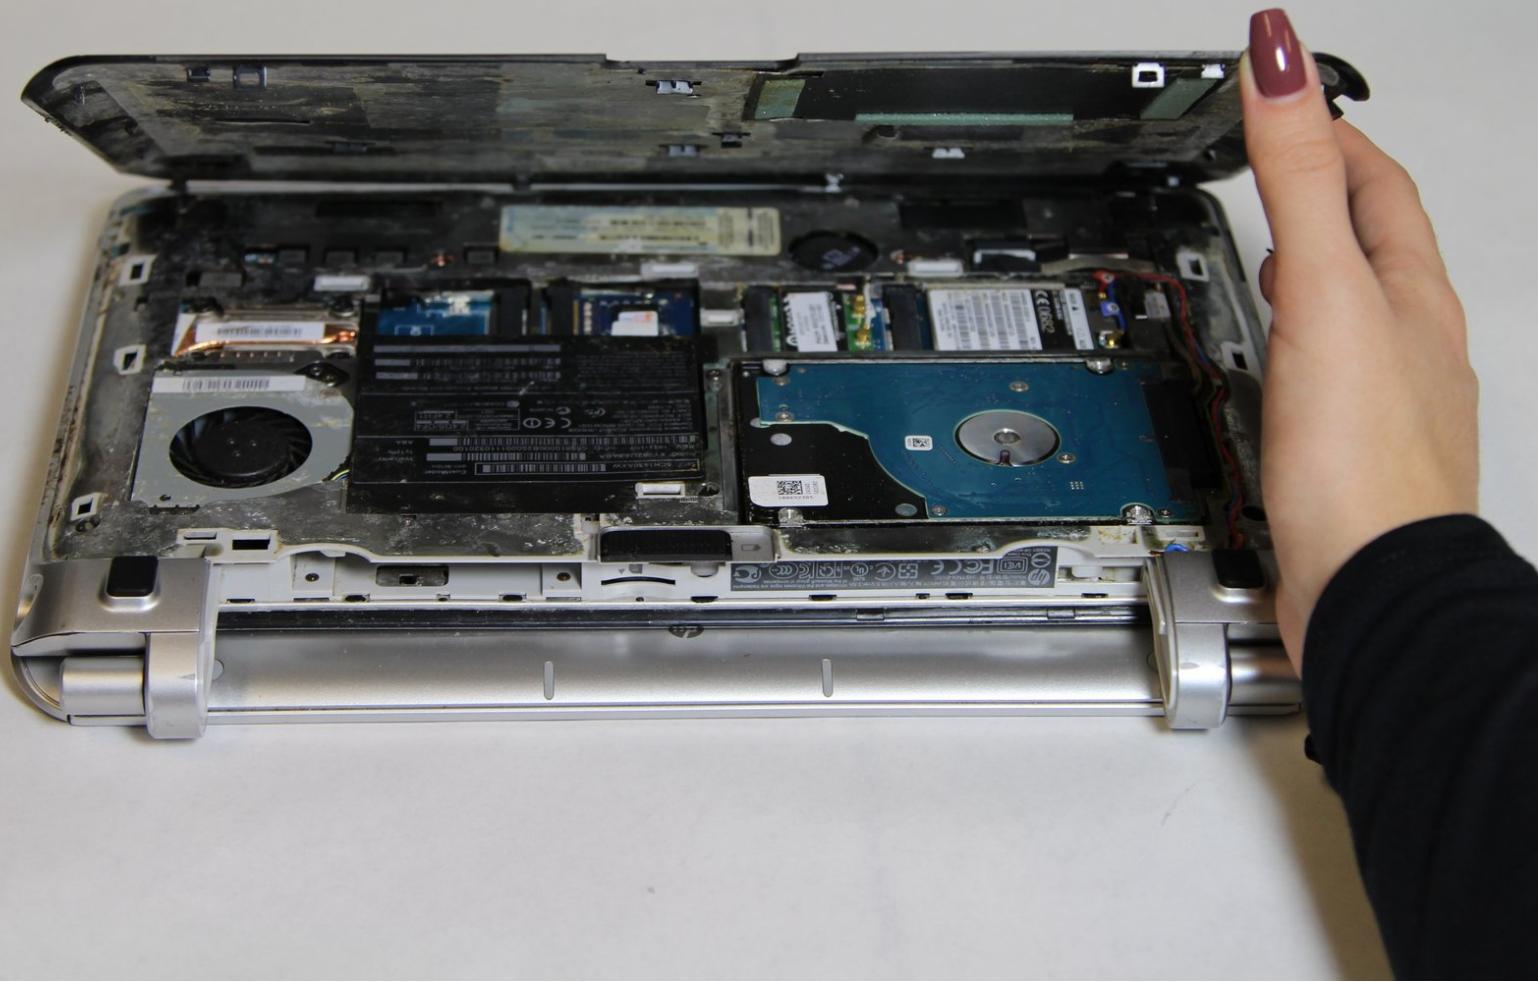

## INTRODUCTION

If you are having difficulties with your keyboard registering input, you may want to replace your keyboard.

### TOOLS:

- [iFixit Opening Tools](#) (1)
- [Phillips #0 Screwdriver](#) (1)
- [Spudger](#) (1)

## Step 1 — Battery




- Flip the device over, so that the bottom cover is exposed.
- Slide the black locking mechanism into its unlock position.

## Step 2





- After unlocking the mechanism, slide the battery out of its compartment.

## Step 3 — Keyboard

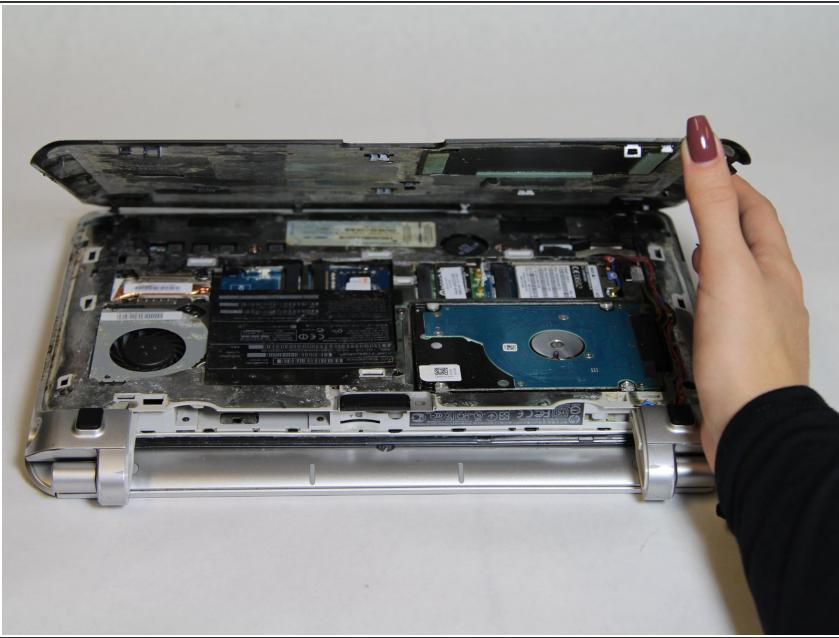

- Remove the black bottom cover by using your fingernails or a thin flat tool.

## Step 4

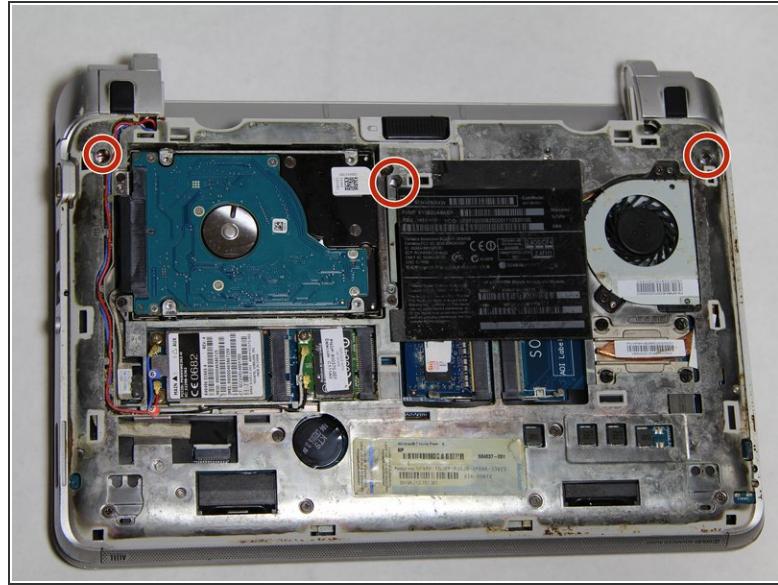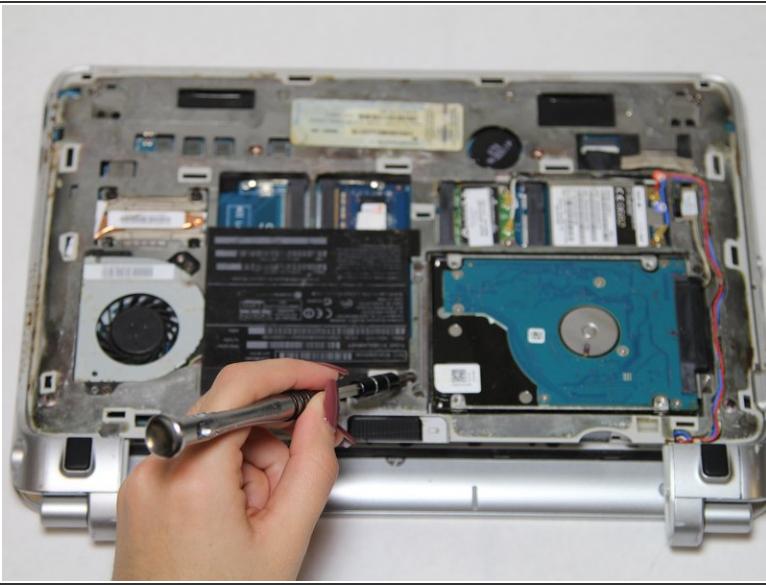



- Use the Phillips #0 screwdriver to remove three 5mm screws securing the keyboard.
- The screws to be removed are circled in red in the picture provided.
- Make sure to place the screws somewhere safe like on top of a magnet.

## Step 5



- Flip the laptop so that the keyboard is facing you.
- Use a thin and flat metal to carefully lift up the top side of the keyboard and separate it from the top cover.

## Step 6

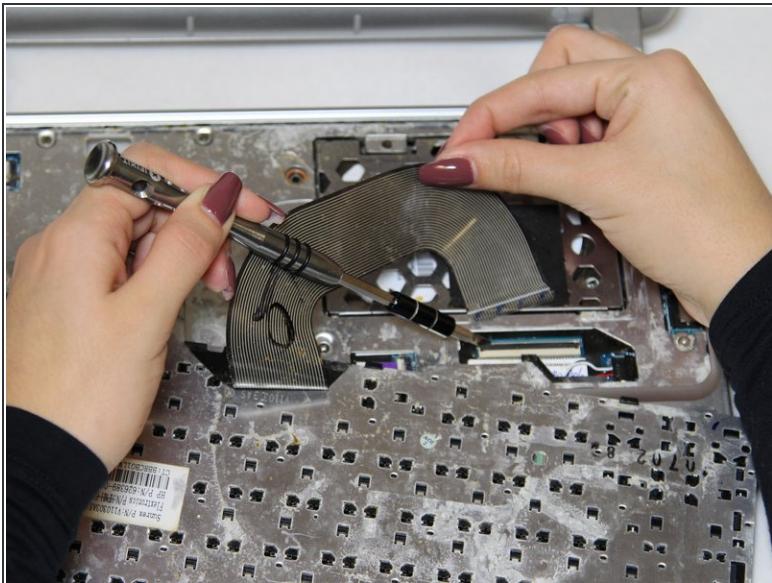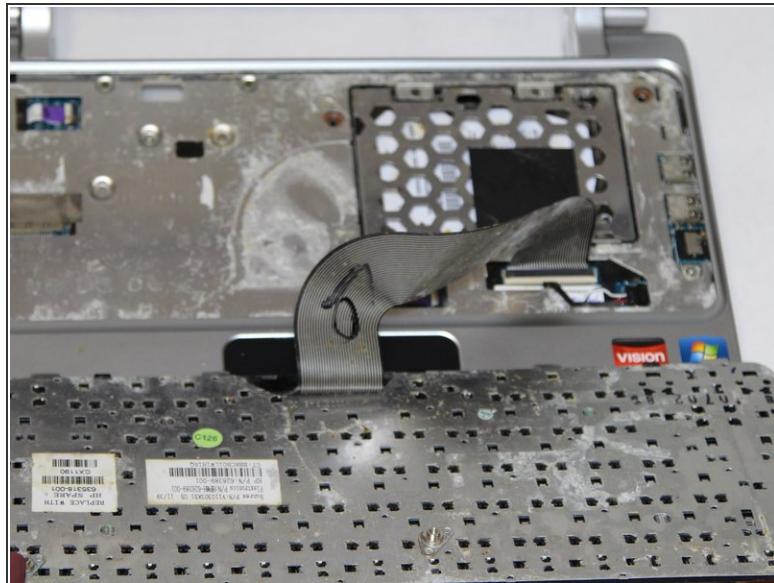

- Now you will see the keyboard cable connector attached to a locking tab.
- Lift up the locking tab with a thin and flat screwdriver or your fingernail.
- The locking tab will open up at a 90 degree angle.
- Pull the keyboard cable from the connector.

To reassemble your device, follow these instructions in reverse order.