




# HP ProBook 440 G1 Keyboard Replacement

Written By: Ethan A Courtney

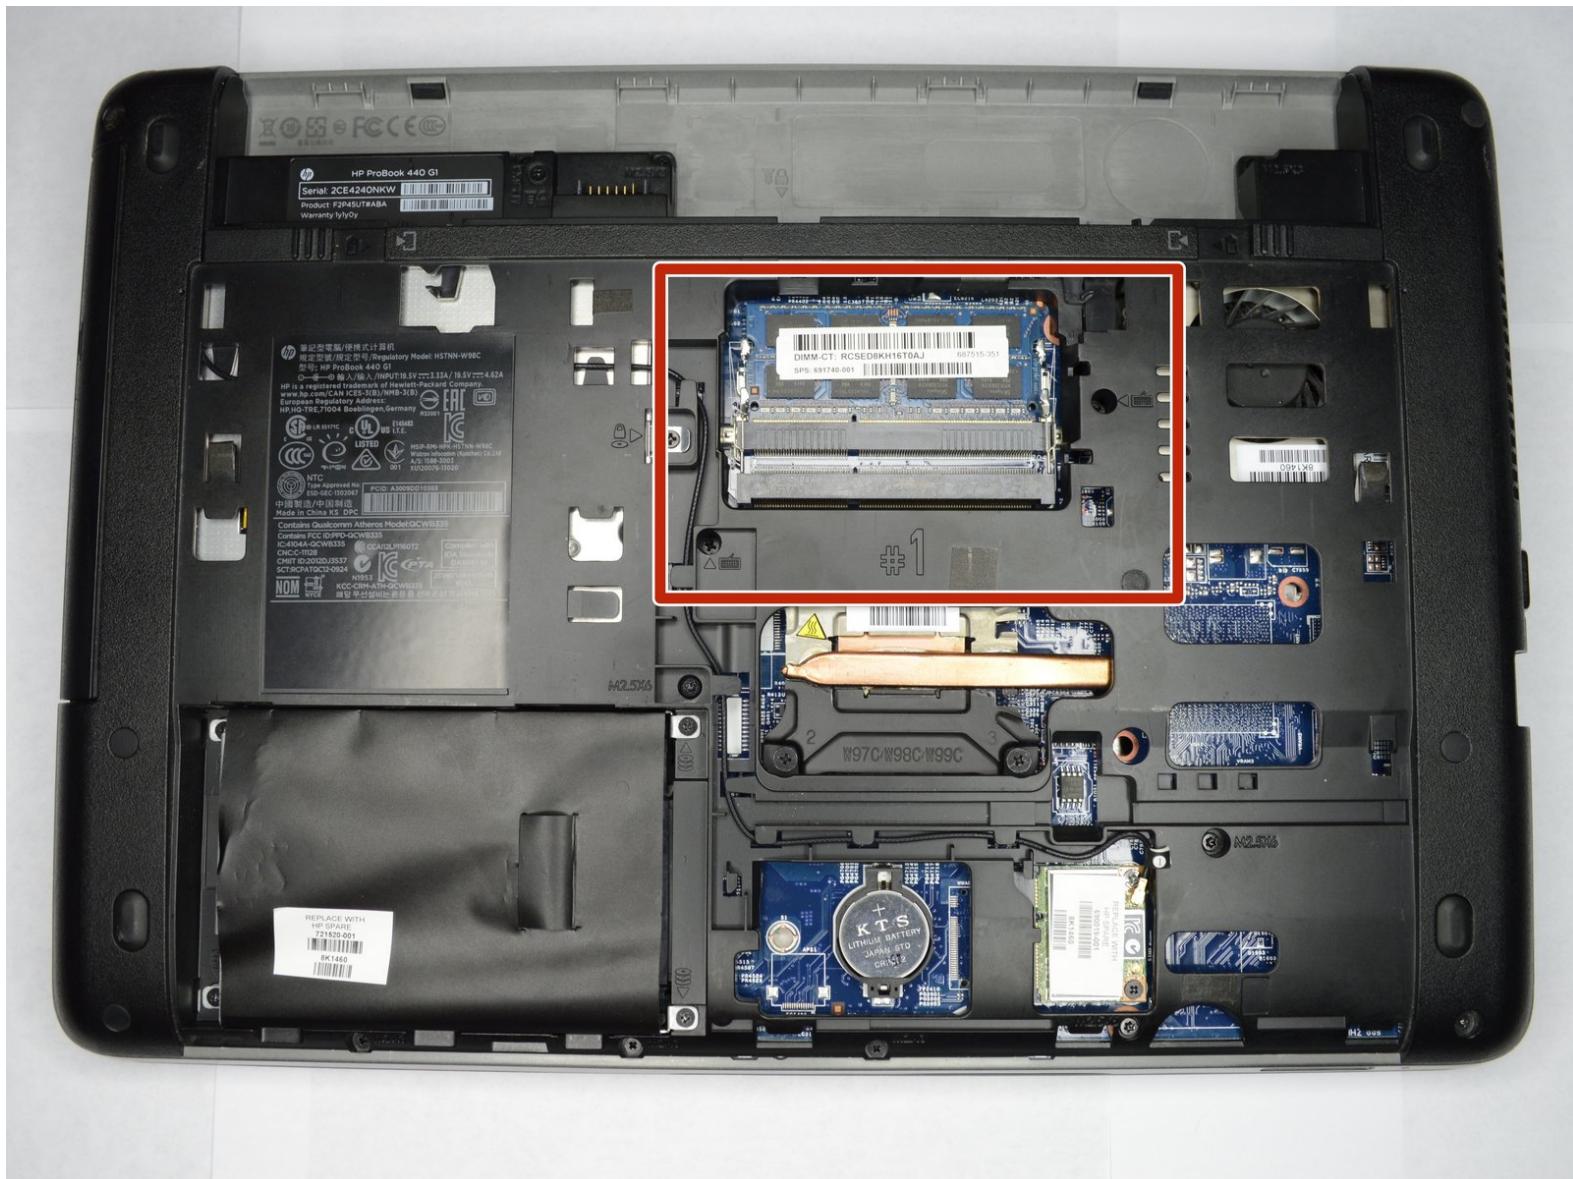

## INTRODUCTION

How to remove and replace the keyboard of an HP ProBook 440 G1.

### TOOLS:

- [Phillips #00 Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)

## Step 1 — Battery



 Make sure the laptop is turned off before you start.


- Push and hold the release tab on the right and left toward the center.

## Step 2




- Pull the battery out.

## Step 3 — Backplate

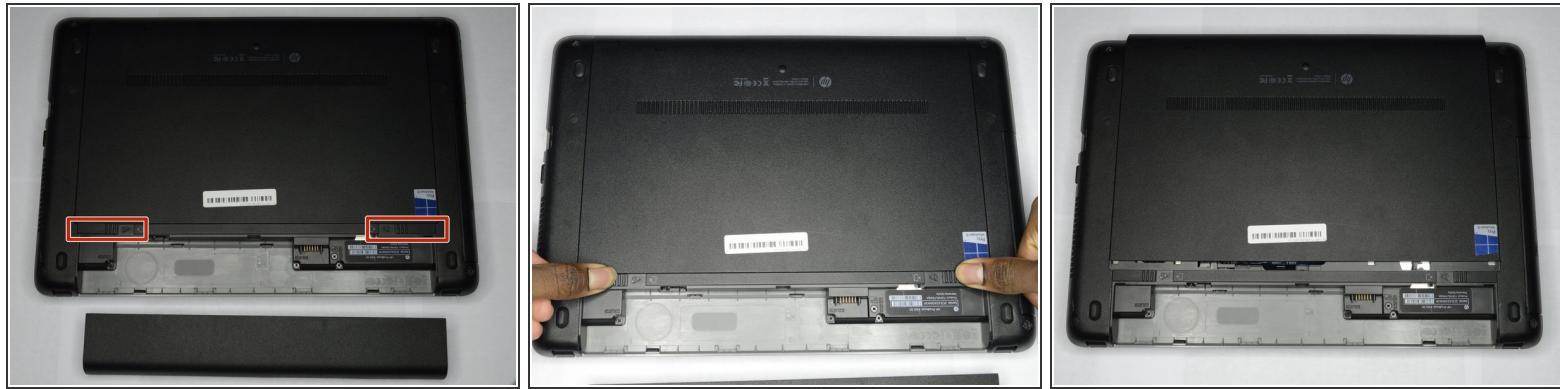


- Push and hold the release tabs on the right and left toward the center again.

## Step 4

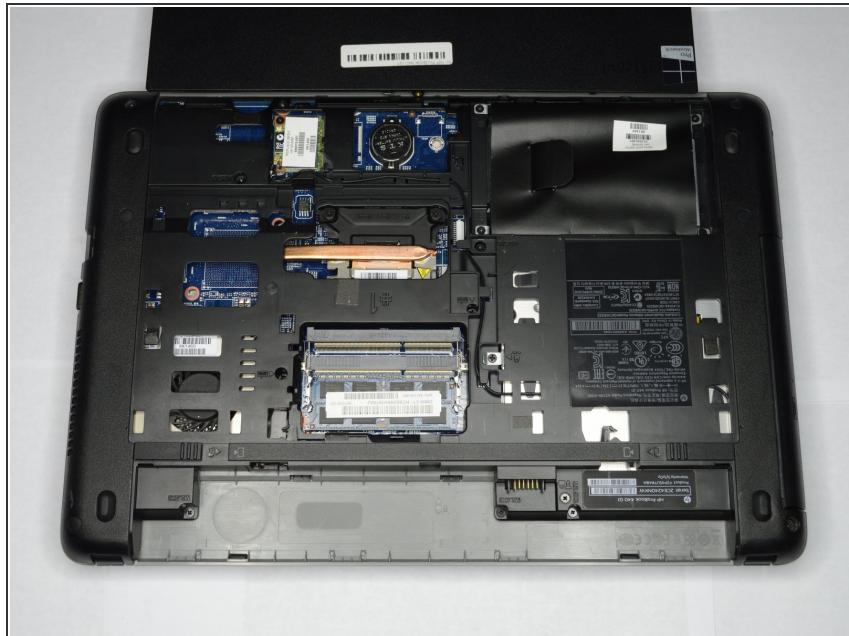

- Slide the backplate off.

## Step 5 — Keyboard

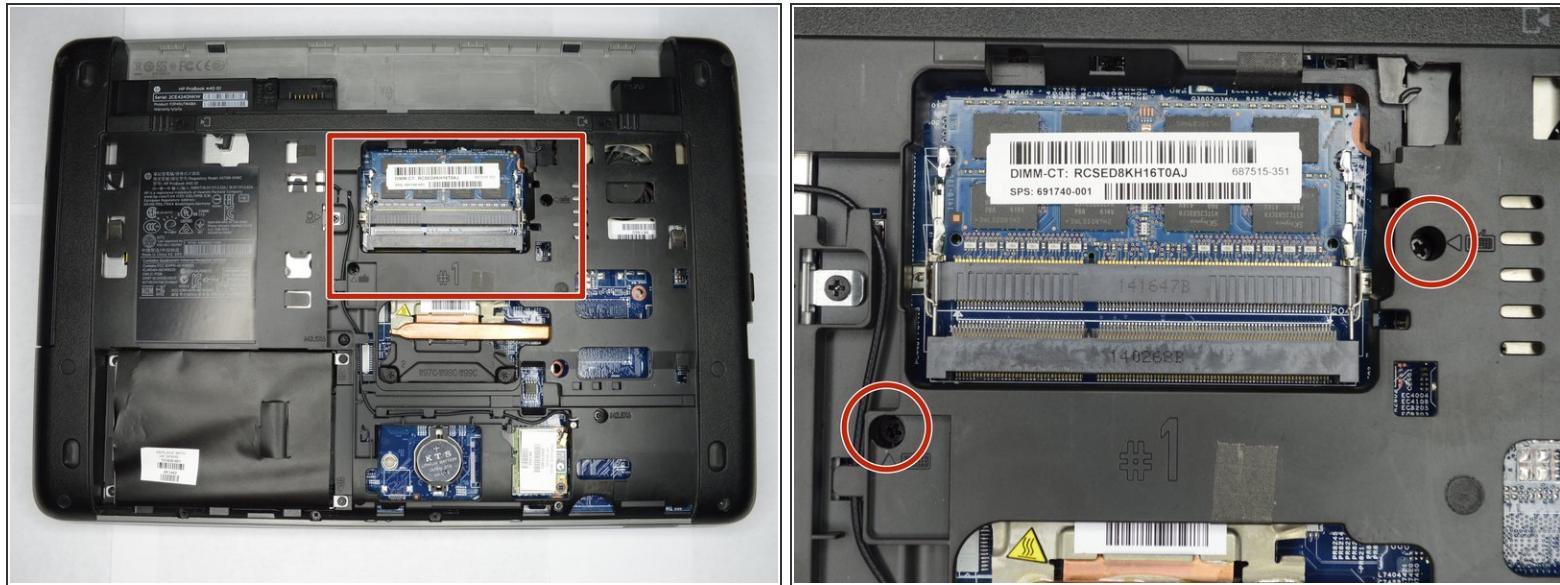


- Locate the two screws on the back of the laptop, holding the keyboard.
- Remove the two screws using a Phillips #00 screwdriver.

## Step 6



- Flip the computer over so as to see the keyboard.


## Step 7

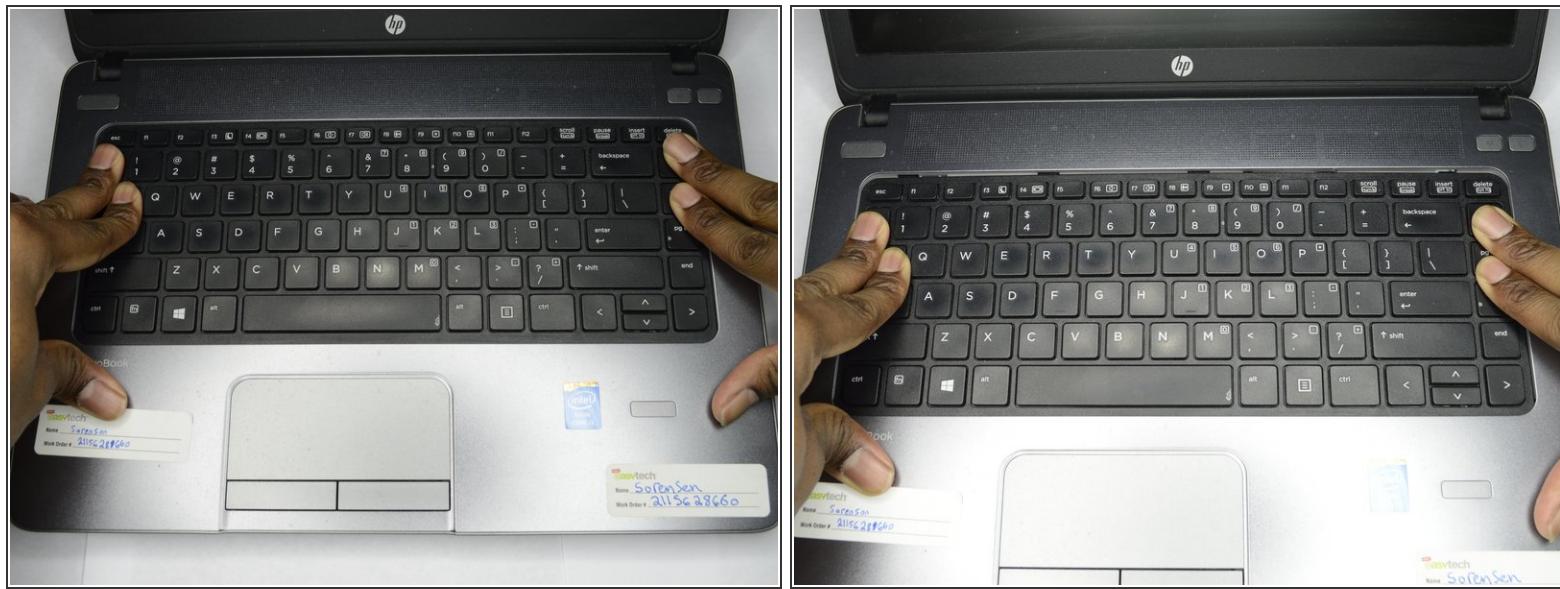

- Place both hands on the keyboard and slide it back.

*(i)* The keyboard will only slide back a small amount.

## Step 8

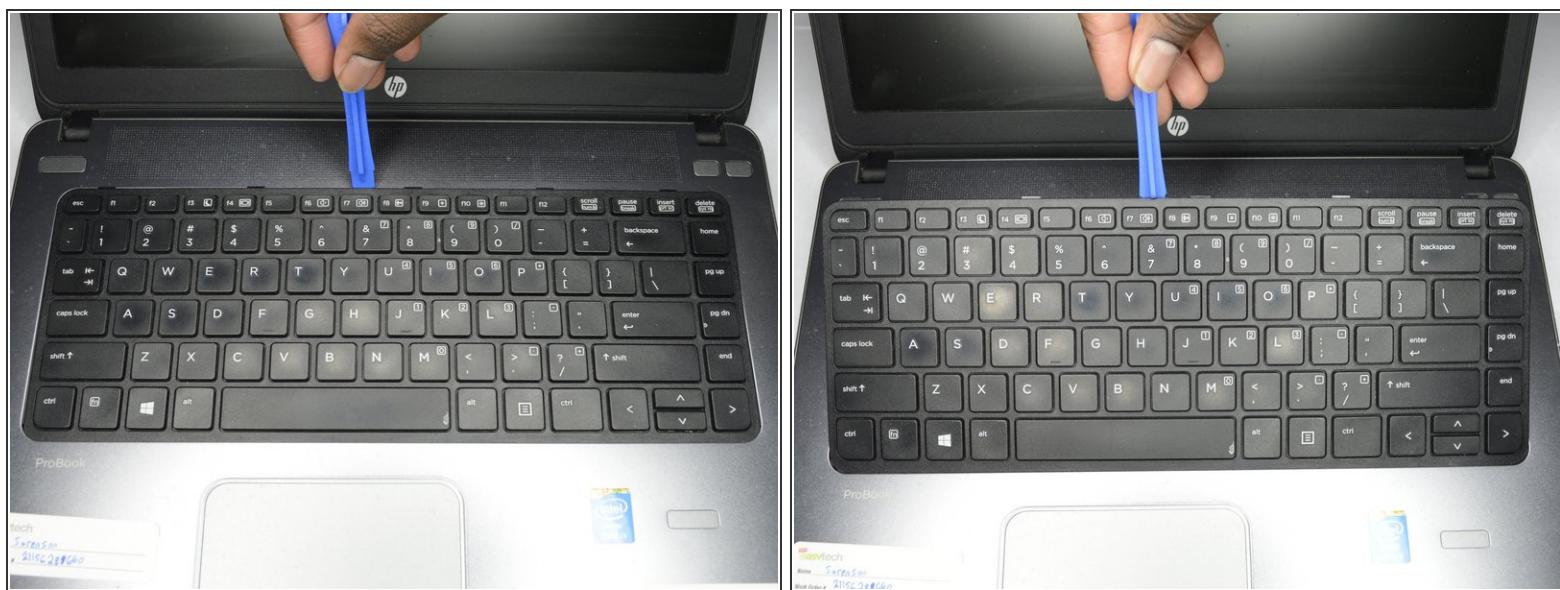

- Using a plastic opening tool, pull the keyboard up.

## Step 9



- Locate the connector strip between the keyboard and the laptop.
- Pull the strip away from the connector until it unplugs.

**(i)** It may take some force to make the strip disconnect.

To reassemble your device, follow these instructions in reverse order.