



HP Spectre 13 4003dx x360 Battery Replacement

This guide will show you how to effectively and safely remove and replace your old and non-functional battery with a new one.

Written By: Alie Antar




INTRODUCTION

This guide will give you step-by-step instructions on how to remove your battery. Make sure you have a clean, dry, uncluttered, and roomy work space that has good lighting before you start. Also, make sure that your battery actually needs to be replaced by consulting our [troubleshooting guide](#).

TOOLS:

- [Anti-Static Wrist Strap \(1\)](#)
- [Phillips #00 Screwdriver \(1\)](#)
- [Magnetic Project Mat \(1\)](#)

Step 1 — Battery

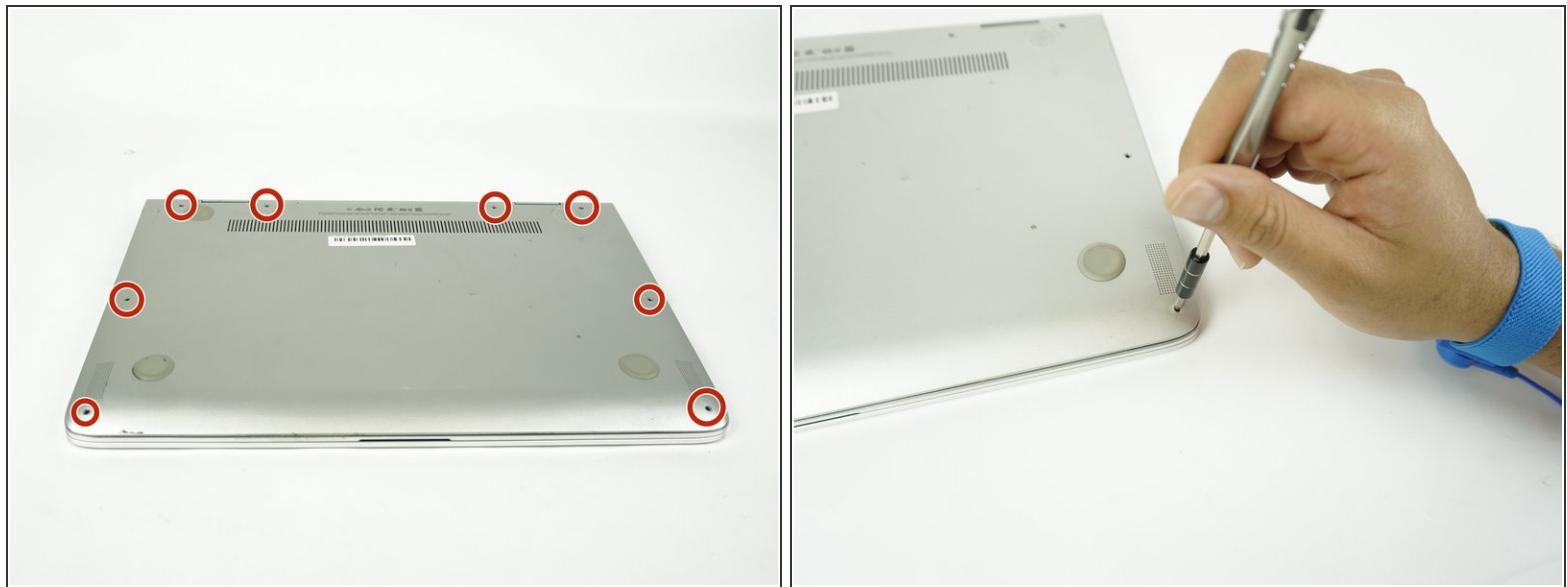

⚠ Static buildup and discharge can damage your computer's components. Use the Ant-Static Wrist strap to help prevent this.

- Turn the computer upside down.
- Use the T4 Torx Screwdriver to remove the eight 3.3 mm screws.


⚠ Make sure to use the Magnetic Project Mat to help you keep track of the small screws.

Step 2



- Remove the back case by using a plastic opening tool.

Step 3

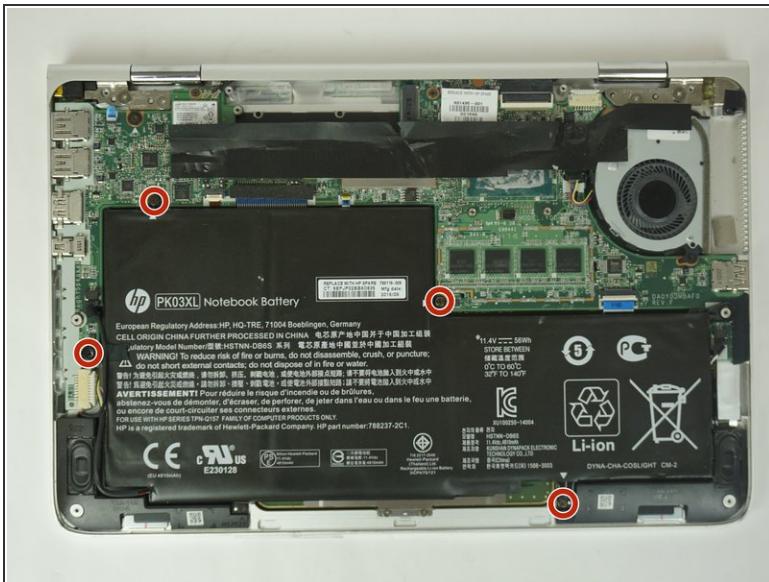

- Remove the four 2mm Phillips #00 screws from the battery.

ⓘ The screw locations are marked by small white arrows on the battery.

Step 4



- Peel off the adhesive holding the right speaker wire down.
- Move the battery slightly to gain access to the battery plug.
- Unplug then remove the battery.

i It is normal for your battery to flex and bend a bit where the wider section meets the narrower section.

! **Do not puncture the battery.** The contents are hazardous and react dangerously with the oxygen in the air.

To reassemble your device, follow these instructions in reverse order.