




HP Spectre 13 4003dx x360 Touchpad Replacement

This guide will show you how to effectively and safely remove and replace your old and non-functional touchpad with a new one.

Written By: Ethan Plumer

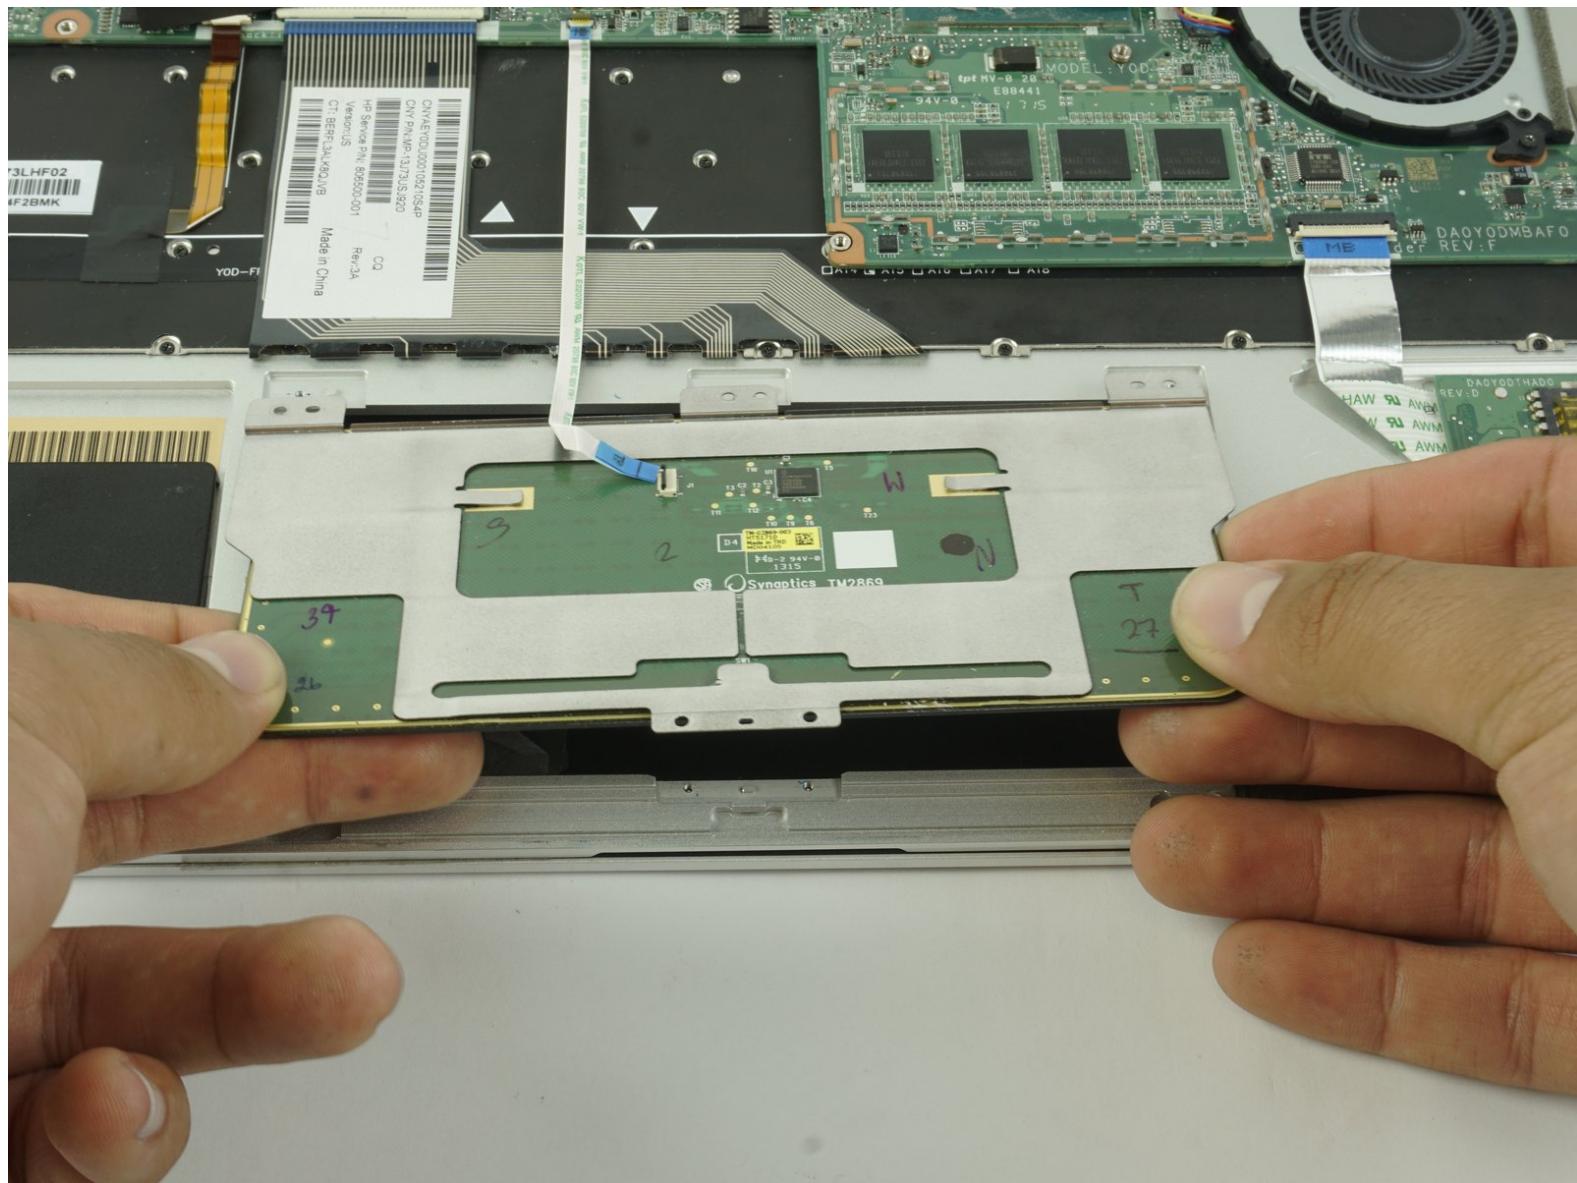

This document was generated on 2019-09-24 06:58:15 AM (MST).


INTRODUCTION

This guide will give you step-by-step instructions on how to remove your touchpad. Make sure you have a clean, dry, uncluttered, and roomy work space that has good lighting before you start. Also, make sure that your touchpad actually needs to be replaced by consulting our [troubleshooting guide](#).

TOOLS:

- [Phillips #00 Screwdriver](#) (1)
- [Magnetic Project Mat](#) (1)
- [iFixit Opening Tools](#) (1)

Step 1 — Battery

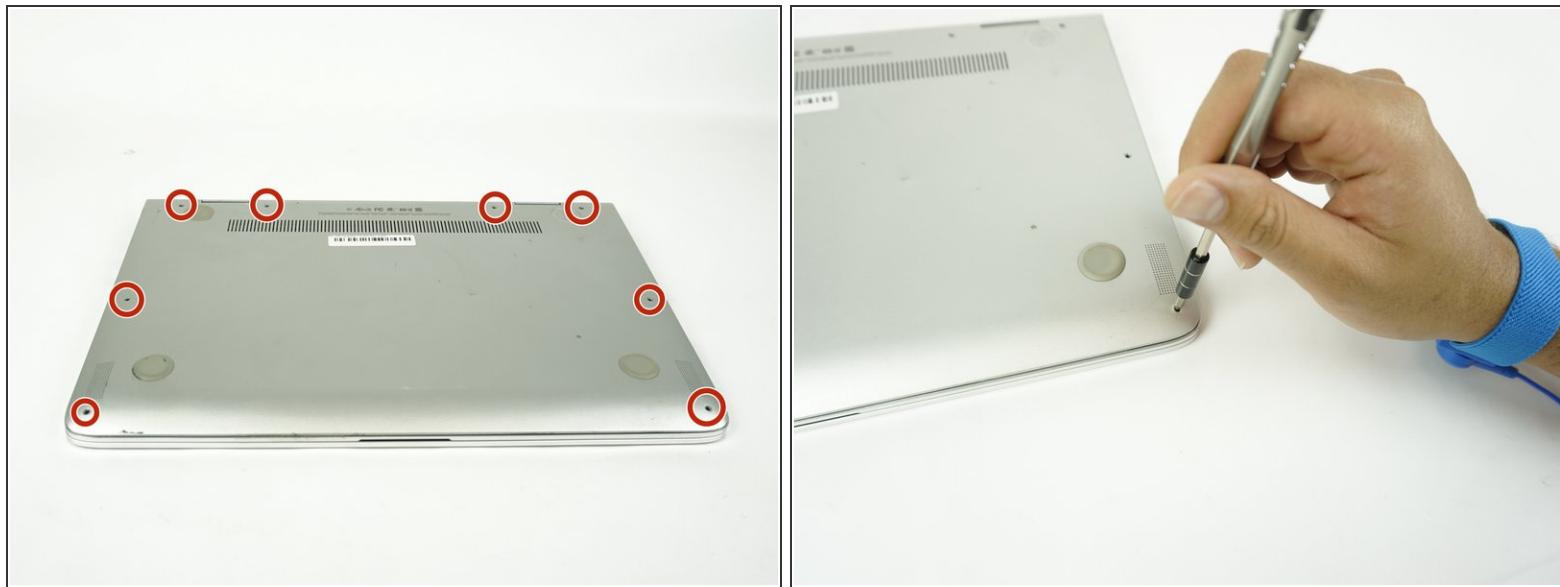

⚠ Static buildup and discharge can damage your computer's components. Use the Ant-Static Wrist strap to help prevent this.

- Turn the computer upside down.
- Use the T4 Torx Screwdriver to remove the eight 3.3 mm screws.


⚠ Make sure to use the Magnetic Project Mat to help you keep track of the small screws.

Step 2



- Remove the back case by using a plastic opening tool.

Step 3

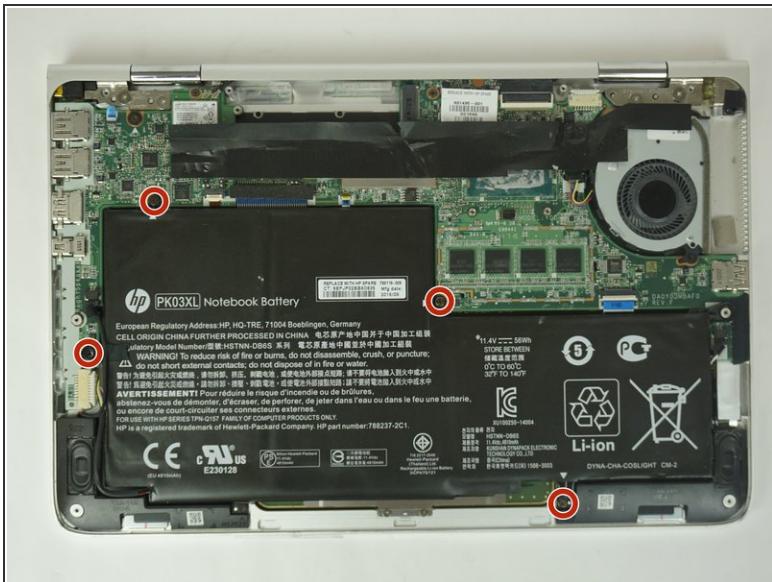

- Remove the four 2mm Phillips #00 screws from the battery.

ⓘ The screw locations are marked by small white arrows on the battery.

Step 4





- Peel off the adhesive holding the right speaker wire down.
- Move the battery slightly to gain access to the battery plug.
- Unplug then remove the battery.

(i) It is normal for your battery to flex and bend a bit where the wider section meets the narrower section.



⚠ Do not puncture the battery. The contents are hazardous and react dangerously with the oxygen in the air.

Step 5 — Touchpad

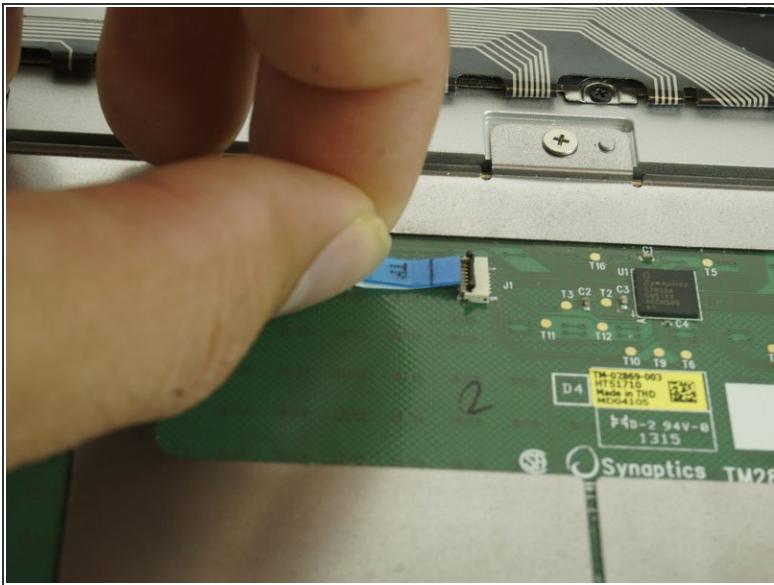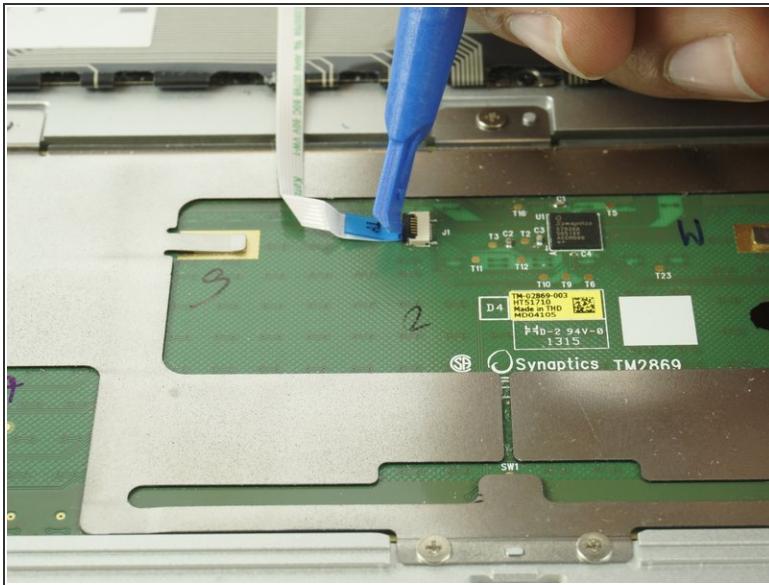


- Using a plastic opening tool, lift the locking bar on the trackpad ZIF connector.
- Gently pull the cable out.

Step 6

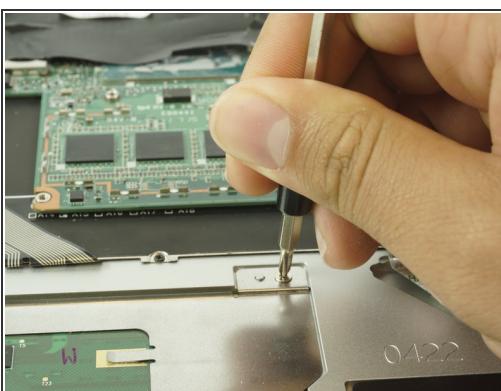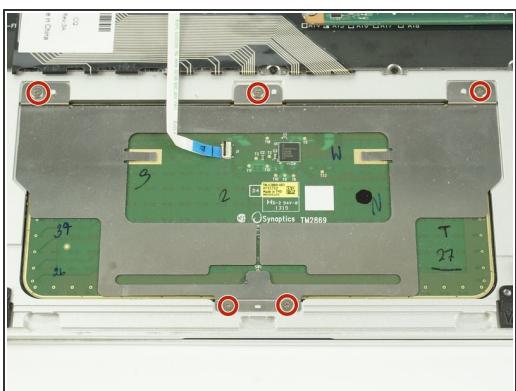

- Using the PH00 Screwdriver, remove the five 2.0 mm screws indicated in the picture.

Step 7

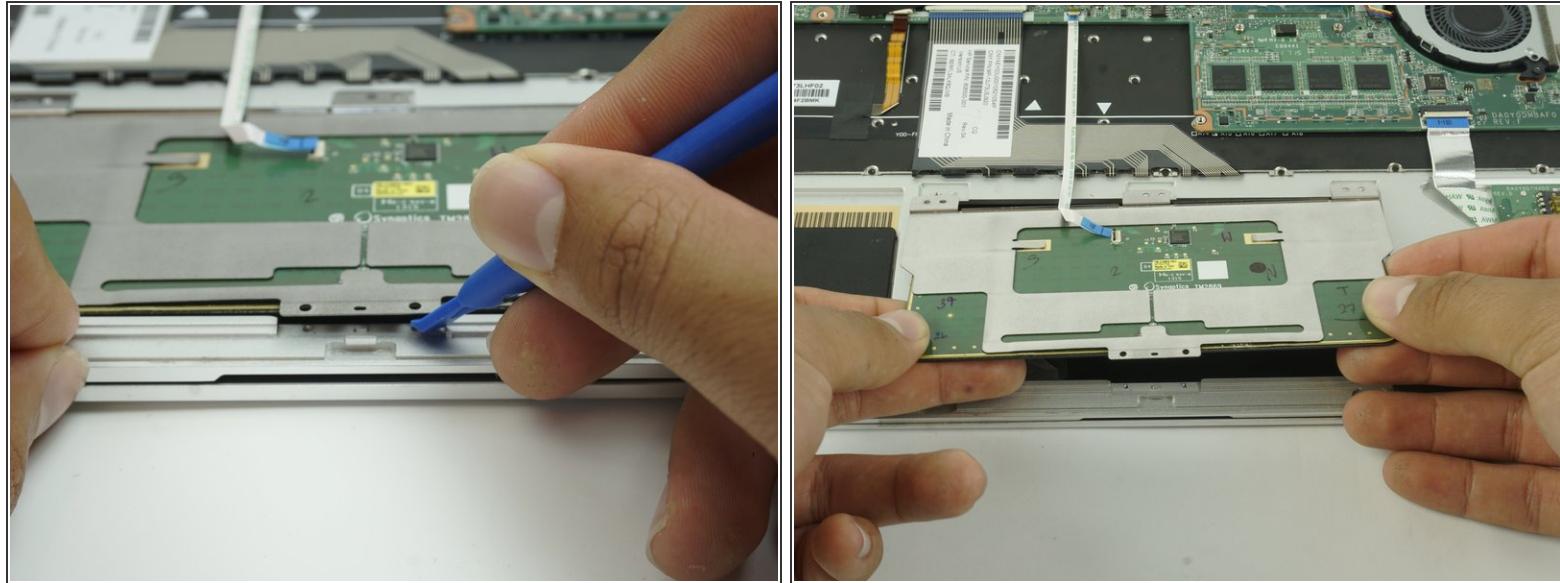

- Using a plastic opening tool, carefully lift up on the lower center metal piece of the touchpad.
- Using both hands, gently lift up on the touchpad until it is completely removed.

(i) If you are uncomfortable using the plastic opening tool, both hands can be used to remove the touchpad.

To reassemble your device, follow these instructions in reverse order.