



HP TouchSmart 15-r015dx Keyboard Replacement

This guide will show you how to replace your keyboard for your HP TouchSmart 15-r015dx.

Written By: Jacob Kleinsorge



INTRODUCTION

The HP TouchSmart 15-r015dx has a Cruus NSK-CN6SC keyboard.

TOOLS:

- [iFixit Opening Tools](#) (1)
- [Phillips #00 Screwdriver](#) (1)

Step 1 — Keyboard




- Turn off your laptop.
- ⚠ Ensure your laptop is off. Removing the keyboard while it is on may harm your laptop.
- Flip upside down in order to release the keyboard.

Step 2



- Remove the two Phillips screws securing the keyboard.
- ⓘ One of the screws lies on/under the label.


Step 3

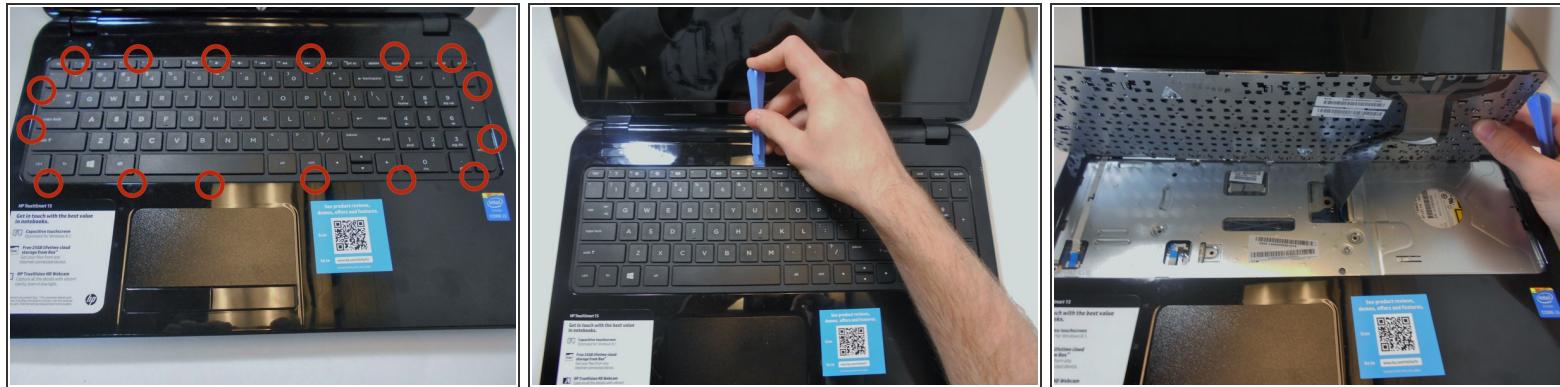

- Flip the laptop back over and pull the screen up.
- There are 16 (sixteen) latches holding the keyboard in place.
- Gently pry the keyboard up using your plastic opening tool.

⚠ Don't pull the keyboard up more than 2-3 inches as there is a film-material connecting the keyboard to the laptop.

Step 4

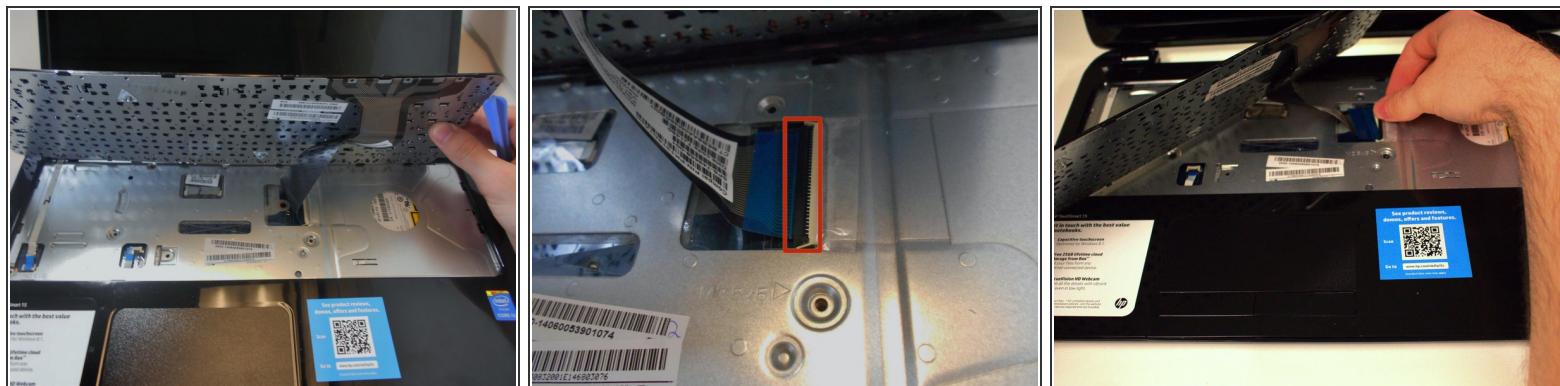

- There is a film-material connecting the laptop to the keyboard.
- There is a small black latch holding the film-material in place.
- Flip the black latch up to release the film-material.
- Once flipped up, simply pull the film-material out from the laptop to release the keyboard.

To reassemble your device, follow these instructions in reverse order.