




HP8 1401 Speakers Replacement

In this guide, you will learn how to replace the speakers of your HP tablet.

Written By: Katie Presz

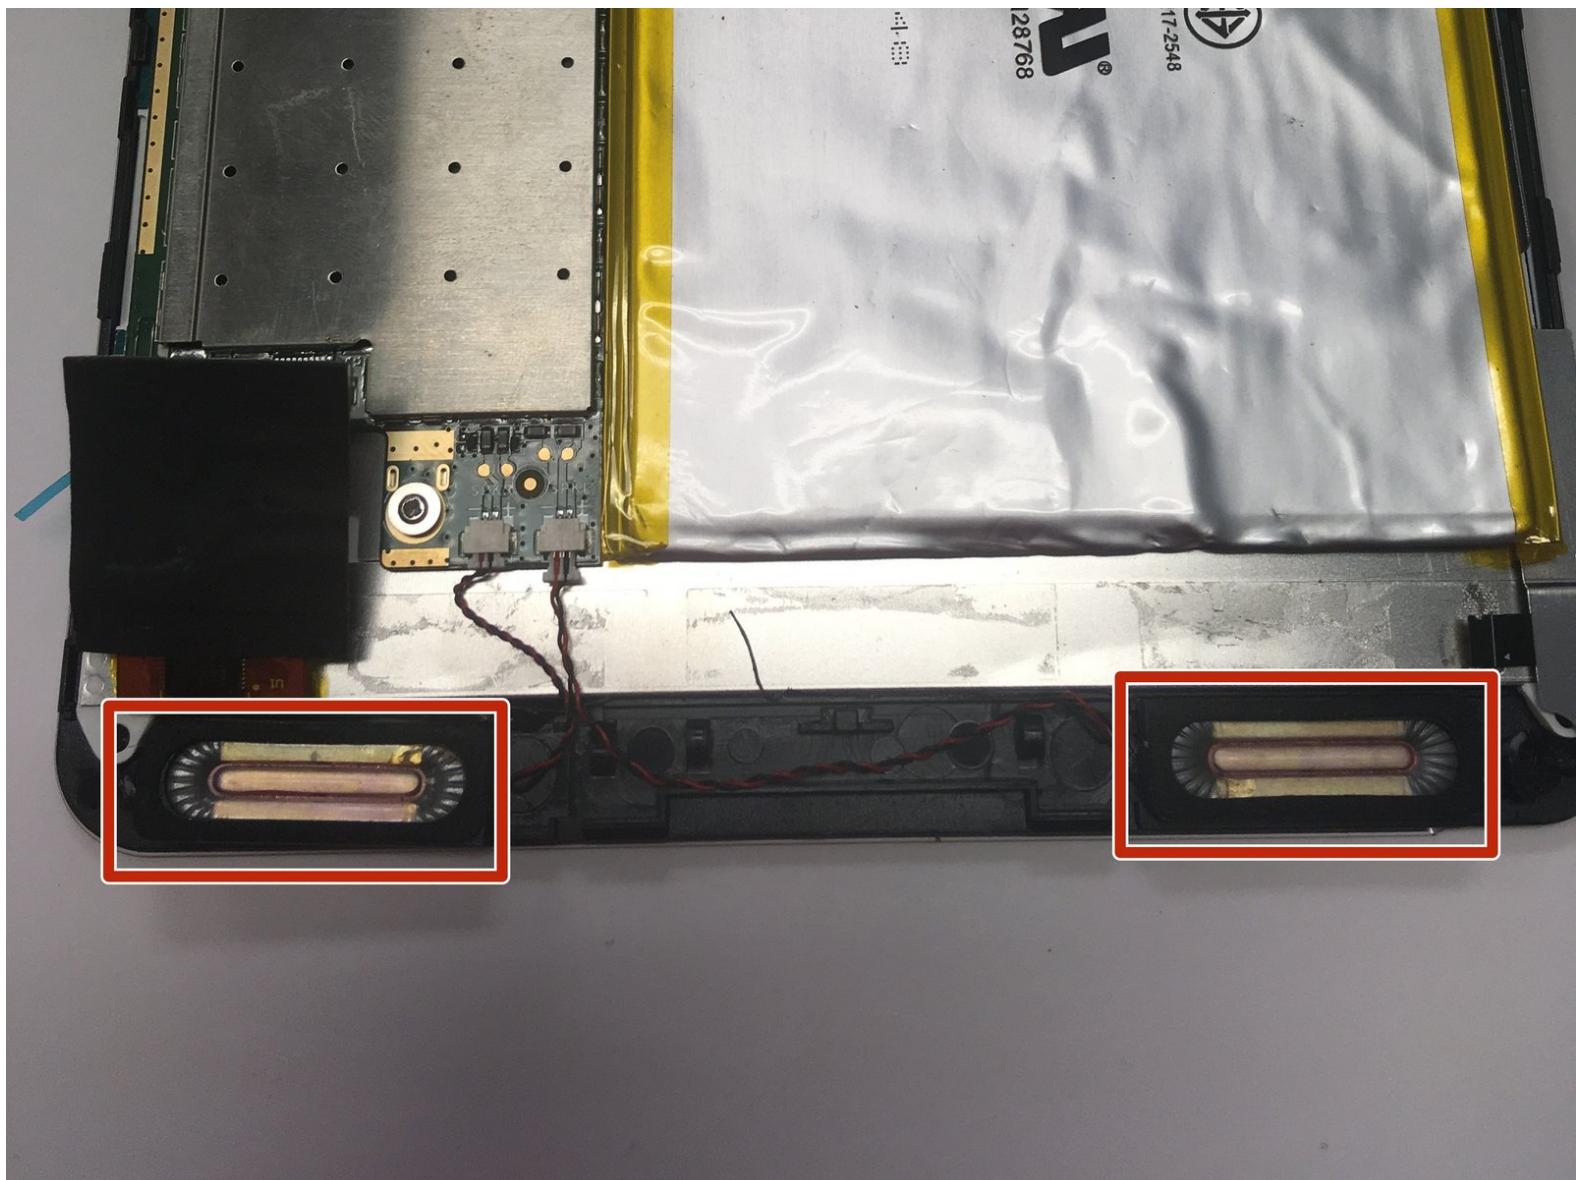

INTRODUCTION

This guide is used when the speakers are damaged or do not produce sound. You will need to use a little bit of force to remove the speakers from the tablet.

TOOLS:

- [iFixit Opening Tools](#) (1)
- [T4 Torx Screwdriver](#) (1)
- [Tweezers](#) (1)
- [Spudger](#) (1)

Step 1 — Back Panel




- Using a Torx T4 screwdriver, remove the four 5 mm screws on the back panel.

Step 2




- Insert the tip of a plastic opening tool in the seam between the front and back panels.

Step 3

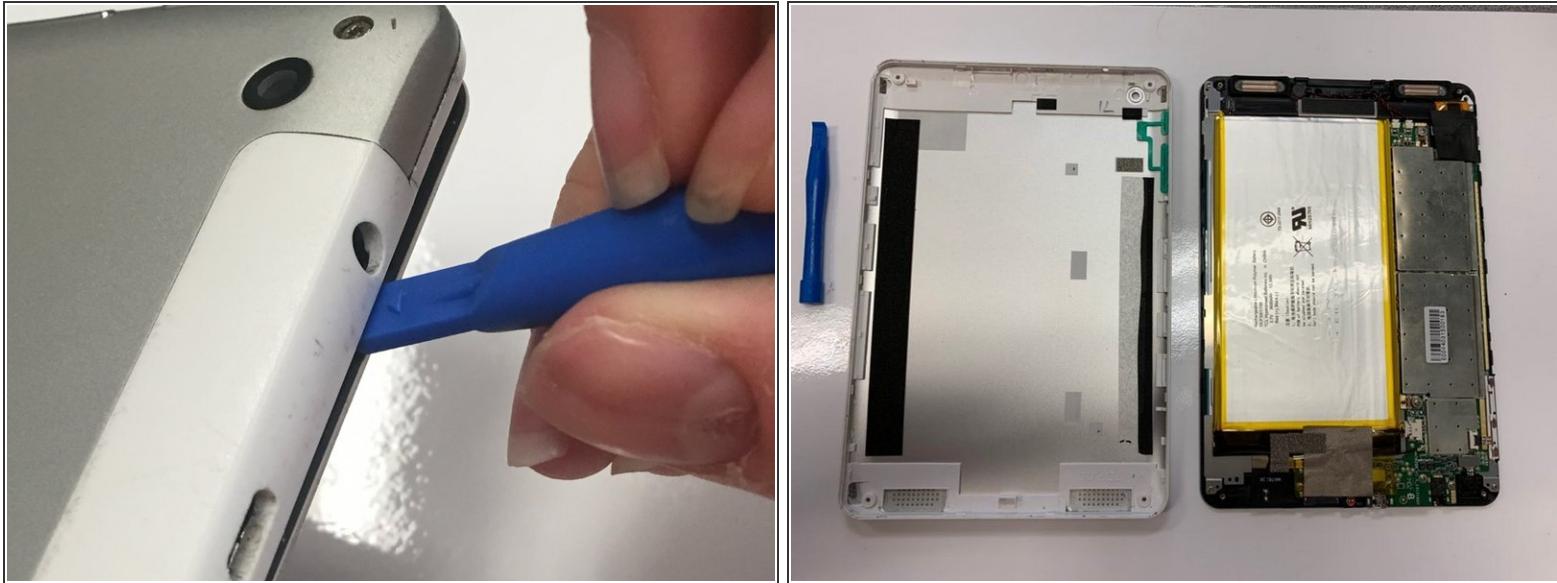


- Slide the plastic opening tool around all edges of the device until the back panel detaches.
- Lift off the back panel.

Step 4 — Speakers

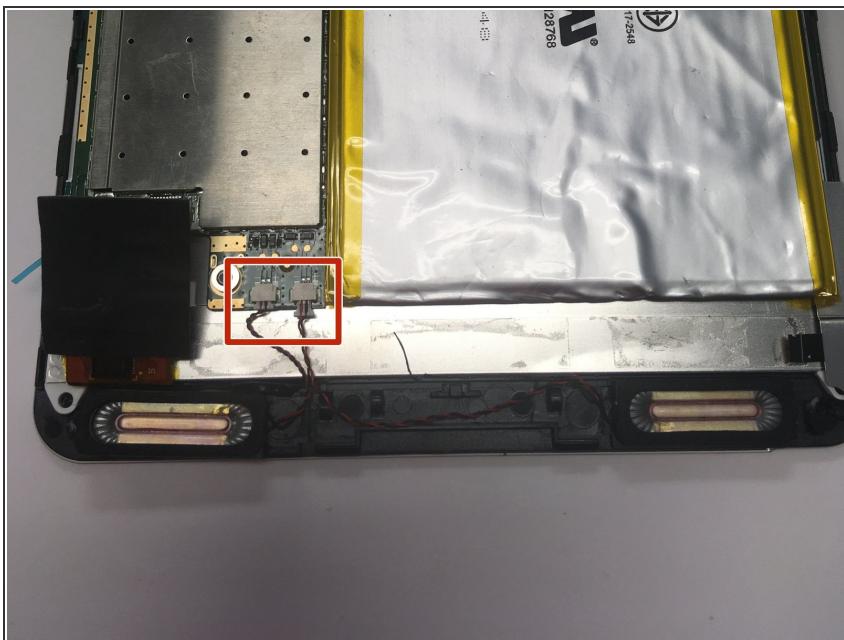

- Using tweezers or your fingers, disconnect the two speaker cables by pulling them free of the socket connectors.

Step 5

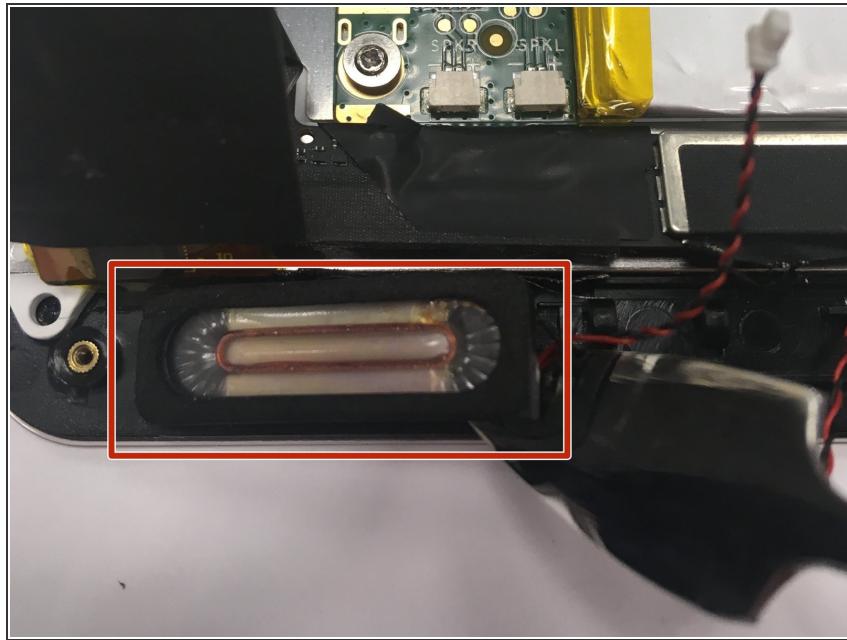

- Use a spudger to pry the speakers up and out of the case.

Step 6



- After removing the speakers they should look like this.

To reassemble your device, follow these instructions in reverse order.