



HTC 7 Surround Camera Replacement

How to replace an HTC Surround camera.


Written By: Michael Ronning



 **TOOLS:**

- [Phillips #00 Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)

Step 1 — Back Case

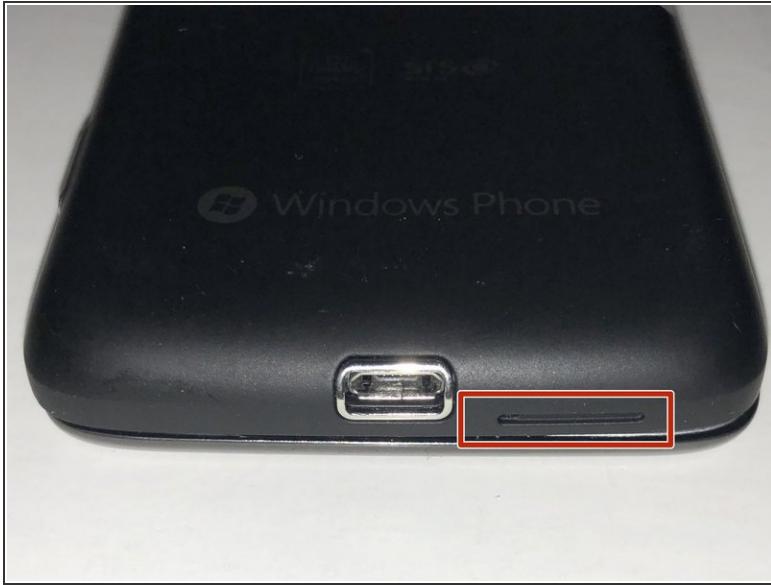

- Remove the back cover of the device to access the internal components of the HTC 7 Surround.
- To remove the back cover, use the circular hole to lift up the cover while holding the front of the device down.

Step 2




- Using a Phillips #00 screwdriver, remove the screws as directed.

Step 3



- Separate the screen and back cover with the opening tool.

Step 4 — Rear Camera

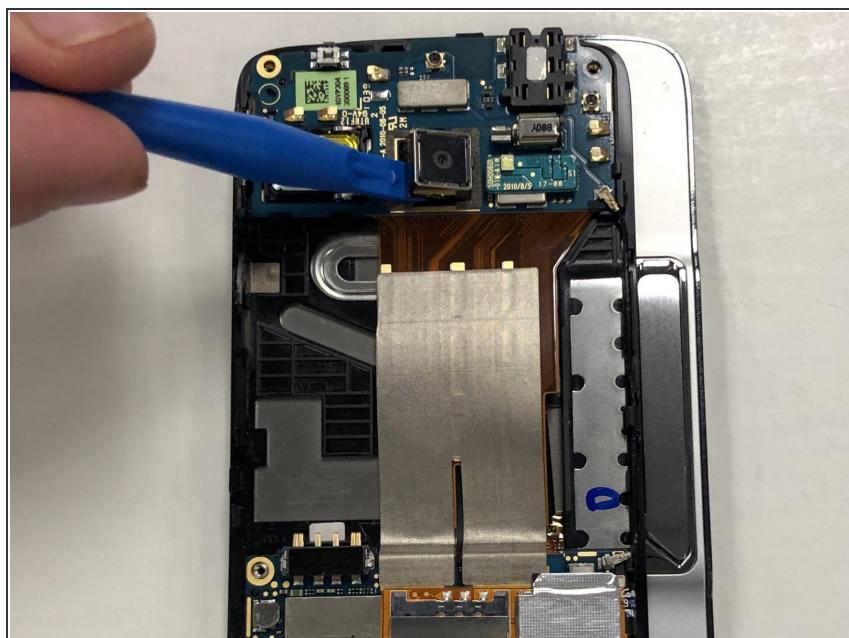

- The camera is attached to the device by a sticky double-sided piece of tape. Insert the plastic

opening tool under each side of the camera until it is removed from the tape.

- The camera lens should then come off after enough force is applied, and room will be made for the replacement to be inserted.

To reassemble your device, follow these instructions in reverse order.