




HTC Amaze Back Panel Disassembly

Prerequisite Only: A guide showing how to remove the back panel of the HTC Amaze.

Written By: Jonah DIngle

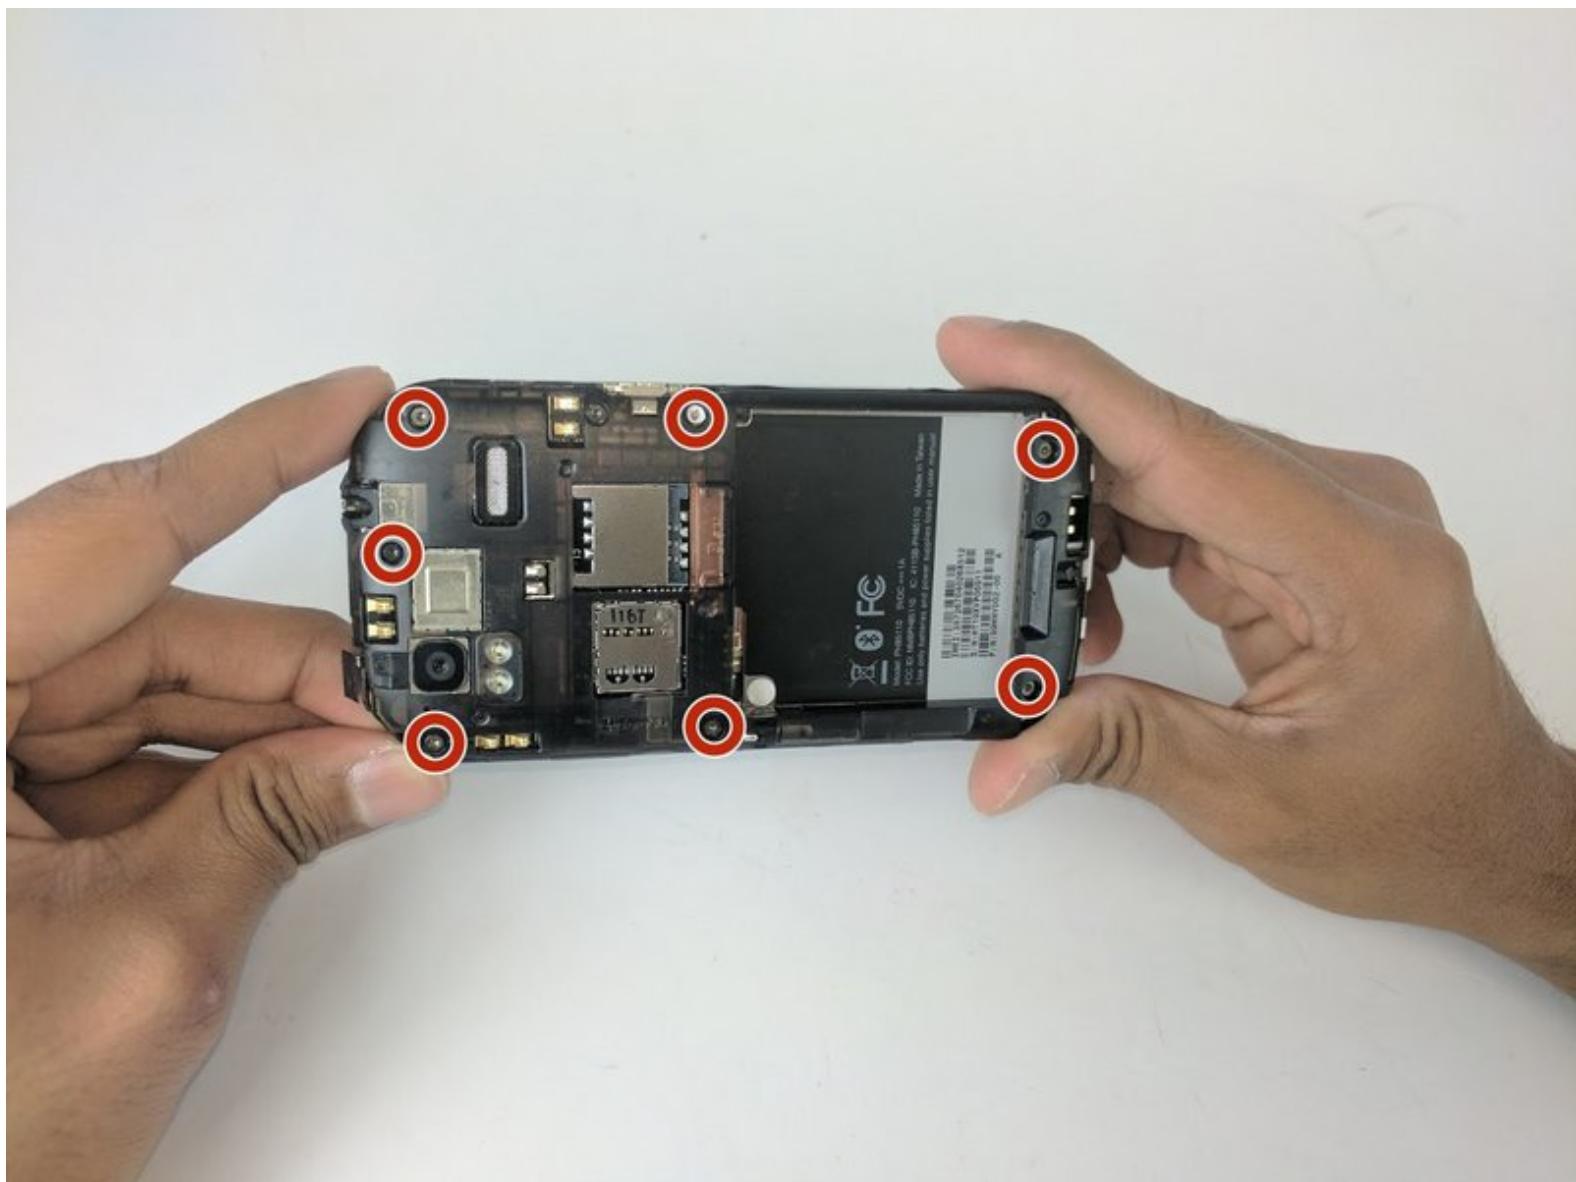

INTRODUCTION


Prerequisite Only

This guide will show how to remove the back panel of the HTC Amaze, which will then make it easier to access other components of the device.

TOOLS:

- [T5 Torx Screwdriver](#) (1)
- [Metal Spudger](#) (1)
- [Phillips #000 Screwdriver](#) (1)

Step 1 — Battery

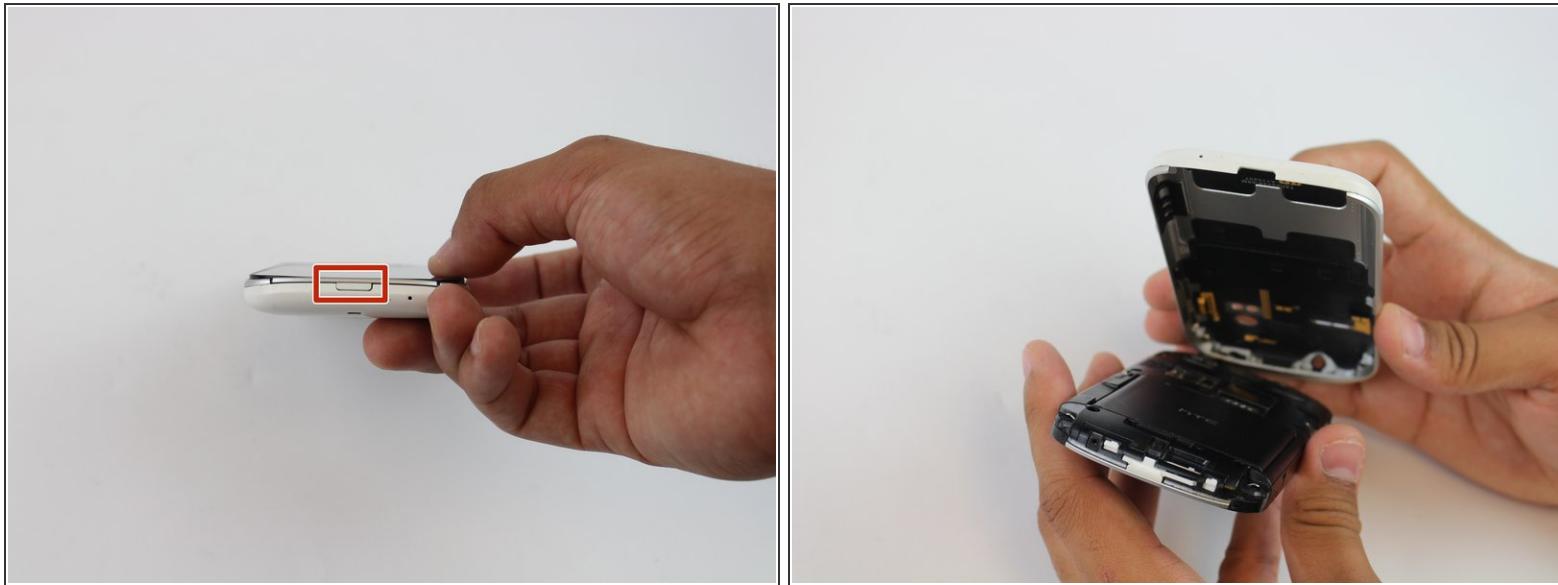


- Gently press the Release Button located at the bottom of the phone in order to remove the back panel of the device.

Step 2




- Once you locate the battery, look for a notch below it.
- Gently insert your fingernails into the notch.
- Lift the battery out of its recess.

Step 3 — HTC Amaze Back Panel Disassembly

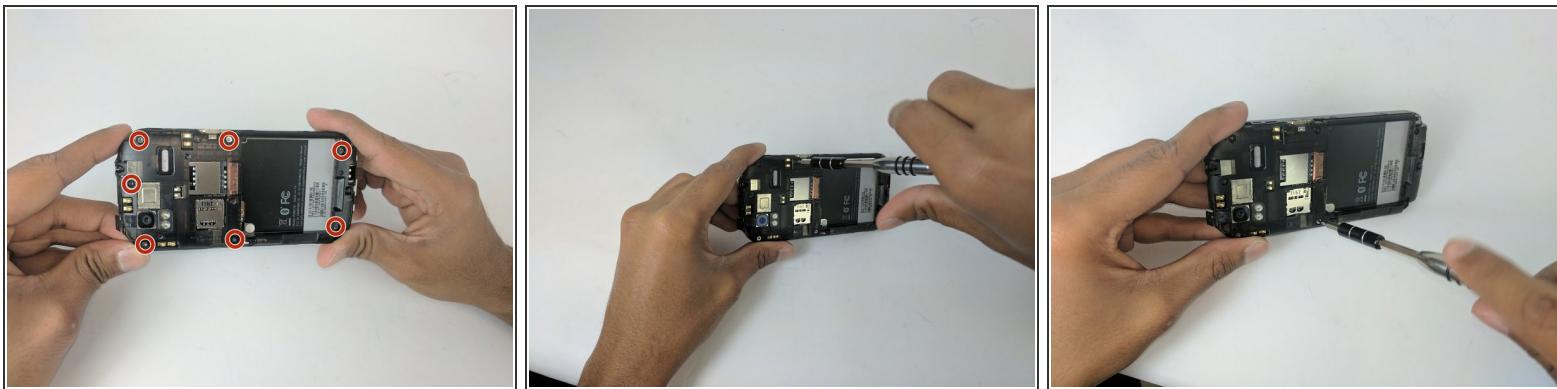


- Use the Torx T5 screwdriver to remove the 7 Torx Screws (3mm) attached to the back housing of the device.
- One of the Screws may have a tape attached to it that says void. Removing this screw will void the devices warranty.

Step 4

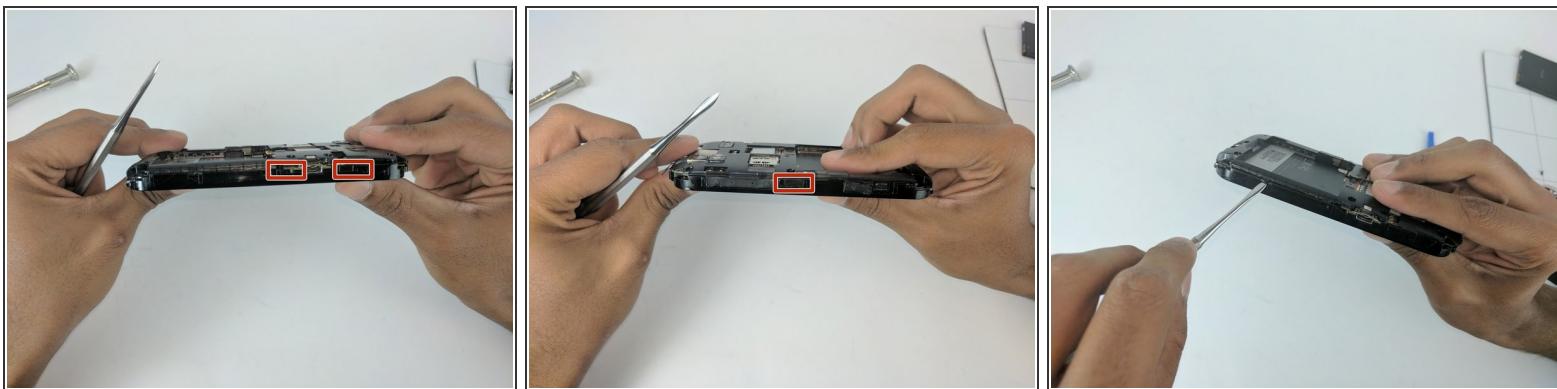

- Proceed to remove the back housing by using the spudger to gently unclip each clip holding the back housing in place and then lift the outer edges of the back housing
- If you're having trouble opening the back try using the spudger to gently pry all around the panel before you attempt to remove it.

Step 5

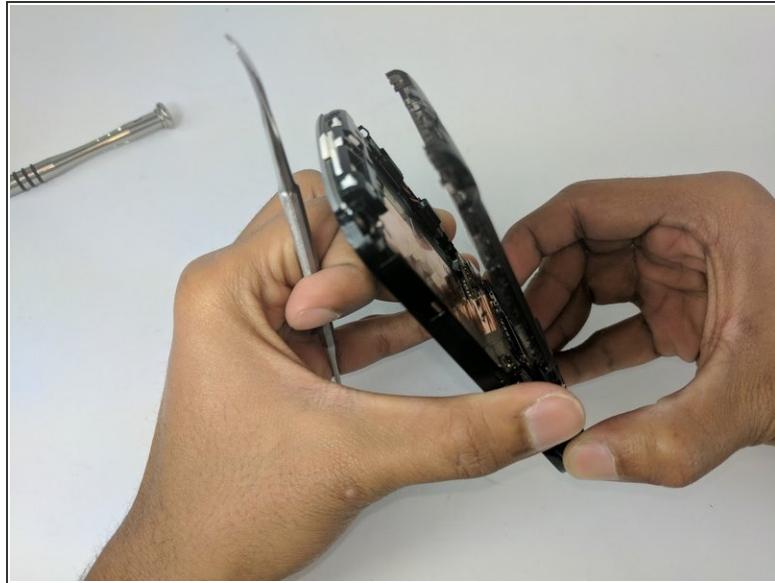

- Now simply remove the back panel by gently pulling. This will make it easier to access the devices internal components.

To reassemble your device, follow these instructions in reverse order.