



# HTC Desire 626s Backplate Replacement

How to remove the back plate of the HTC Desire 626s without damaging the plastic in any way.

Written By: Blake Bartlett



## INTRODUCTION

This guide will walk you through the removal of the back plate on your HTC Desire 626s. This will be needed for replacement of any other parts within the phone such as the battery, speaker etc.

### TOOLS:


- [iFixit Opening Tools](#) (1)
- [T5 Torx Screwdriver](#) (1)
- [JIS #000 Screwdriver](#) (1)

## Step 1 — Backplate




- Insert plastic opening tool in between the back cover and grey plastic.
- Gently work your way around the phone while sliding the tool.
- Gently pry on plastic cover as needed to release fasteners.

## Step 2

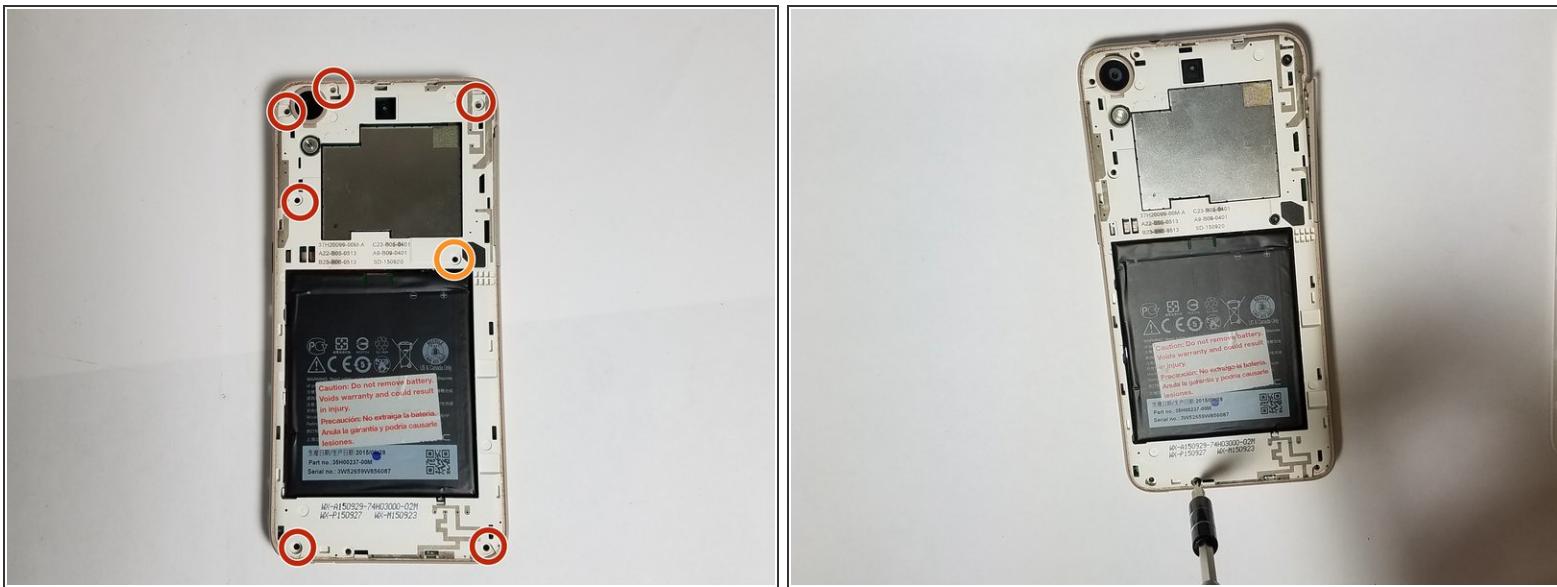

- There are 7 screws you need to remove before prying the secondary cover off. You will need to use the JIS #000 screwdriver and the T5 Torx screwdriver to remove these screws.
- There is a screw under the "void" sticker.

## Step 3

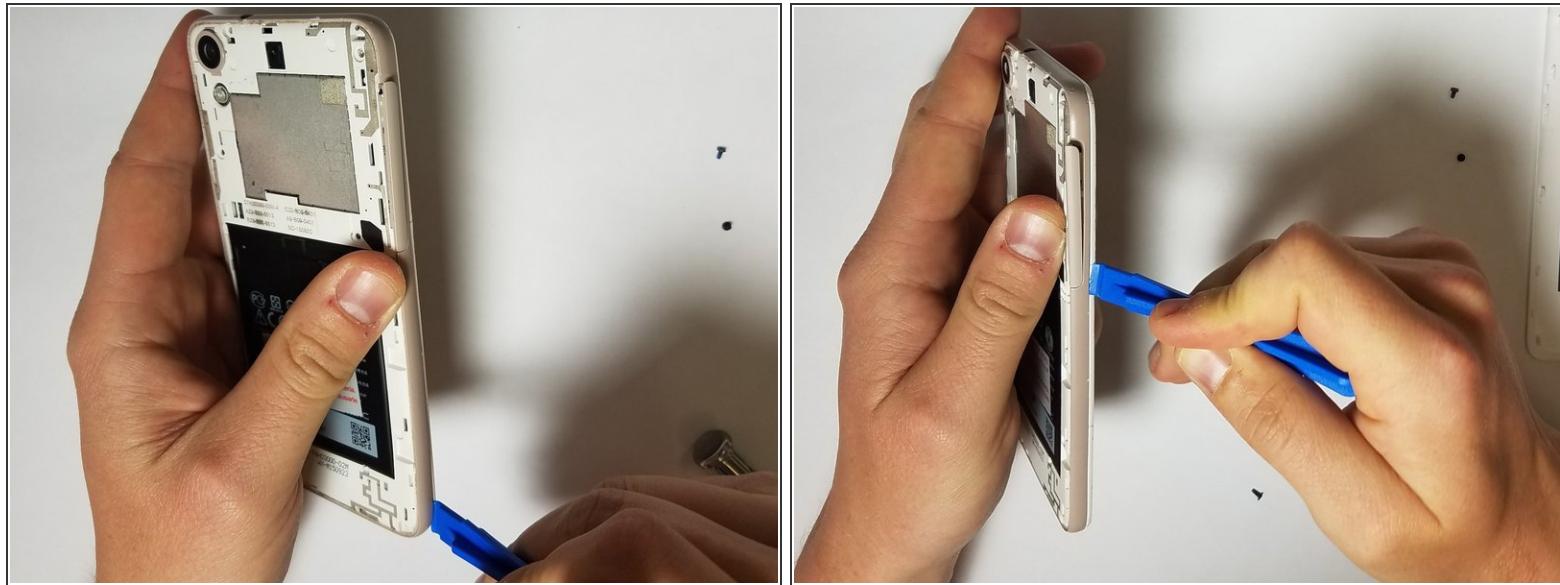

- Once the screws are removed, use the plastic opening tool to remove the remaining plastic cover.
- Start from the corners of the phone, and insert the plastic opening tool between the outer colored rim and the screen.
- This portion of the cover will be more difficult to remove than the initial back cover. Be patient and gentle around the button holes.

To reassemble your device, follow these instructions in reverse order.