




HTC Desire 826 Back Camera Replacement

How to replace your back camera to your HTC Desire 826.

Written By: Jordan Warnix

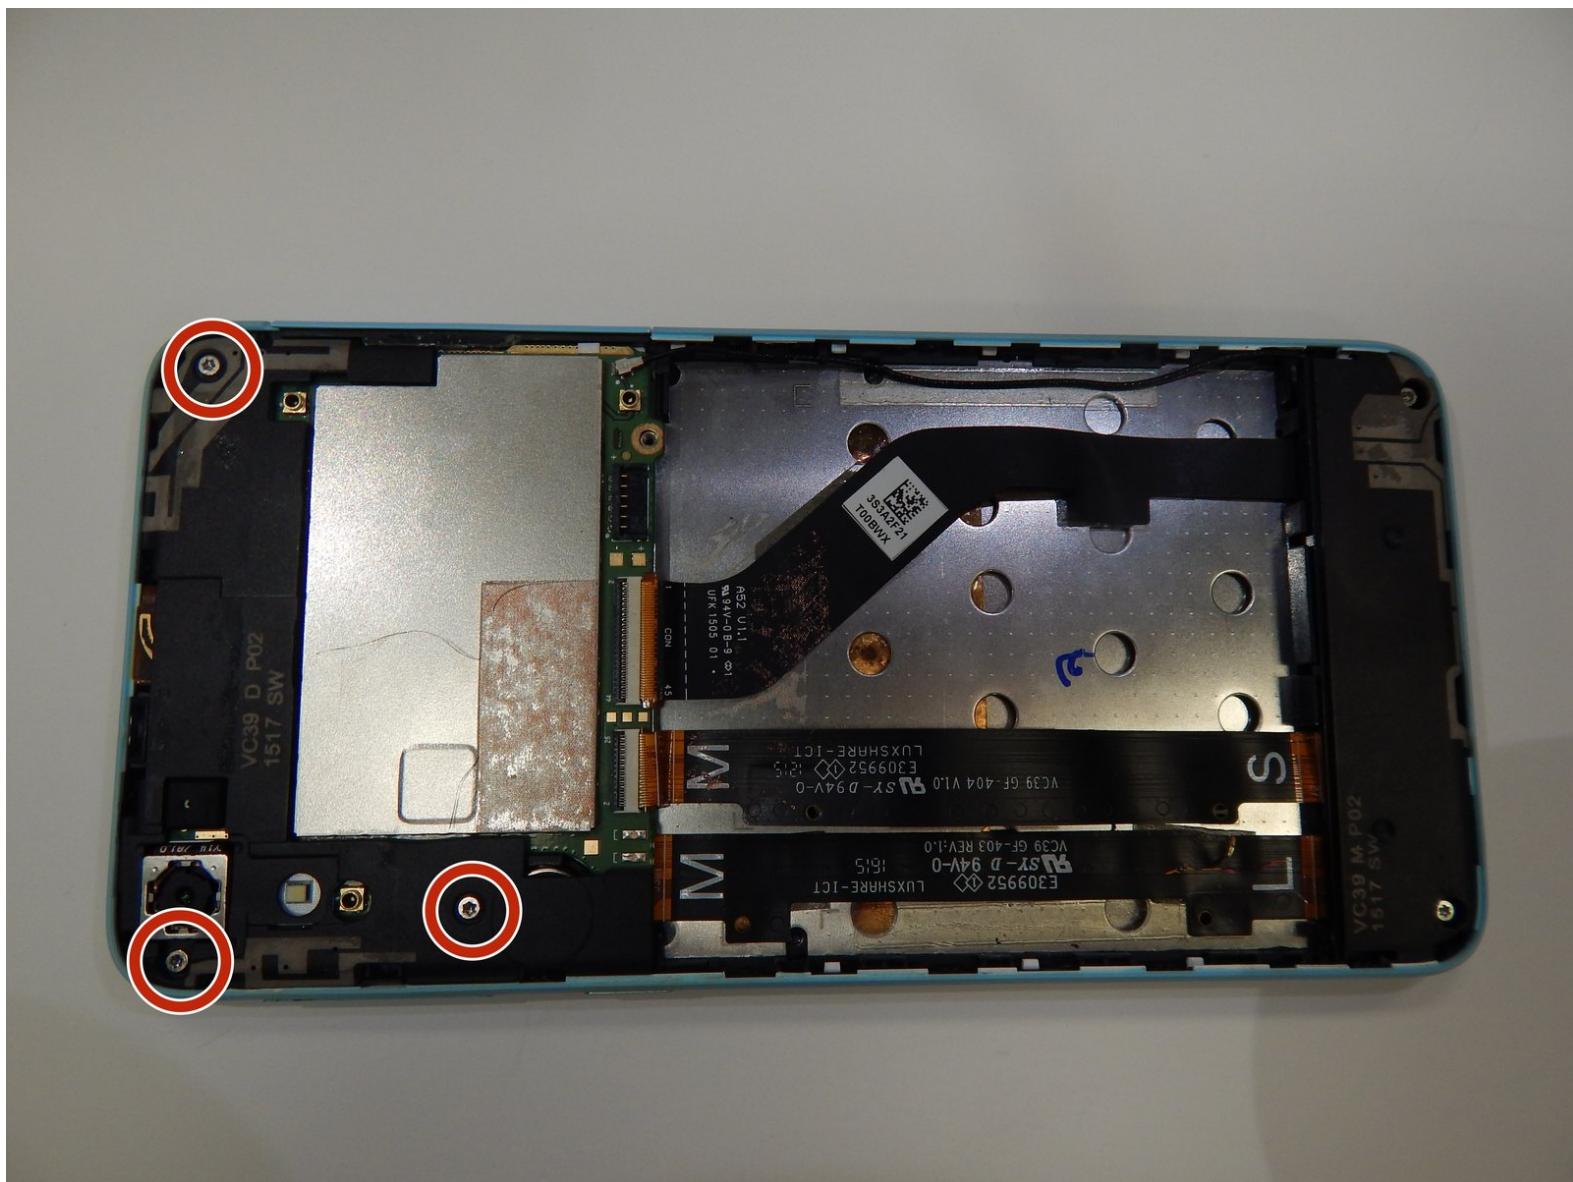

INTRODUCTION

This guide will help you with replacing your back camera of your HTC Desire 826.

TOOLS:

- [T5 Torx Screwdriver](#) (1)
- [Tweezers](#) (1)
- [Magnetic Project Mat](#) (1)
- [Spudger](#) (1)

Step 1 — Battery



- Find a seam in the back of the device
- Insert the plastic spudger into the seam and pry off the back panel


(i) There will be glue, so keep prying until it comes off or you may need to heat up the edges of the device to loosen the adhesive with the [iOpener](#).

Step 2




- Remove the 4.0 mm screw above the battery with the T5 screwdriver.
- Remove the metal covering with the tweezers

Step 3

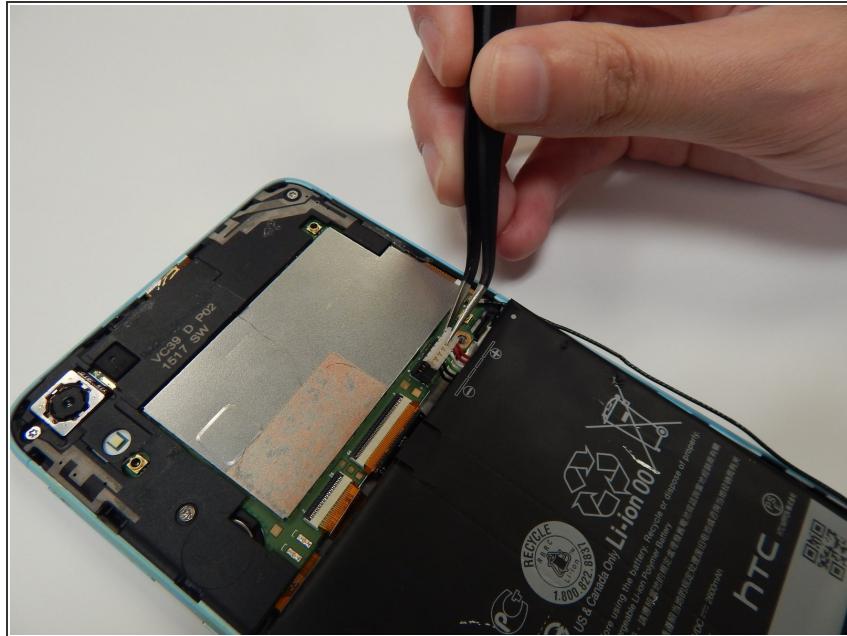


- Disconnect battery cable attached to the motherboard with the tweezers.

Step 4

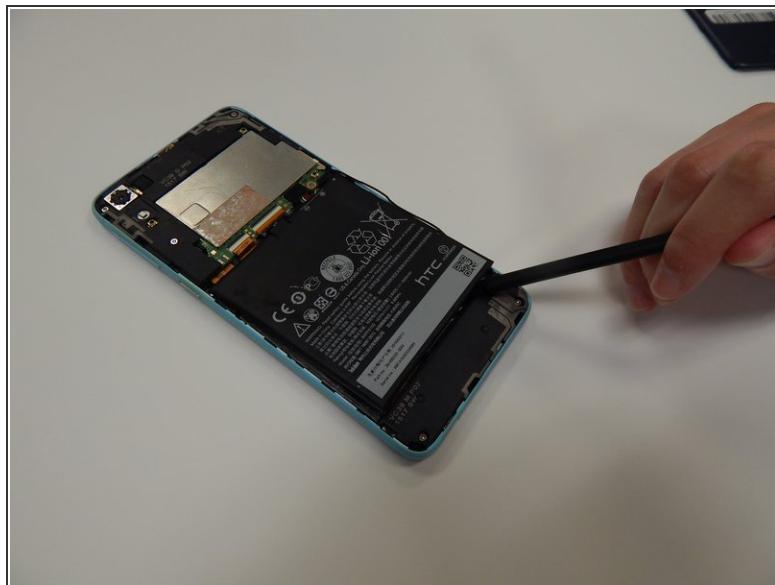


- Lift battery with plastic spudger and remove

Step 5 — Back Camera

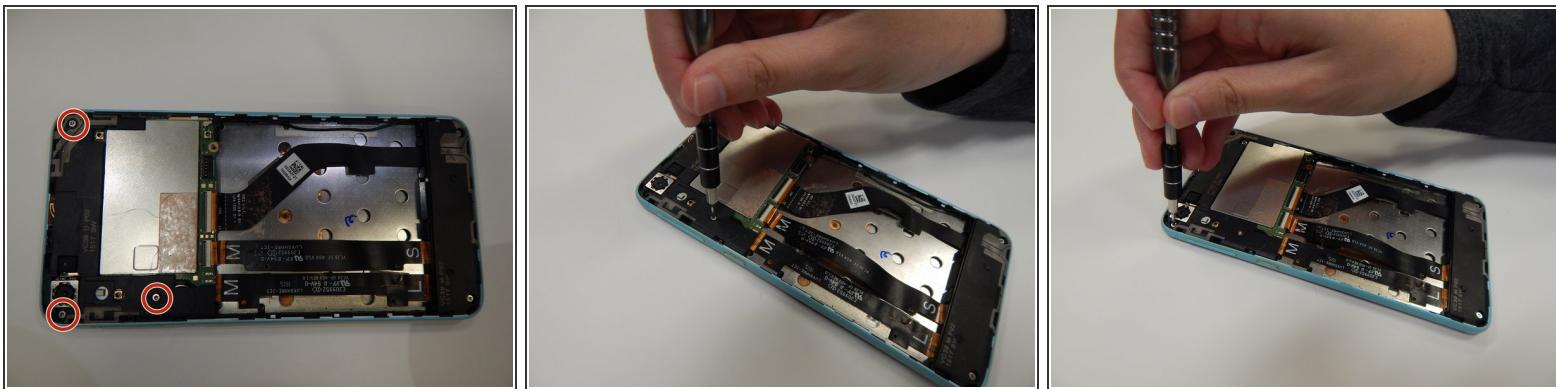


- Use the T5 screwdriver to remove the three 4.0 mm screws as shown.

Step 6

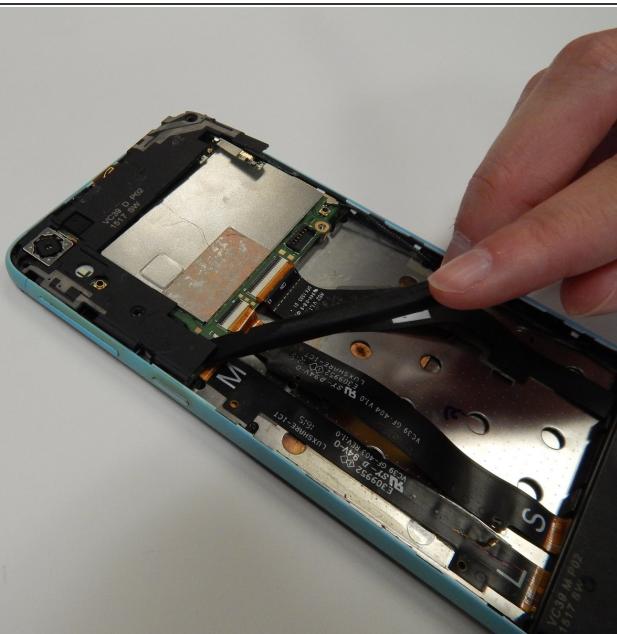

- Use the spudger to lift the black plastic covering.

Step 7

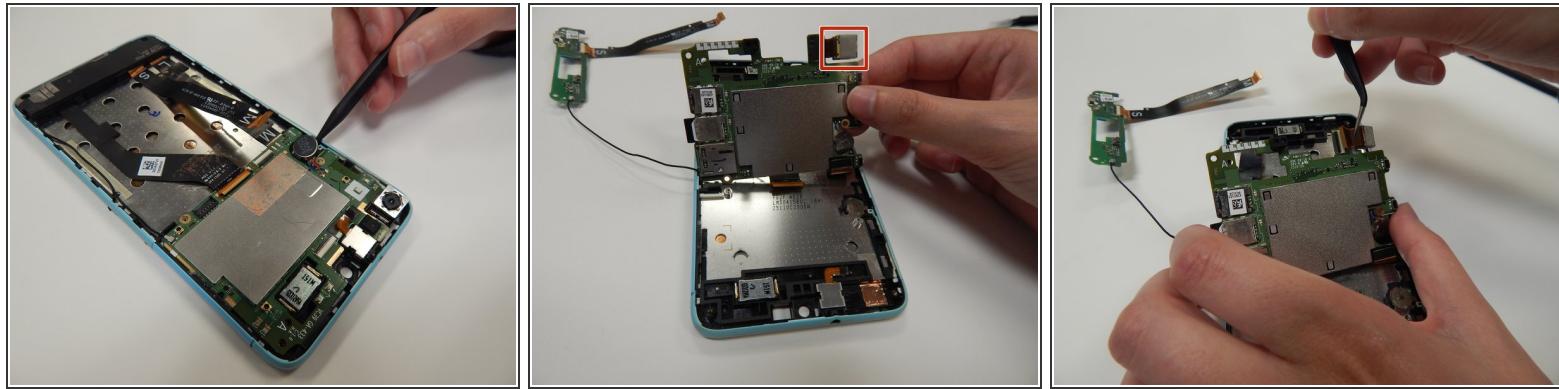

- Use the spudger to lift the green board. The back camera is attached on the side as shown.
- Use the tweezers to disconnect and remove the camera.

To reassemble your device, follow these instructions in reverse order.