



# HTC Desire 826 Front Camera Replacement

How to replace your front camera to your HTC Desire 826.

Written By: Sydney Hicks



## INTRODUCTION

Follow this guide to replace your HTC Desire 826 front camera.

### TOOLS:

- [T5 Torx Screwdriver](#) (1)
- [Tweezers](#) (1)
- [Magnetic Project Mat](#) (1)
- [Spudger](#) (1)

## Step 1 — Battery



- Find a seam in the back of the device
- Insert the plastic spudger into the seam and pry off the back panel


*(i)* There will be glue, so keep prying until it comes off or you may need to heat up the edges of the device to loosen the adhesive with the [iOpener](#).

## Step 2




- Remove the 4.0 mm screw above the battery with the T5 screwdriver.
- Remove the metal covering with the tweezers

## Step 3

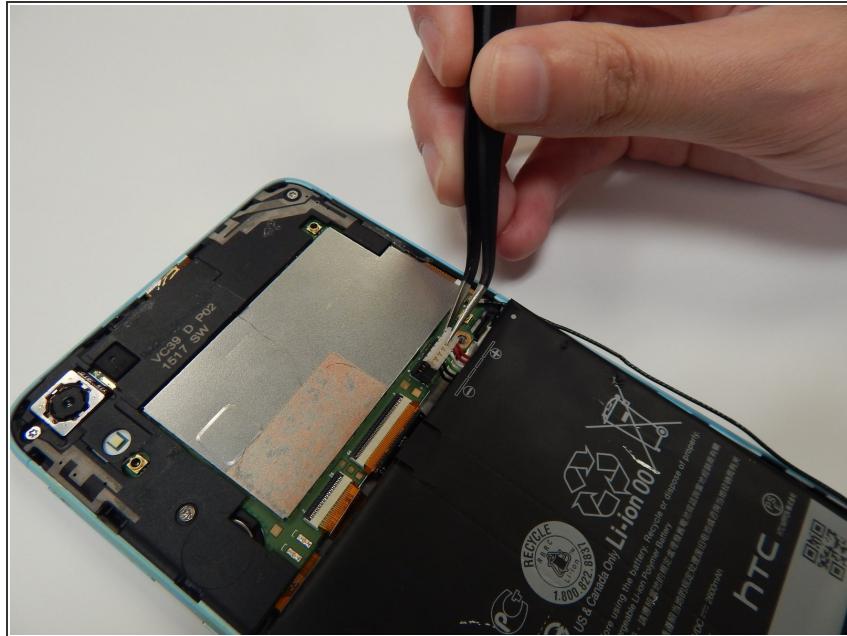


- Disconnect battery cable attached to the motherboard with the tweezers.

## Step 4

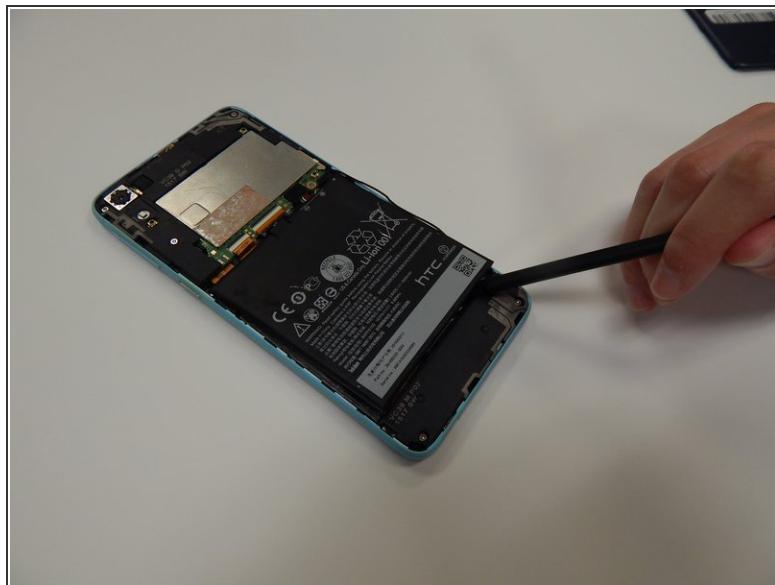


- Lift battery with plastic spudger and remove

## Step 5 — Front Camera

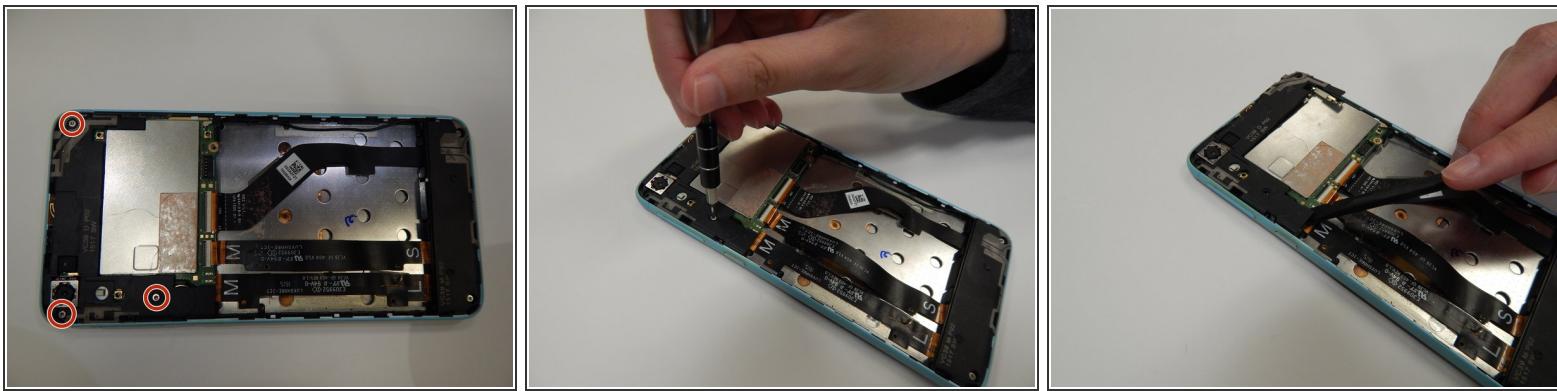

- Use the T5 screwdriver to remove the three 4.0 mm screws as shown.
- Once the screws are removed, pry up the top plastic panel using the black nylon spudger.

## Step 6

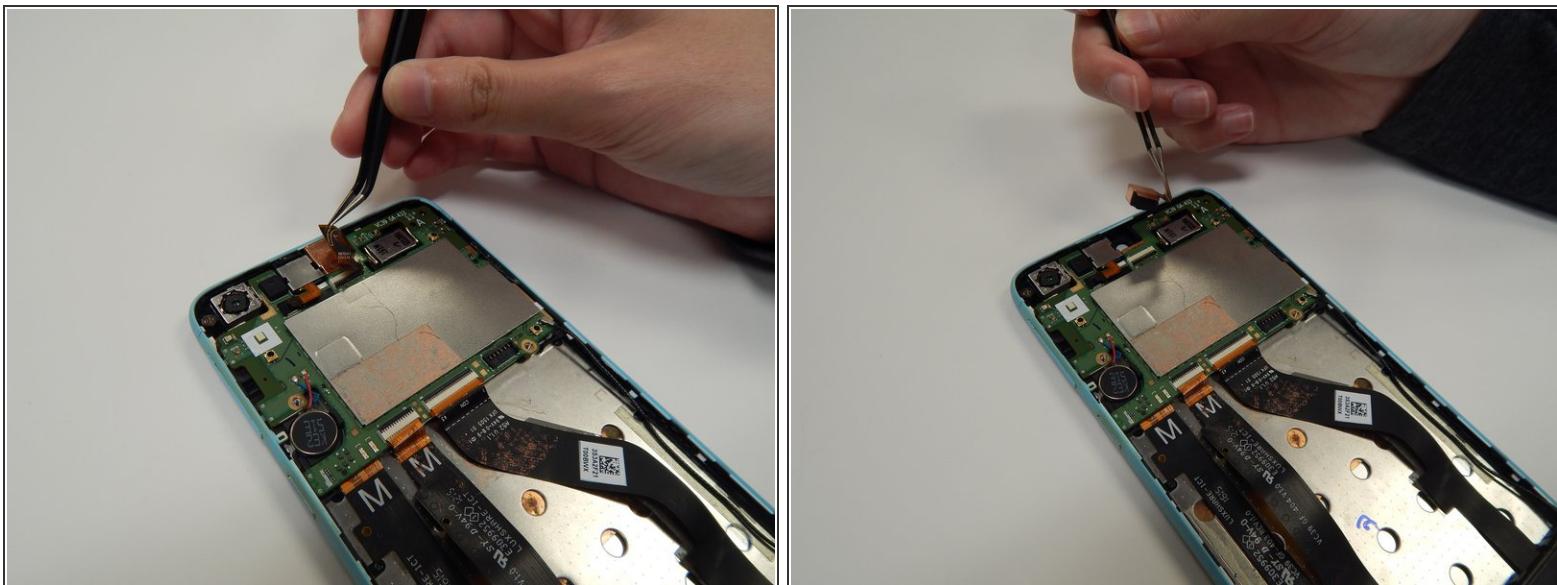

- Use the tweezers to detach the cameras wire from the top motherboard
- Then use the tweezers to remove the camera

To reassemble your device, follow these instructions in reverse order.