




HTC Desire 826 Screen Replacement

How to replace your screen to your HTC Desire 826.

Written By: Julia Zimmerman

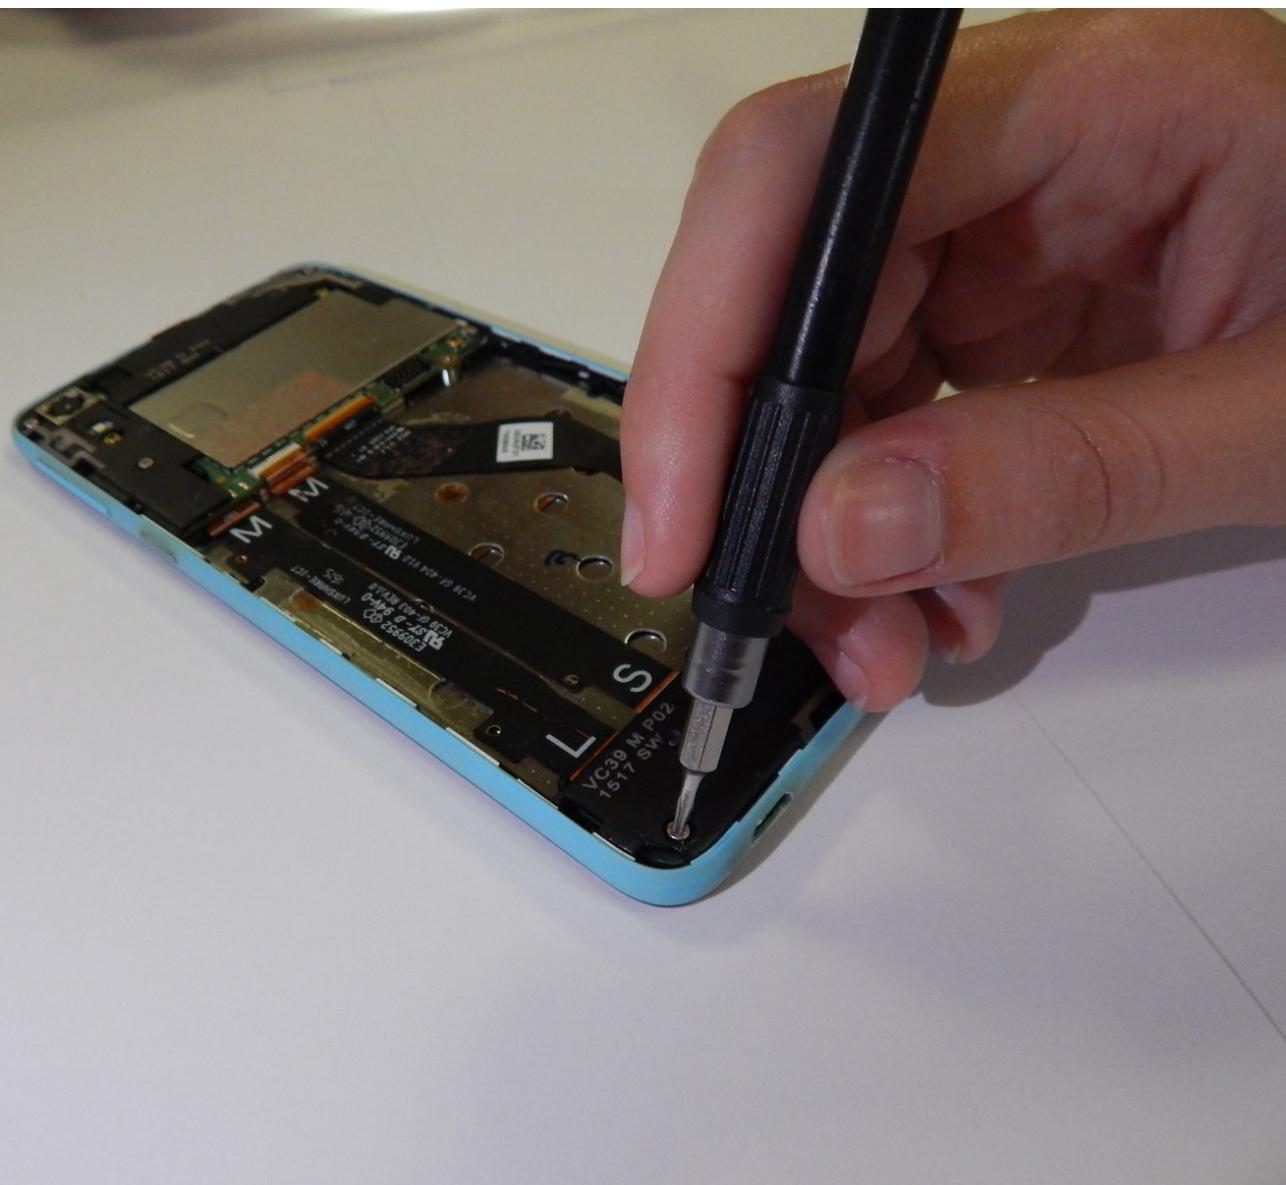

INTRODUCTION

How to replace your screen to your HTC Desire 826.

TOOLS:

- [Spudger \(1\)](#)
- [Metal Spudger Set \(1\)](#)
- [T5 Torx Screwdriver \(1\)](#)
- [Tweezers \(1\)](#)
- [Magnetic Project Mat \(1\)](#)

Step 1 — Battery



- Find a seam in the back of the device
- Insert the plastic spudger into the seam and pry off the back panel


(i) There will be glue, so keep prying until it comes off or you may need to heat up the edges of the device to loosen the adhesive with the [iOpener](#).

Step 2



- Remove the 4.0 mm screw above the battery with the T5 screwdriver.
- Remove the metal covering with the tweezers

Step 3

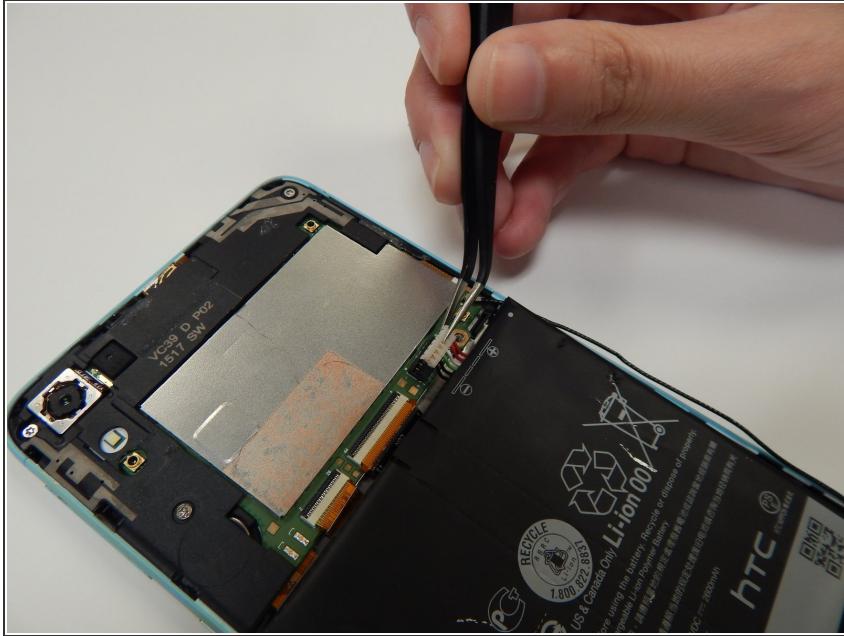



- Disconnect battery cable attached to the motherboard with the tweezers.

Step 4




- Lift battery with plastic spudger and remove

Step 5 — Screen

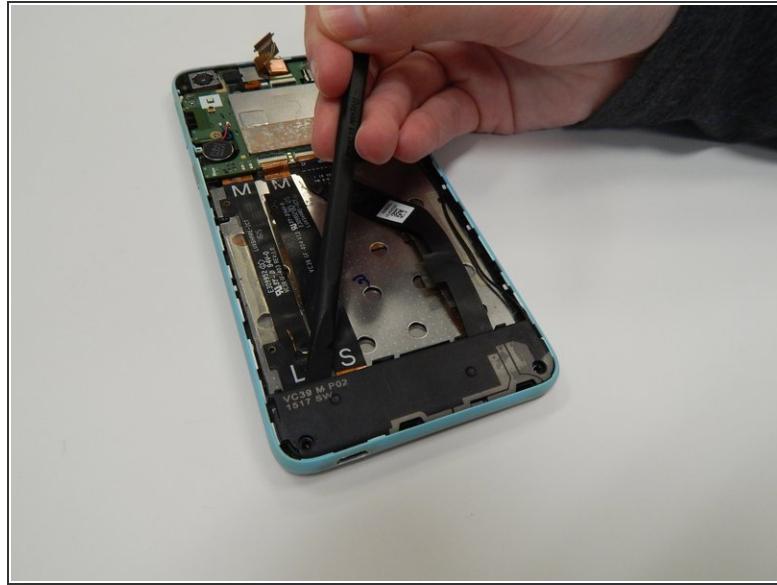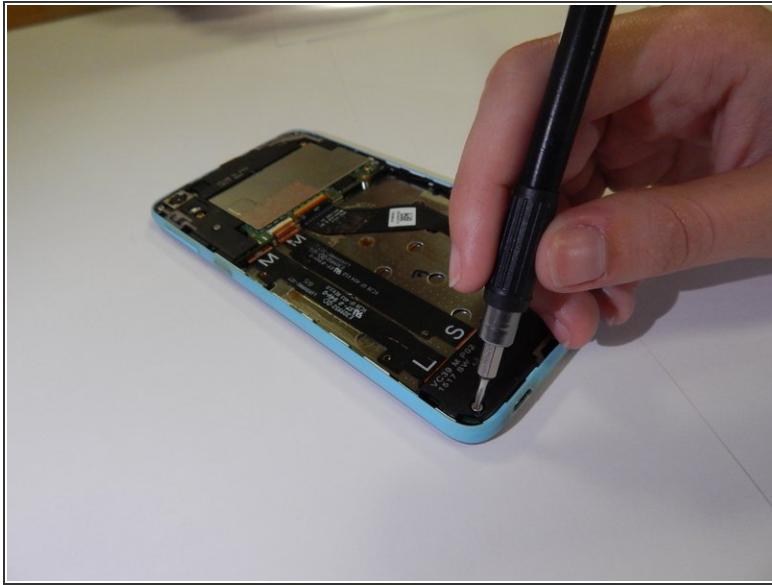


- Remove the two 4.0 mm screws attaching the bottom plastic panel using a T5 screwdriver.
- Remove the black plastic cover using a plastic spudger

Step 6

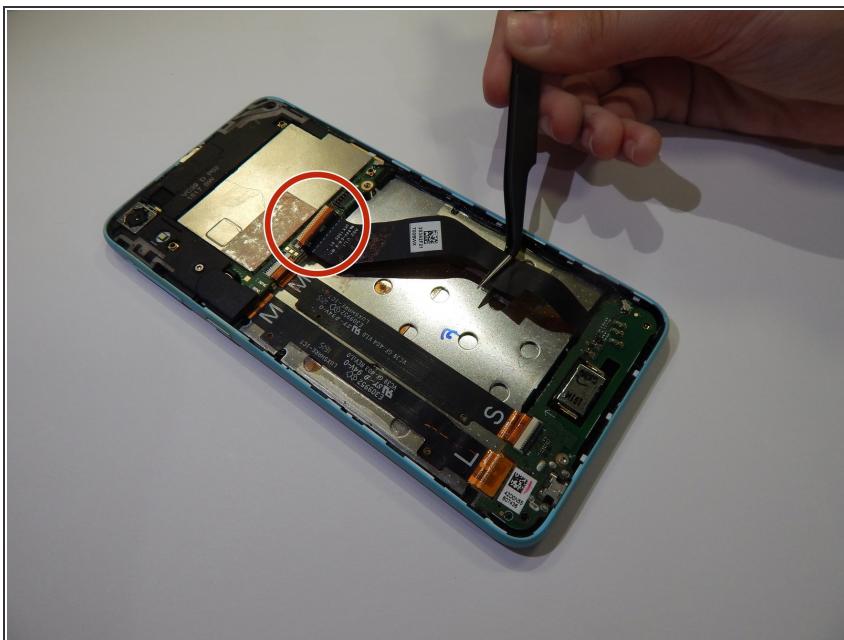

- Use tweezers to pry the wire up from the battery bed
- Detach the ribbon cable by pulling with the tweezers where circled in blue
- Flip the phone over so the screen side is facing up for the next step

Step 7

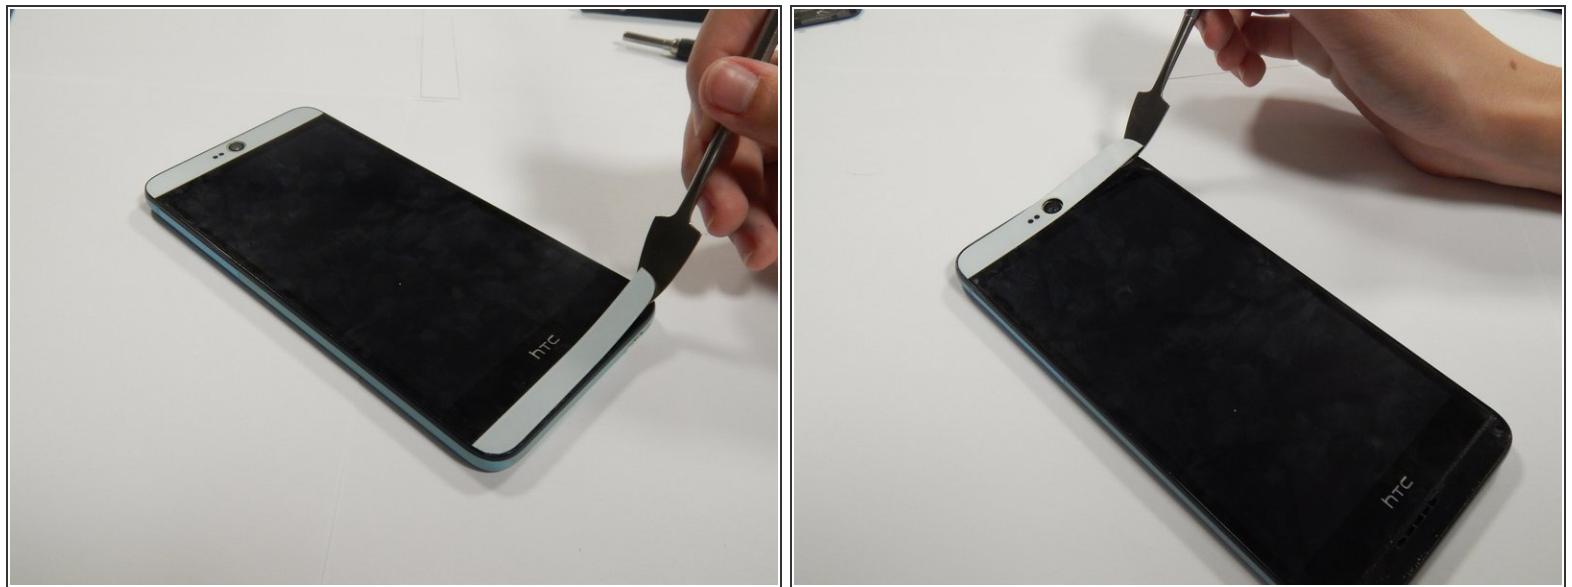

- Use the metal spudger to pry up the plastic cover pieces from the front of the phone

Step 8



- Pry up the edges of the screen using the metal spudger
- Then use the suction cup to remove the screen from your device

(i) There will likely be glue holding your screen in place, so keep prying but be cautious not to break the screen. You may want to use the [iOpener](#) to loosen the adhesive prior to removal.

To reassemble your device, follow these instructions in reverse order.