



# HTC Desire V Midframe Replacement

This guide will teach you to remove the middle cover of the HTC Desire V smartphone.

Written By: William McCusker



## INTRODUCTION

This guide will teach you to remove the middle cover of the HTC Desire V smartphone, the one between the battery cover and the chassis.

### **TOOLS:**

- [iFixit Opening Tools](#) (1)
- [Spudger](#) (1)
- [T5 Torx Screwdriver](#) (1)

### **PARTS:**

- [HTC Desire V Middle Cover](#) (1)

## Step 1 — Battery




- Gently pry back cover away from phone.
- ⓘ If you are having difficulty you may need to use a Spudger or plastic opener.

## Step 2



- Lever the battery out from the bottom end first.
- ⚠ Do not bend or puncture the battery.

## Step 3 — Midframe

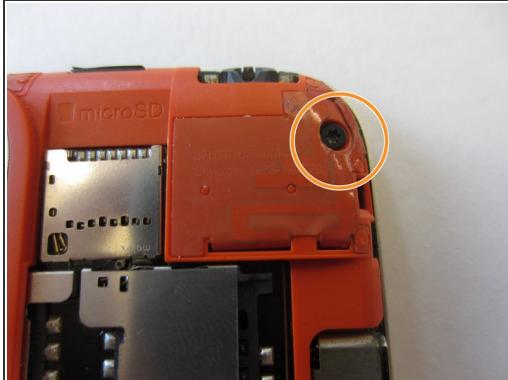

- Use a Torx T5 screwdriver to unscrew and remove five 3.0 mm screws from the rear frame.

## Step 4



- Use an opening tool or a spudger to gently remove the rear frame.

To reassemble your device, follow these instructions in reverse order.