




HTC Desire V Speaker Replacement

This guide will outline how to remove and replace the main rear speaker of the HTC Desire V smartphone.

Written By: William McCusker

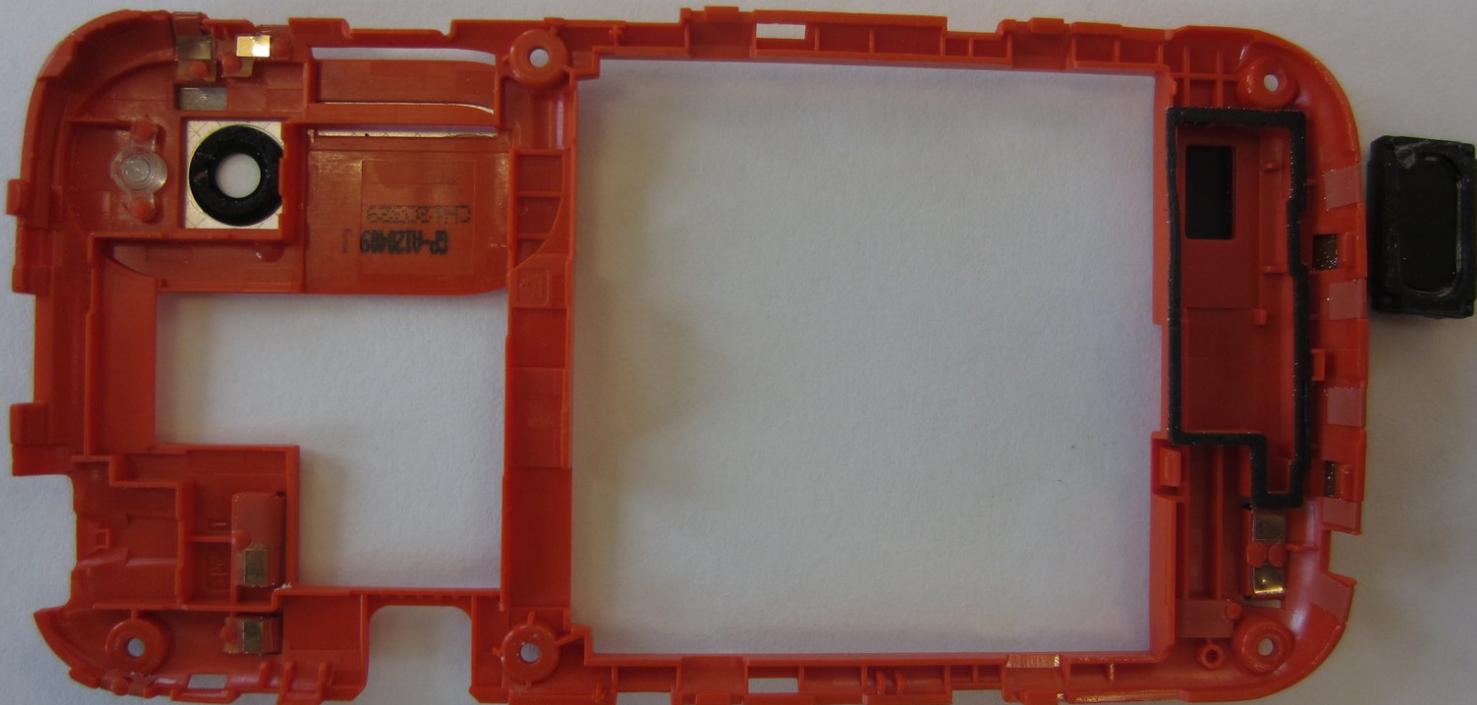

INTRODUCTION

This guide will outline how to remove and replace the main rear speaker of the HTC Desire V smartphone.

TOOLS:

- [iFixit Opening Tools](#) (1)
- [Spudger](#) (1)
- [T5 Torx Screwdriver](#) (1)

Step 1 — Battery




- Gently pry back cover away from phone.
- ⓘ If you are having difficulty you may need to use a Spudger or plastic opener.

Step 2



- Lever the battery out from the bottom end first.
- ⚠ Do not bend or puncture the battery.

Step 3 — Midframe

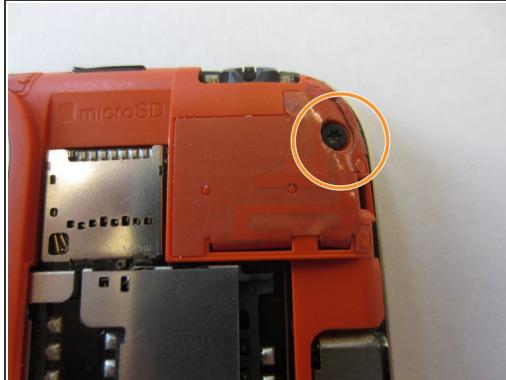



- Use a Torx T5 screwdriver to unscrew and remove five 3.0 mm screws from the rear frame.

Step 4



- Use an opening tool or a spudger to gently remove the rear frame.

Step 5 — Speaker

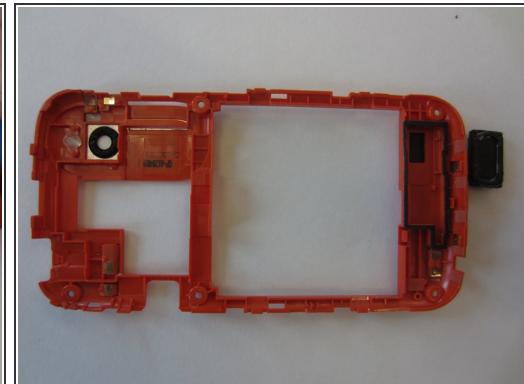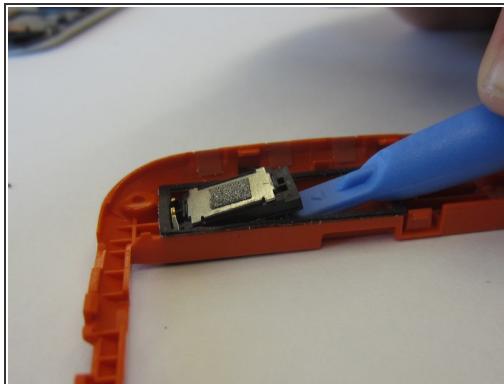

- Using a smaller prying tool, spudger or similar, lever up the speaker at the bottom end of the phone shown in the picture (bottom right)
- The bottom is sticky, so expect some resistance

To reassemble your device, follow these instructions in reverse order.