




# HTC Desire Vibrator Replacement

Replacing a faulty Vibrator in your HTC Desire.

Written By: Lucas Tenney

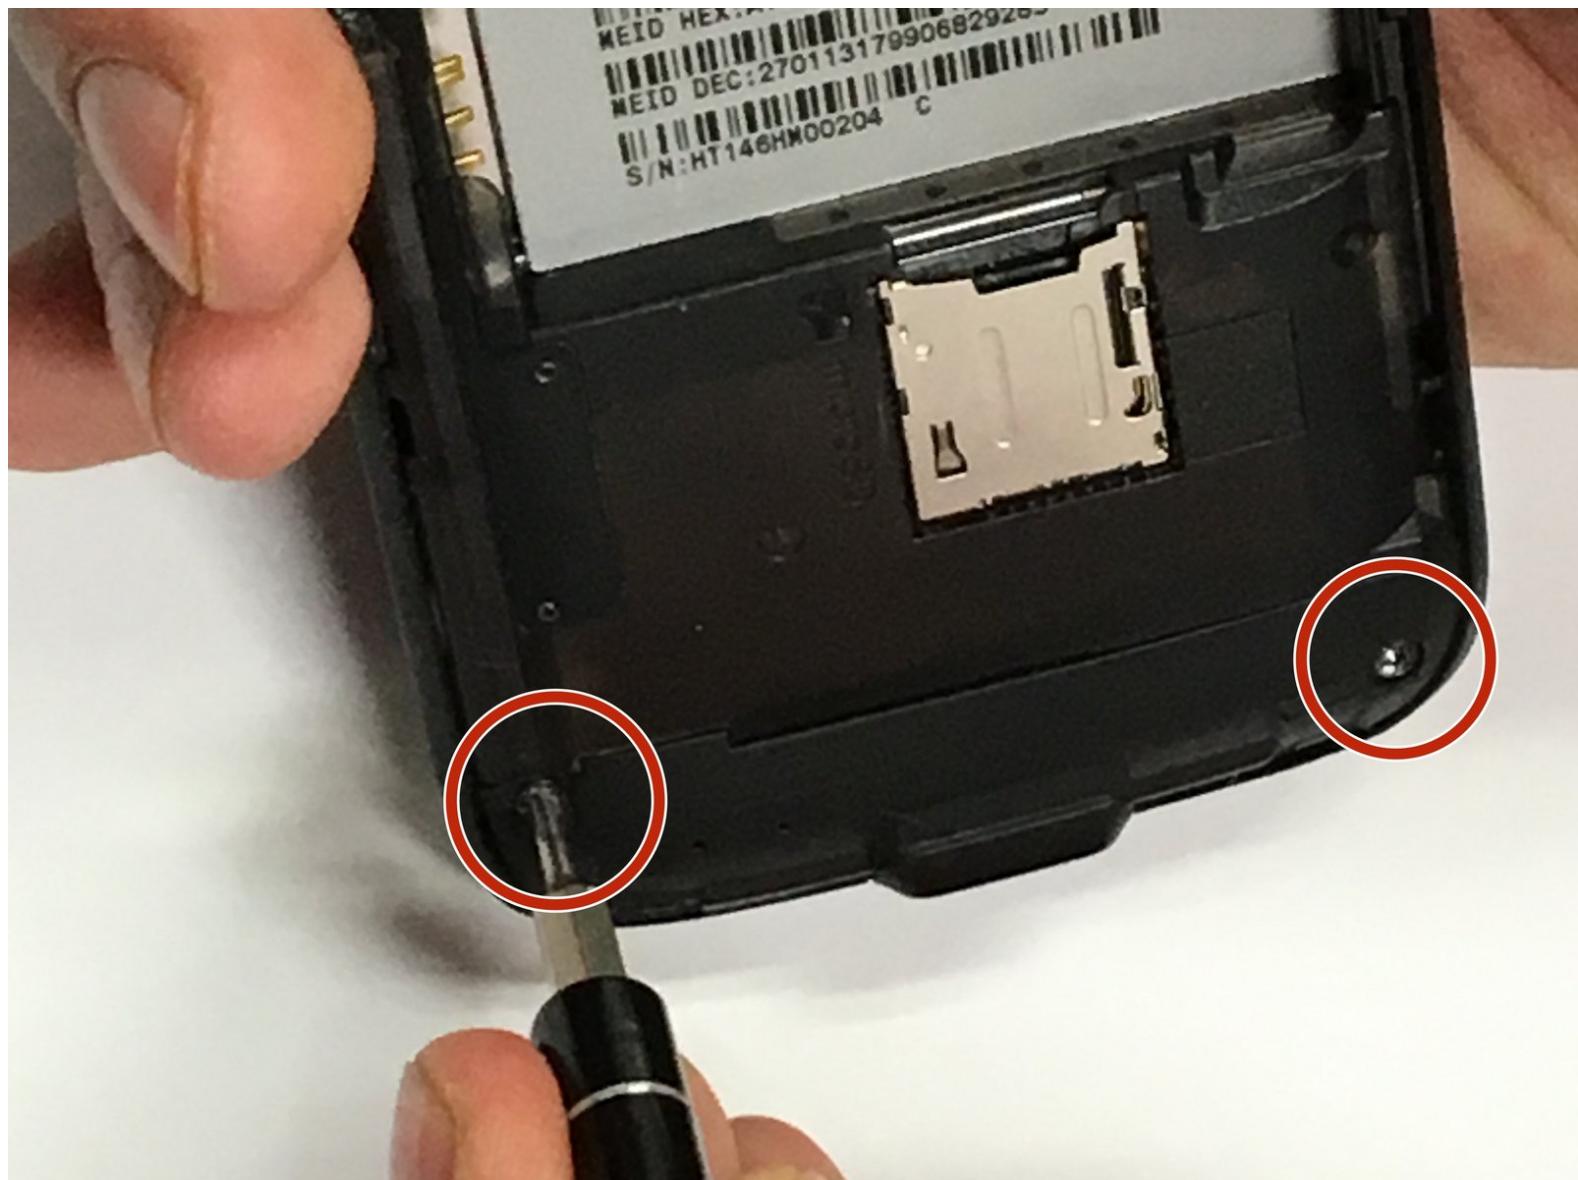

## INTRODUCTION

This guide will teach anyone how to replace a faulty vibrator in their HTC Desire.

### TOOLS:

- Spudger (1)
- T5 Torx Screwdriver (1)

### PARTS:

- Replacement HTC Desire vibrator (1)

## Step 1 — Battery




- Insert flat end of spudger into slot on the top of phone to pry off the back plate.

## Step 2




- Use flat edge of spudger to lift the bottom right corner of the battery.
- Lift the battery out of the phone.

## Step 3 — Vibrator

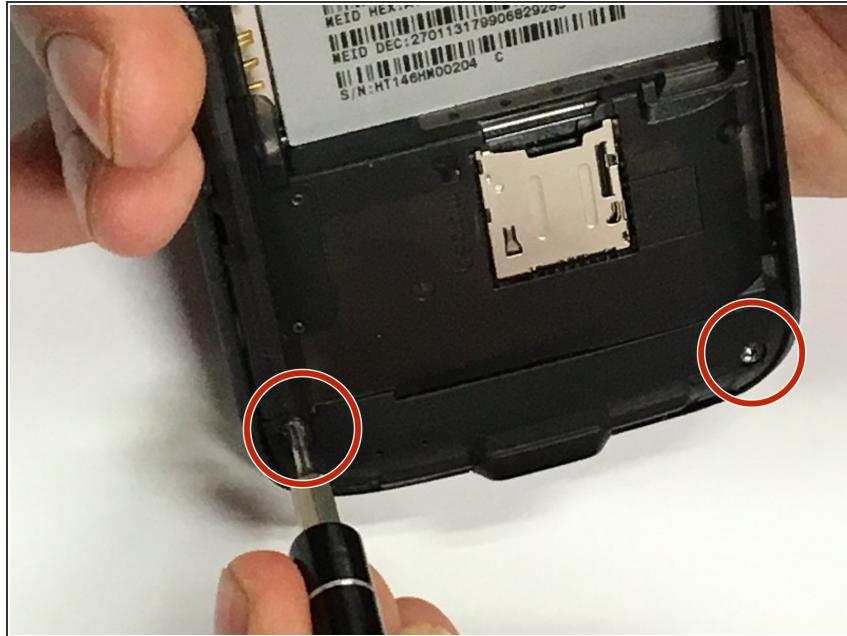


- Remove the lower, two 0.5 mm screws using Torx T5 screwdriver.

## Step 4

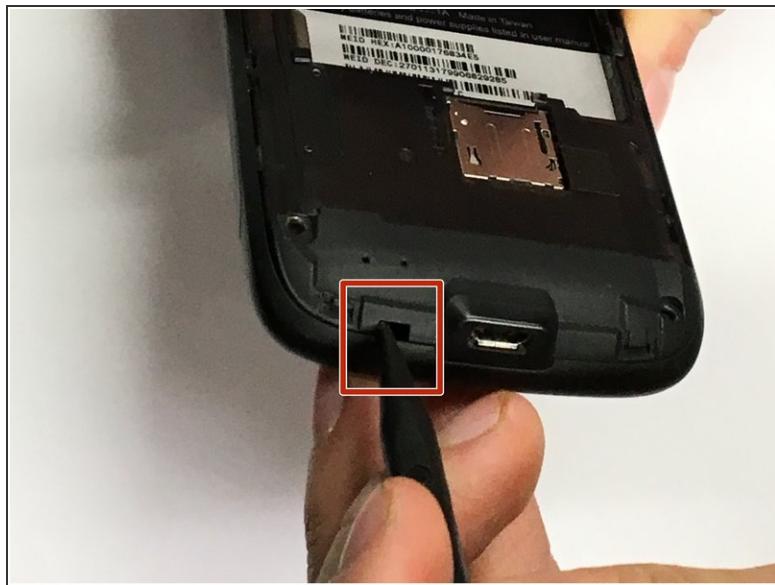

- Use spudger to pry vibrator panel off.

## Step 5

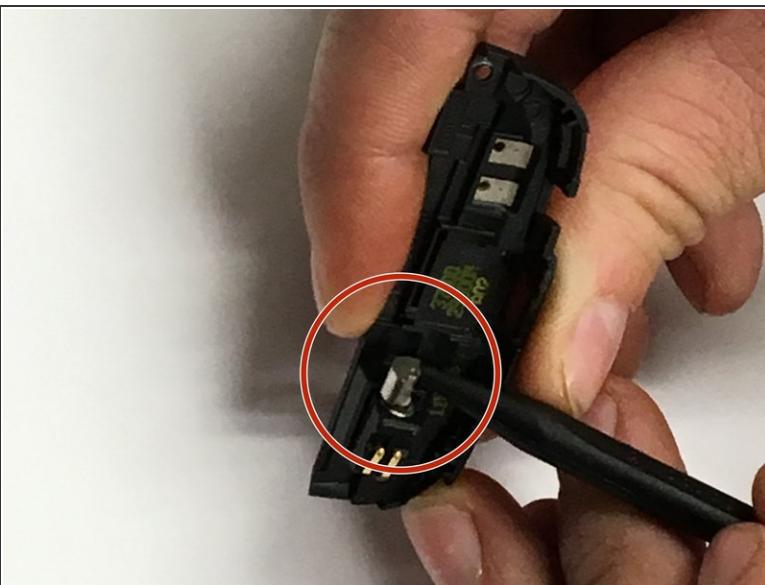

- Use spudger to remove the vibrator.

To reassemble your device, follow these instructions in reverse order.