



# HTC EVO Design 4G Camera Lens Replacement

For this procedure, you will partially disassemble the phone to replace the camera lens of the HTC EVO Design 4G.

Written By: Victoria



This document was generated on 2019-09-23 02:52:59 PM (MST).

 **TOOLS:**

- [Tweezers \(1\)](#)
- [Phillips #000 Screwdriver \(1\)](#)
- [T4 Torx Screwdriver \(1\)](#)
- [Flathead 3/32" or 2.5 mm Screwdriver \(1\)](#)
- [iFixit Opening Tools \(1\)](#)
- [iFixit Opening Picks set of 6 \(1\)](#)

## Step 1 — Camera Lens



- Tools Needed: 1. Safety pry tool (guitar pick), 2. Tweezers, 3. Phillips Screwdriver, 4. Star tip Precision Screwdriver, 5. Flathead Screwdriver

## Step 2 — Step 2



- Use your safety pry tool on the outside edges of the back casing to lift and remove it

## Step 3 — Step 3




- Take your flathead and stick it into the holes to the left of the lens and carefully work your way around the perimeter pushing up the lens until it snaps off

## Step 4 — Step 4



- Remove old lens.
- Place replacement lens over the camera lens and it should loosely snap on
- Info\*: Don't worry if the cover is loose because the cover of the phone would hold it in place

## Step 5 — Step 5

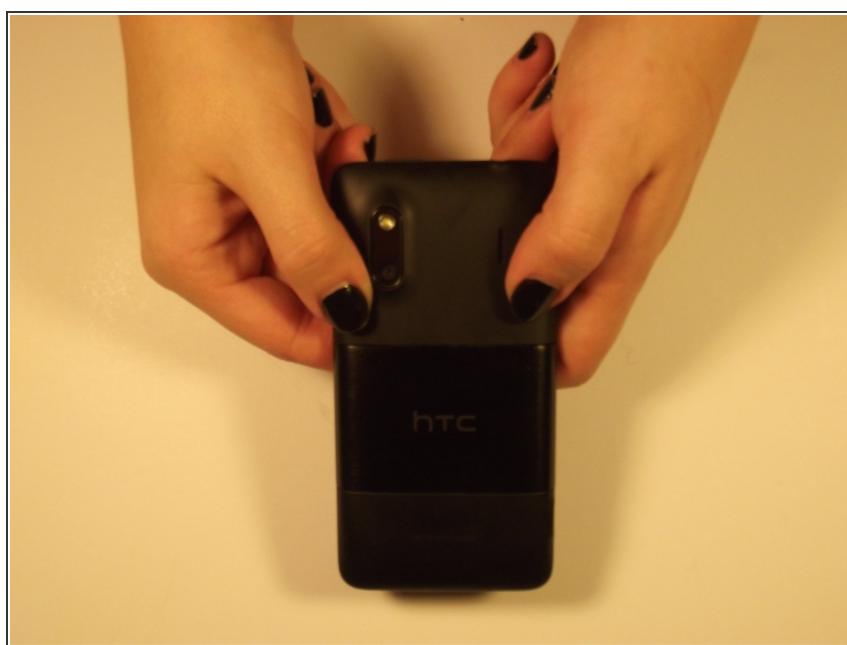

- Snap the cover back into place

