



HTC Flyer Back Cover Replacement

This guide shows you how to remove and replace the back cover of your HTC Flyer.

Written By: Justin Funk



INTRODUCTION

Do you need to access the inner components of your device? Consider using this guide to remove the back cover of your device.

TOOLS:

- [T5 Torx Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)

Step 1 — Back Cover



- Apply pressure along the bottom of the white panel containing the camera and push upwards.
- *i* It may take some effort, but it will smoothly slide off.

Step 2



- Unscrew the four of 3.5mm Torx T5 screws that run along the sides of the exposed innards.
- *i* All screws in the device will use the Torx T5 screwdriver, so keep it handy.

Step 3





- Remove the black protective piece of plastic by sliding it upwards.
- Remove the two 3.5mm Torx #5 screws holding the protective plastic down on along the sides.

⚠ A center 3.5mm Torx screw will be covered by "VOID" sticker.

- Either remove the sticker or jam the screwdriver into the screw, and remove the screw.
- Remove the protective panel by sliding it upwards.

Step 4

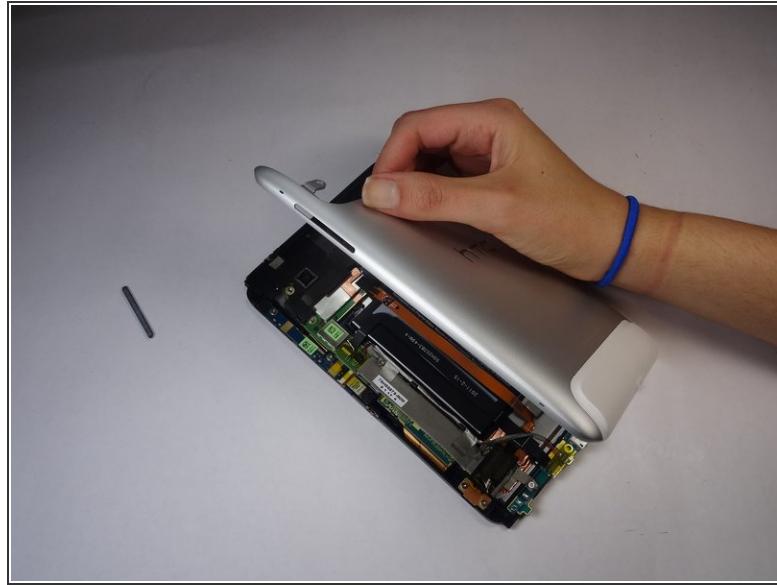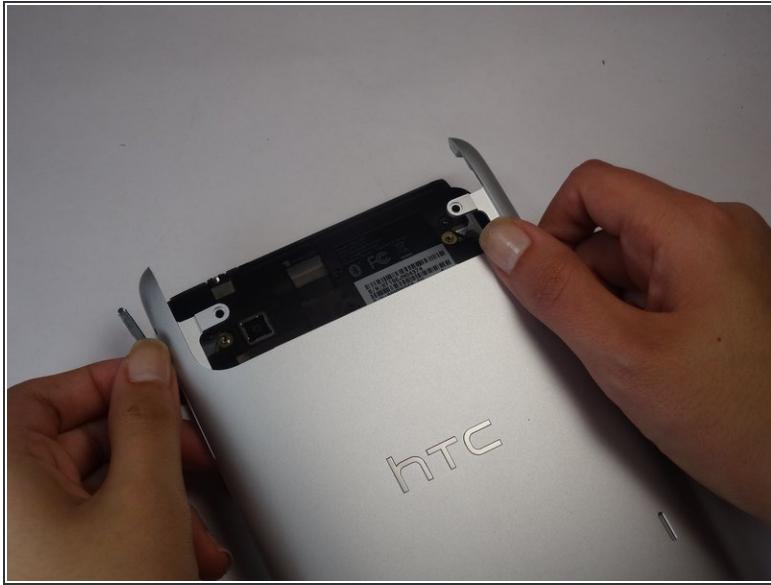

- Before removing the back cover, apply some scotch tape to the volume buttons to prevent them from falling out of the back panel.
- Use a plastic opening tool to lever up the top half of the cover.
- Lift the back panel up and remove it from the device.

To reassemble your device, follow these instructions in reverse order.