



HTC One Mini Rear Case Replacement

Use this guide to replace the rear case of your HTC One Mini.

Written By: Chris Jose



 **TOOLS:**

- [iOpener \(1\)](#)
- [iFixit Opening Tools \(1\)](#)
- [T6 Torx Screwdriver \(1\)](#)

Step 1 — iOpener Heating




- Use an iOpener or hair dryer to apply heat to the lower speaker grille, in order to soften the adhesive underneath.

Step 2 — Remove Speaker Grills



- Slide a thin pry tool underneath the lower speaker cover and slide it across to separate the adhesive underneath.
- Remove the lower speaker cover.

Step 3 — Remove Screw

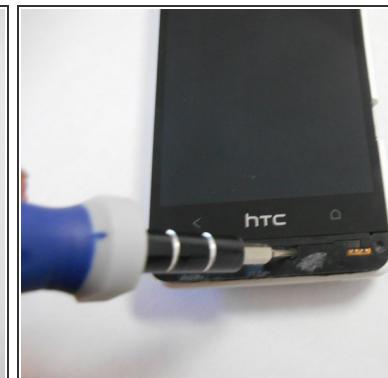

- Remove the screw under the speaker cover using a T6 Torx screwdriver.

Step 4



- Slide a thin guitar pick or pry tool between the edge of the display and the rear case, near the bottom of the phone.
- Carefully work your way up each side of the display and separate the rear case. There are three clips on each side.

Step 5 — Separate Rear Case



- Remove the rear case from the phone.

To reassemble your device, follow these instructions in reverse order.