



HTC One V Loudspeaker Replacement

This guide will provide the steps to install a new back loudspeaker in your HTC One V.

Written By: abebe alemu



INTRODUCTION

If your speaker sounds distorted or muffled, or completely does not work, a broken loudspeaker might be the problem. A new one can be installed using this guide.

TOOLS:

- [Phillips #0 Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)
- [Spudger](#) (1)

PARTS:


- [HTC ONE V LoudSpeaker](#) (1)

Step 1 — Disassembling HTC ONE V Bottom Assembly





- Power off your device.
- Remove the bottom cover by sliding it off.

Step 2

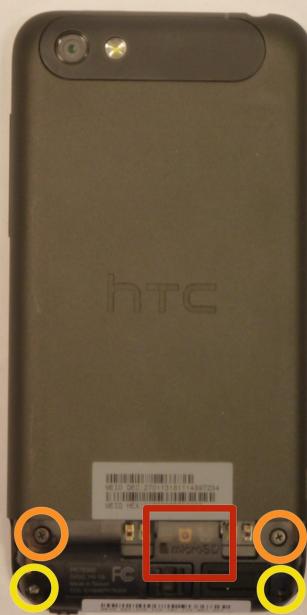


- Remove the SIM card.
- Remove the four screws securing the bottom casing.
 - Two 3.0 mm Phillips #0 screws in the top left and right corners.
 - Two 2.0 mm Phillips #0 screws in the bottom left and right corners.

Step 3

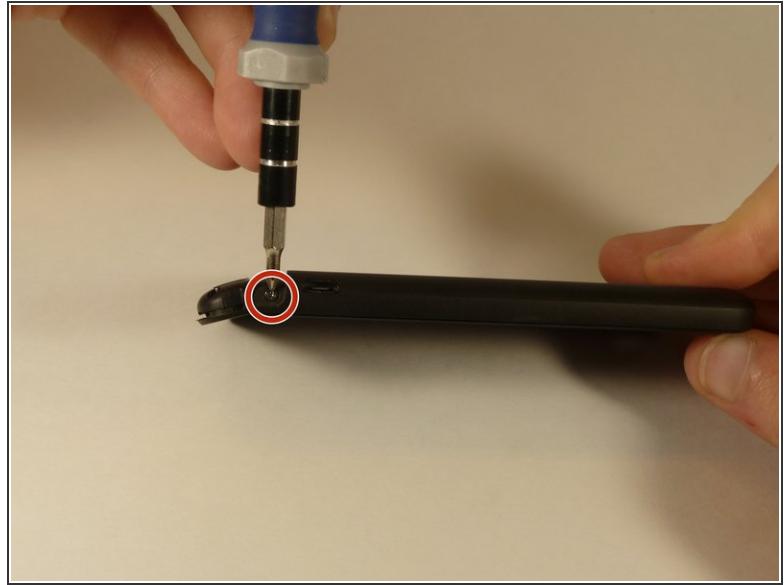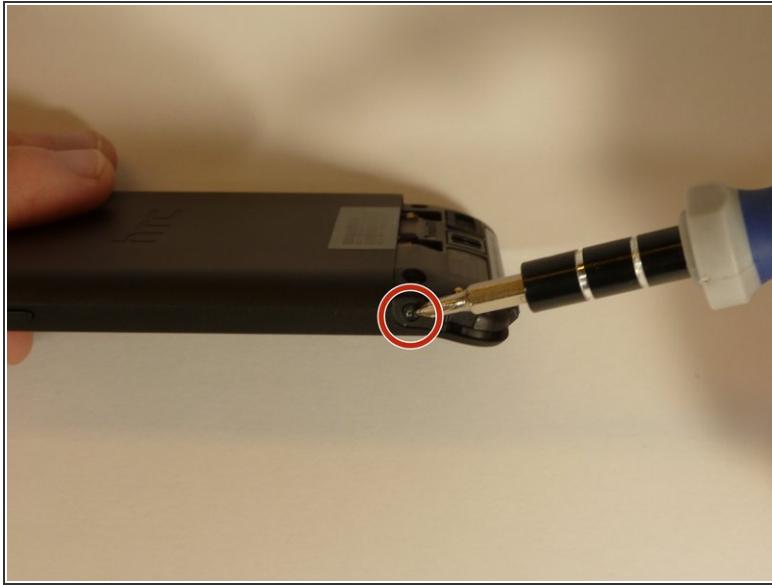


- Remove the 2.0 mm Phillips #0 screws on either side of the phone.

Step 4

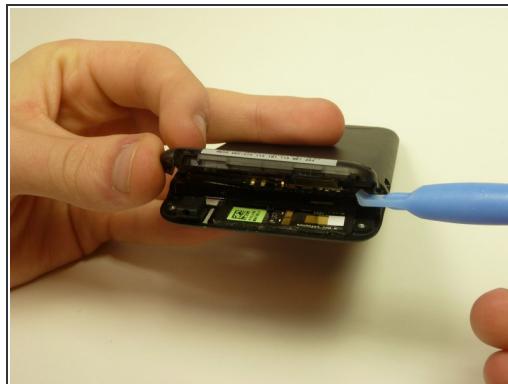


- Use a plastic opening tool to pry open the bottom casing.
- Remove the bottom casing by pulling it towards you.

Step 5 — Loudspeaker

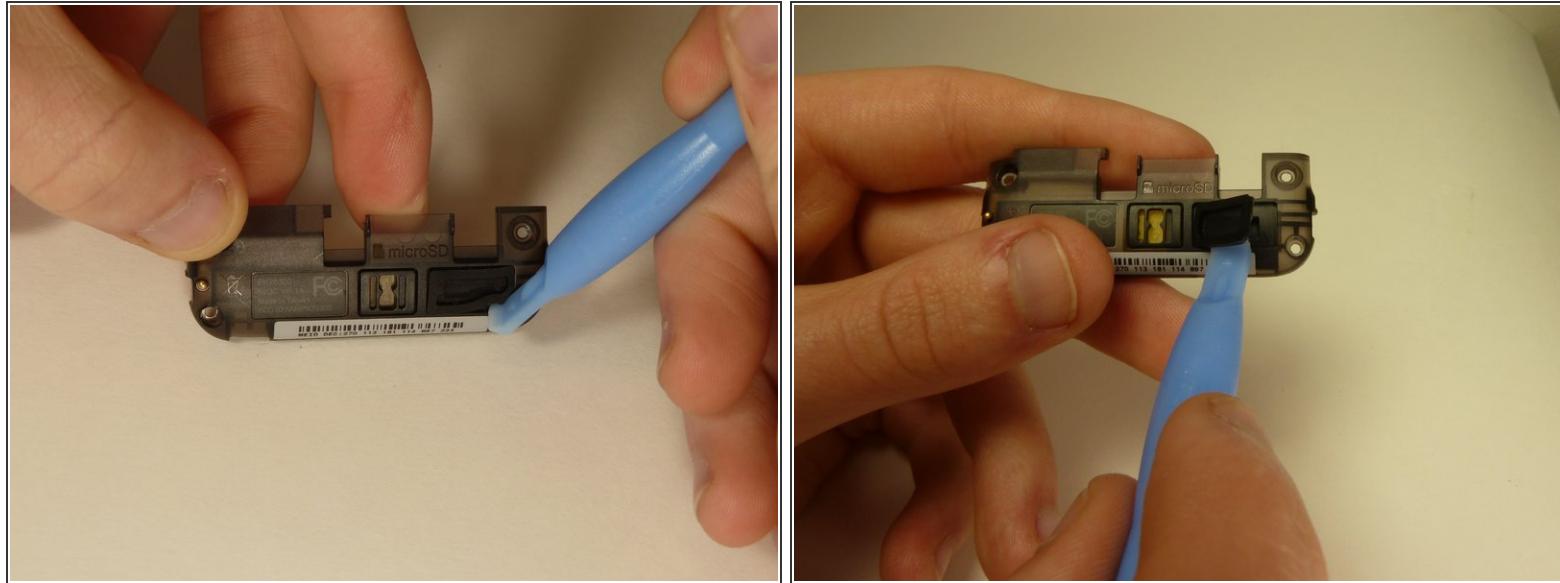

- Using a plastic opening tool, peel off the speaker cover.

Step 6

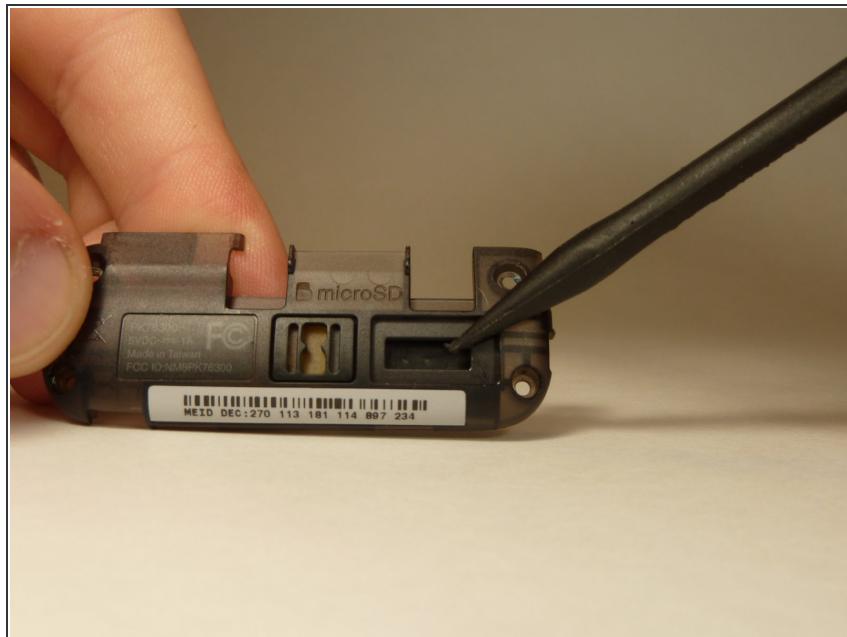

- Use the spudger to push the speaker out of its casing.

To reassemble your device, follow these instructions in reverse order.