



HTC One X Plus Antenna Replacement

This guide will be a step by step process about the replacement of the antenna.

Written By: Jason Melo



INTRODUCTION

If rebooting your device or updating the software to the latest version doesn't solve your wi-fi or bluetooth connectivity, then replace your HTC One X+ antenna.

TOOLS:

- [Tweezers](#) (1)
- [Suction Handle](#) (1)
- [Phillips #000 Screwdriver](#) (1)
- [Spudger](#) (1)
- [iFixit Opening Tools](#) (1)

Step 1 — Antenna



- Power off your device.
- Insert a pin, paper clip, or very small piece of metal into the hole next to the micro sim card holder to remove it.


(i) The Sim Card Slot is located on the top edge of the device.

Step 2



- Using plastic opening tools, pry open the bottom of the device first.
- You will hear clicking sounds as the sides of the device detach from the screen.
- Once both sides are detached use the suction cup tool to remove the screen completely from the black encasing.

Step 3

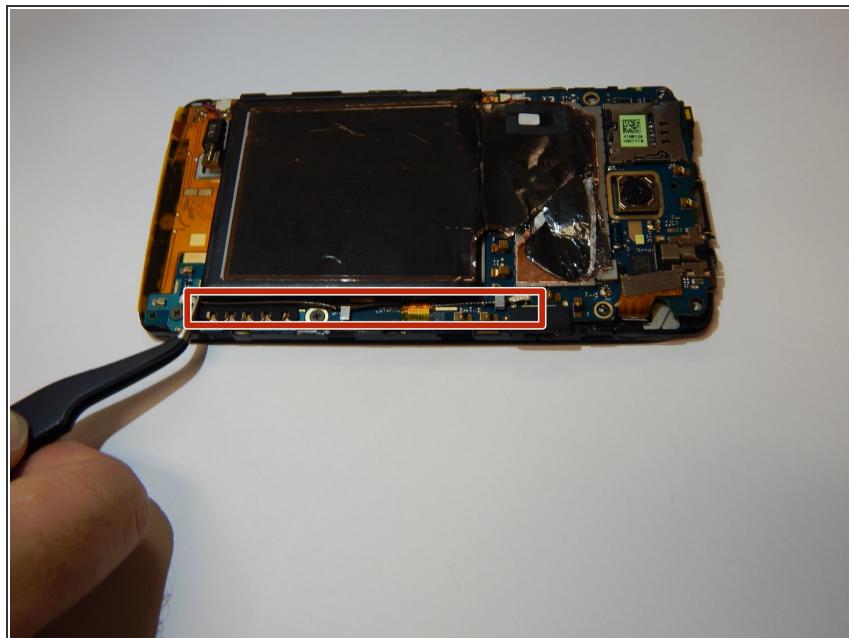

- Now that the rear panel has been removed, use metal tweezers to carefully remove the antenna.
- The antenna is the loose black wire located to the right of the battery.
- Using the tweezers, connect and install your new antenna. Ensure to place the antenna beneath the metal supports.

To reassemble your device, follow these instructions in reverse order.