



HTC Radar 4G Replacing Touch Digitizer Replacement

You will be able to successfully replace your touch digitizer with a new one.

Written By: Kevin Guerra



 **TOOLS:**

- [Spudger \(1\)](#)
- [T5 Torx Screwdriver \(1\)](#)

Step 1 — Replacing Touch Digitizer



- **Step One:** Take out four screws from the white plastic cover of the phone using the T5 screw driver.
- **Step Two:** Then take out two black screws from the silver frame.

Step 2




- **Step Three:** Then take off the backing of the phone (should slide out).

Step 3




- **Step Four:** Remove battery from phone, using a T-tool (looks like a star at the top of it).

Step 4

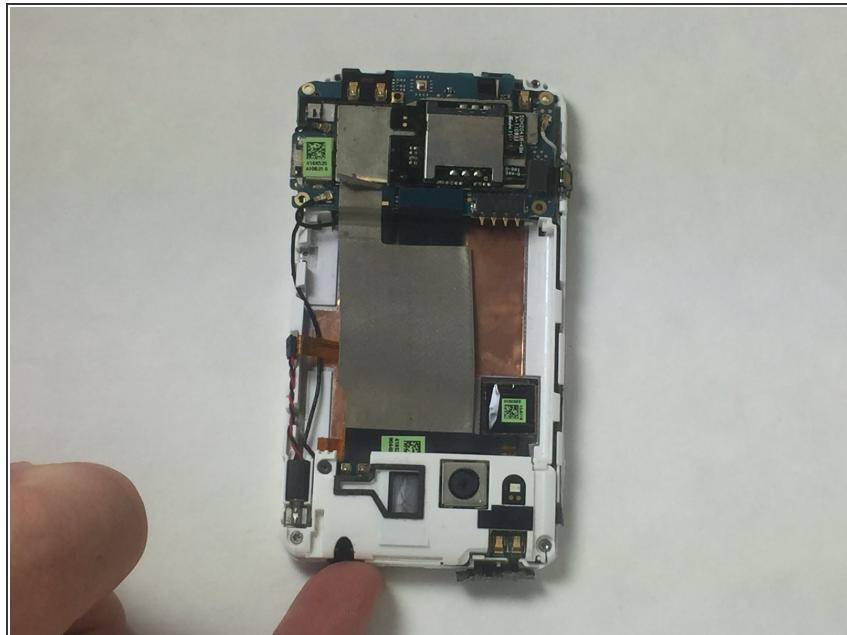

- **Step Five:** Next, remove the plastic outer ware to get to the camera, you will be removing 3 screws using the screw driver.


Step 5

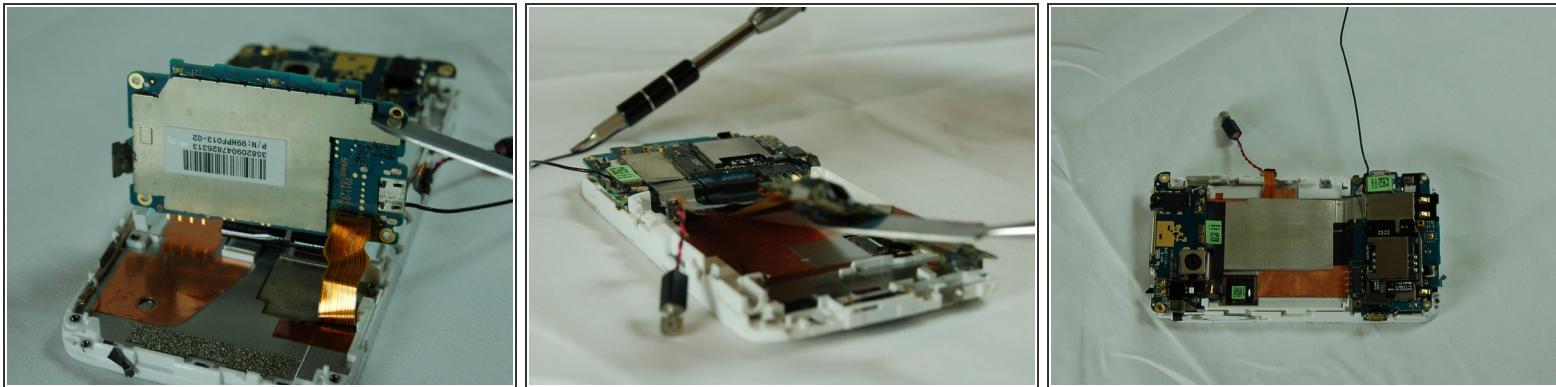

- **Step Six:** Remove upper board and mother board from phone using pry tool.

 The regular black nylon spudger should be used whenever possible, especially around motherboards.

Step 6

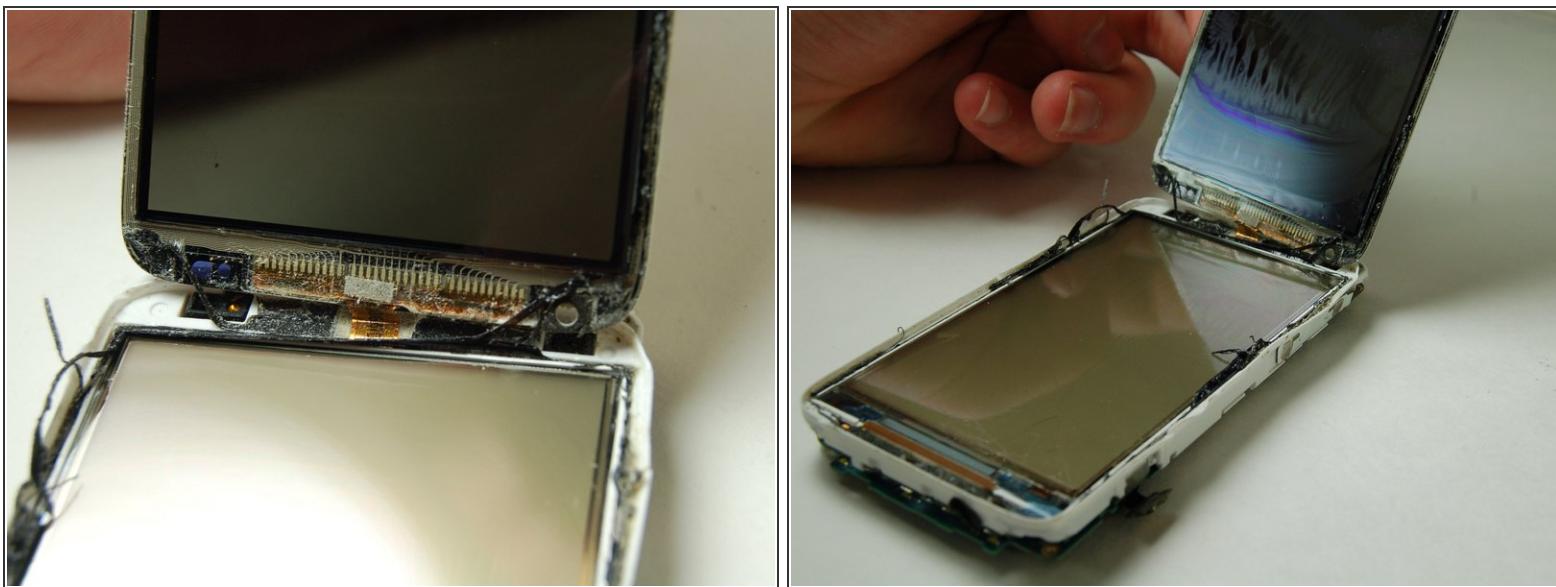

- **Step Seven:** Once boards are taken off you can now remove the touch digitizer and put the new touch digitizer.

To reassemble your device, follow these instructions in reverse order.