



HTC Touch Front Buttons Replacement

The goal of this guide is to instruct people on how to properly replace the LCD screen for the HTC Touch 6900.

Written By: Andrew Brooks



INTRODUCTION

Warning: Always be sure you are grounded whenever handling any of the circuit or logic boards.

TOOLS:

- [Phillips #00 Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)
- [T5 Torx Screwdriver](#) (1)

Step 1 — Front Buttons



- Remove the back panel by sliding it up.

Step 2



- Remove the battery.

Step 3




- Remove the 4 torx-head screws in the corners of the phone using the T5 Torx Screwdriver.

Step 4



- Use the plastic opening tool to remove the front panel from the phone.
- Unplug the front button cable from the inside of the phone.

Step 5

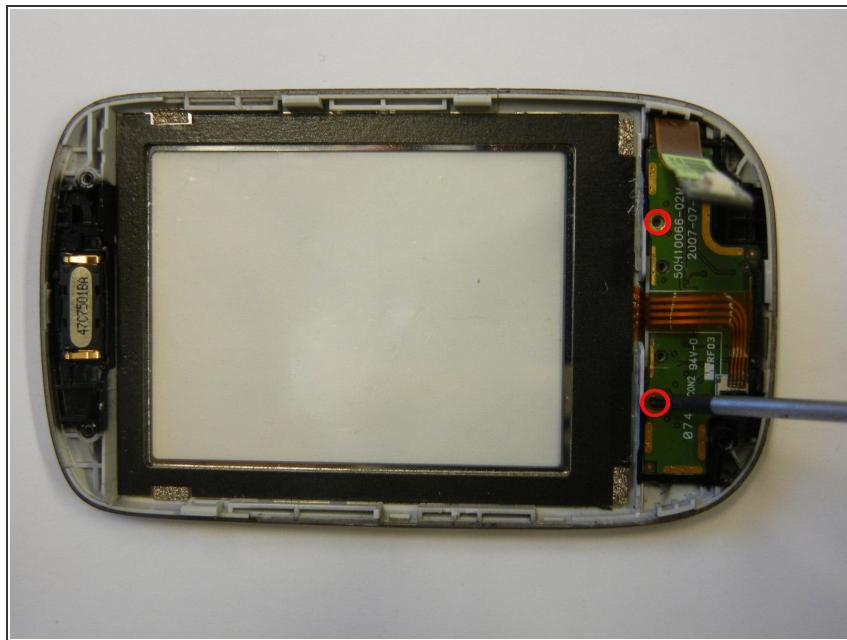

- Remove the 2 philips-head screws on the back of the front panel using the PH00 screwdriver.

Step 6



- Remove the small circuit board by gently pushing on the center button on the front of the phone.

Step 7



- Remove the buttons by pushing on them from the front side of the phone.

To reassemble your device, follow these instructions in reverse order.