




# HTC Touch Pro CDMA Screen Replacement

A step-by-step guide on how to replace the HTC Touch Pro Screen.

Written By: Zhaowei Zhang

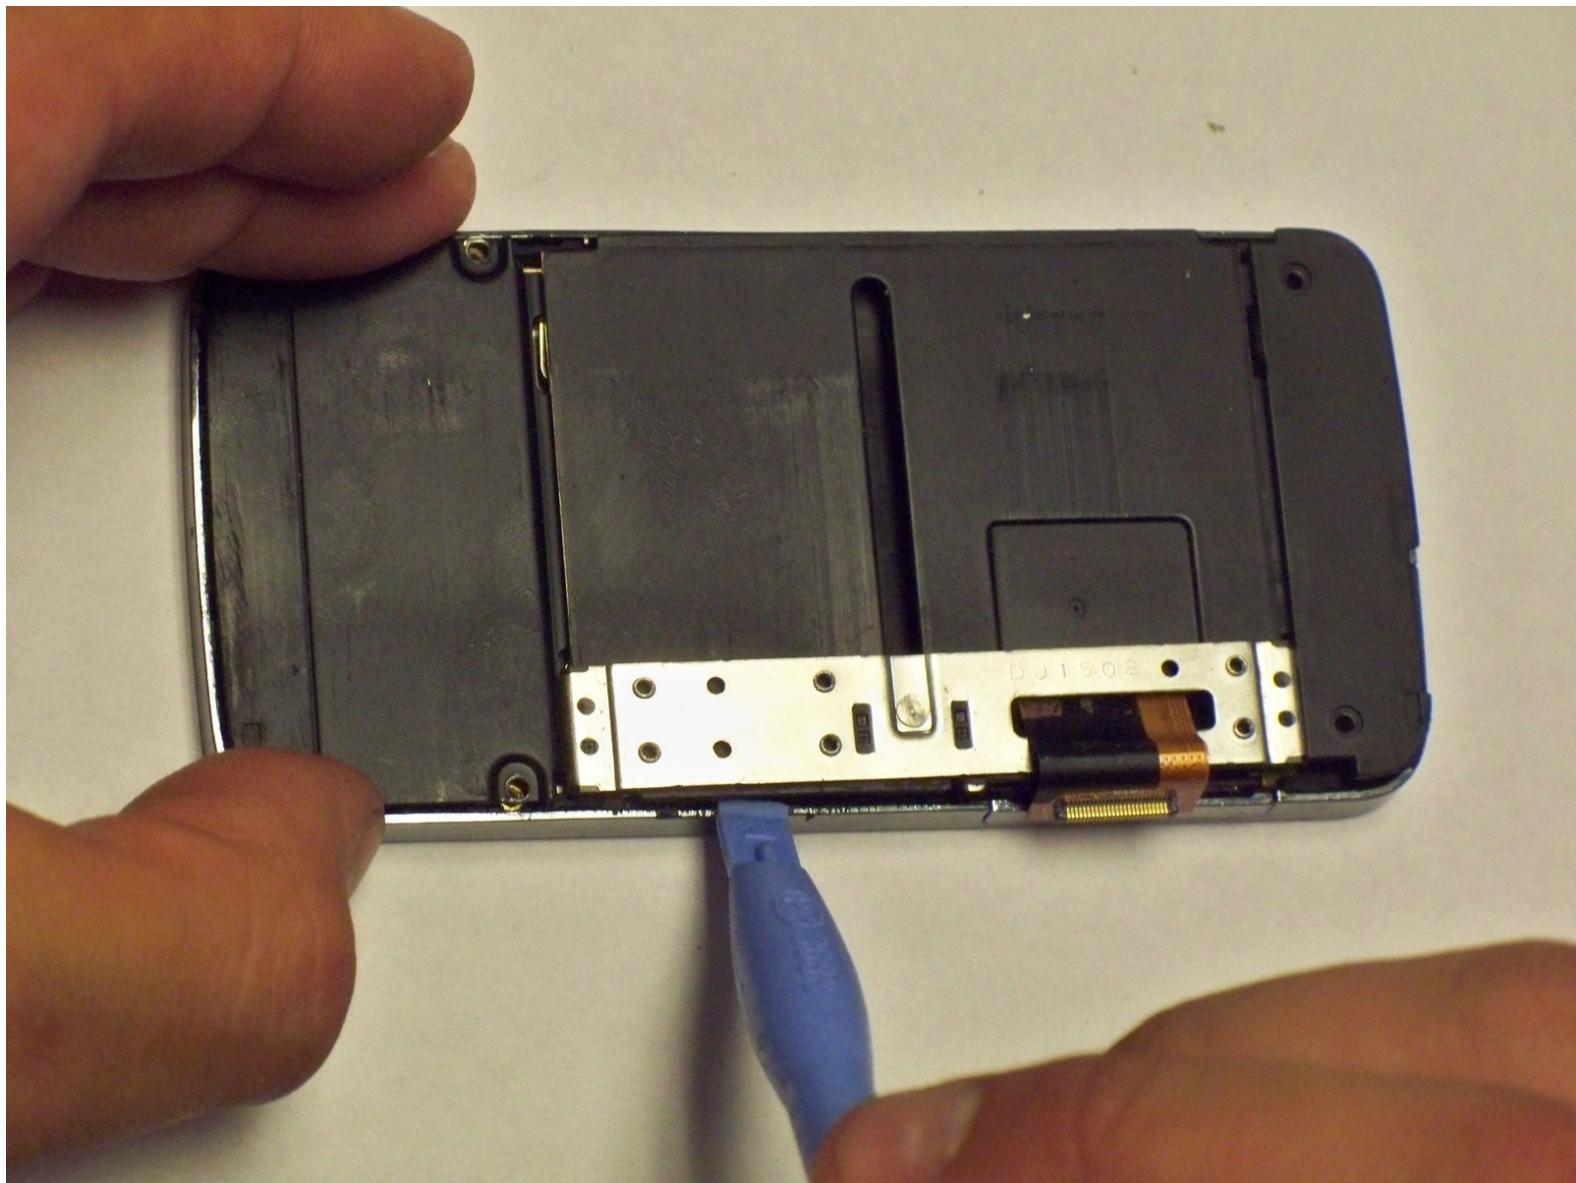

## INTRODUCTION

This easy to follow guide will show you in the ins and outs on how to repair your HTC Touch Pro.

### TOOLS:

- [Phillips #00 Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)
- [T6 Torx Screwdriver](#) (1)

## Step 1 — Battery



- First, gently press on the back plate and push down toward the camera.

## Step 2




- Use your finger to lift up the edge of the battery.

## Step 3 — USB Logic Board




- Remove the 4 screws using the T6 screw driver.

## Step 4

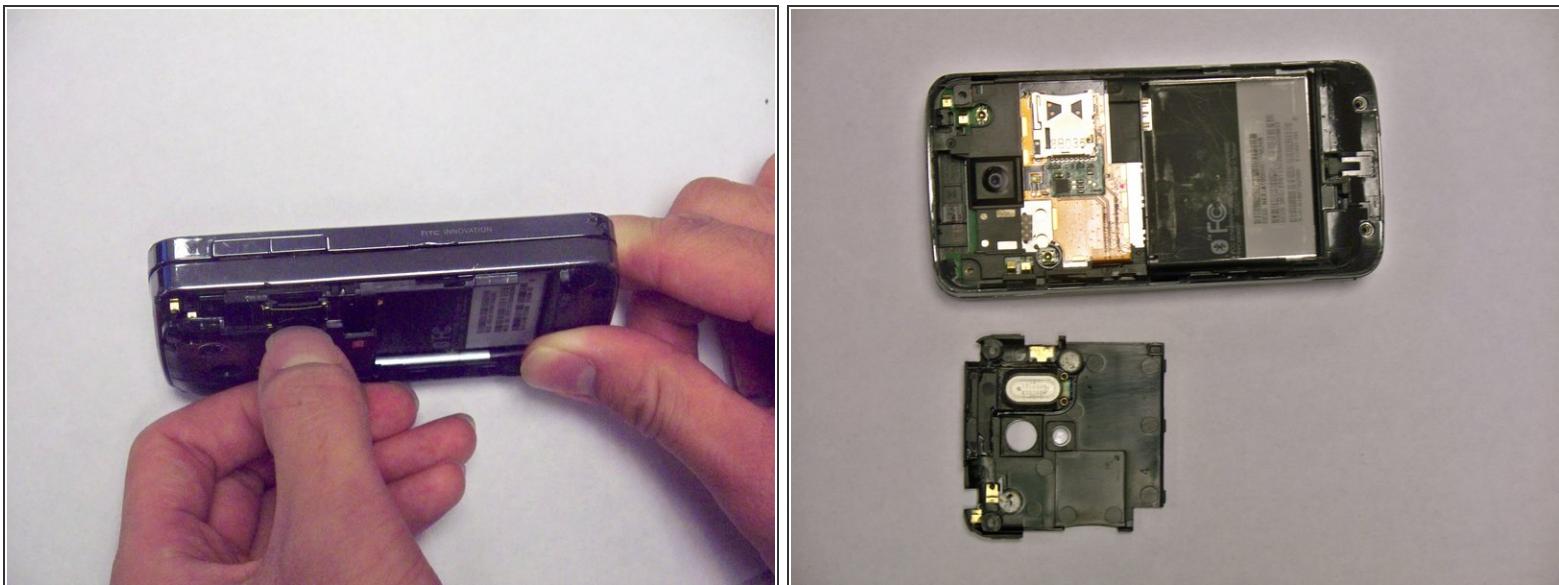


- Lift the plastic cover near the memory card slot.

## Step 5

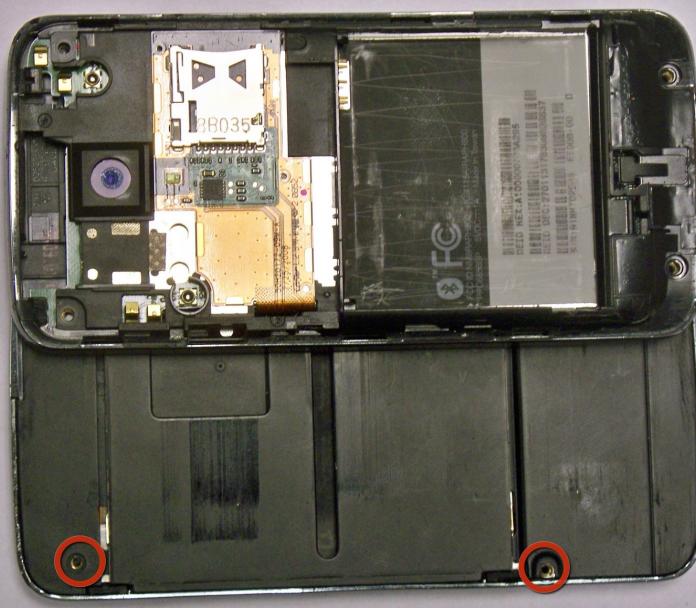



- Remove the two Phillips #00 screws from the backside of the screen.

## Step 6

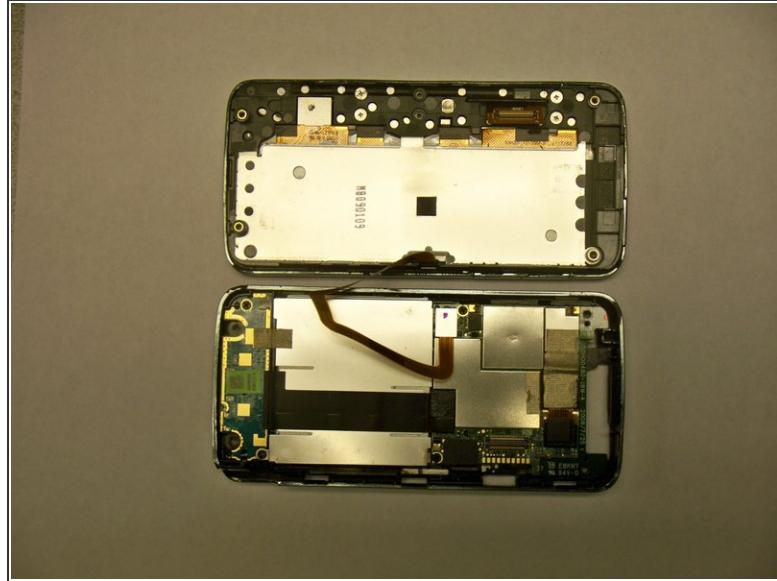



- Insert a spudger or a plastic opening tool into the seam on the side of the phone.
- Gently pry apart the two halves of the phone.

## Step 7

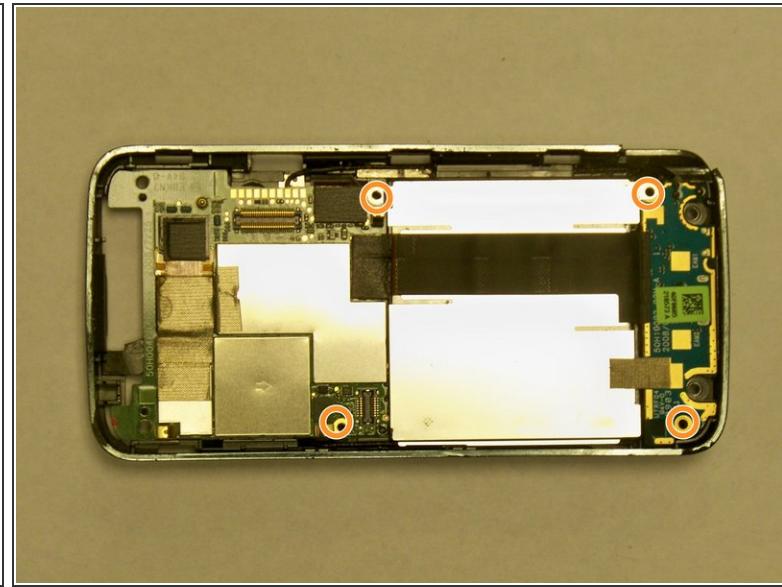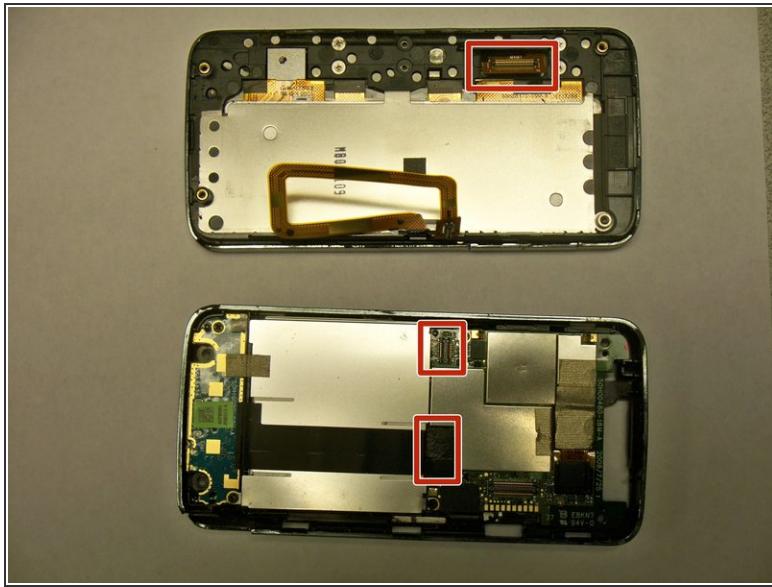

- Gently unplug the connectors.
- Remove the screws with a 00 Phillips-head screwdriver.



## Step 8

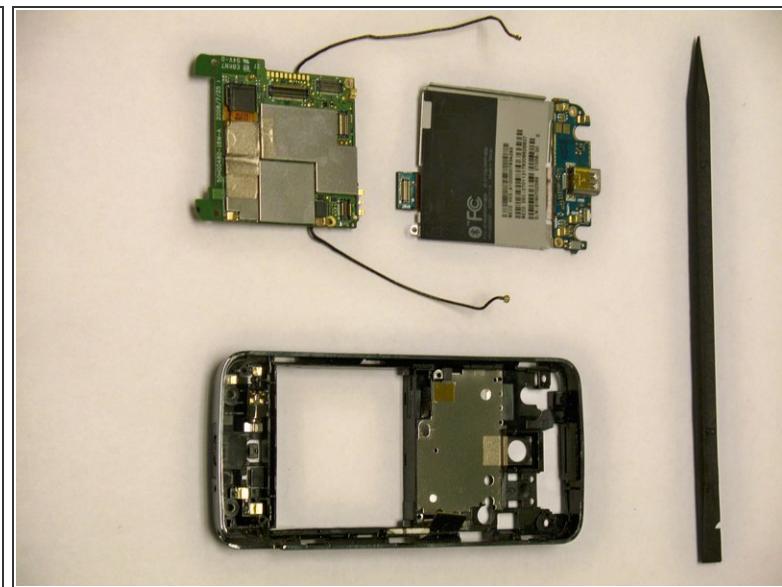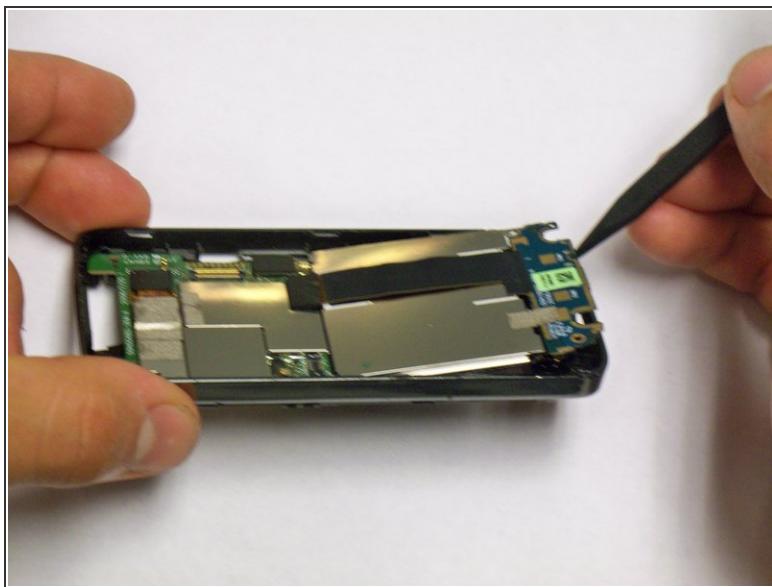

- Gently lift the motherboard up using a nylon spudger.



**⚠ BE AWARE OF THE ANTENNA.**

## Step 9 — Keyboard

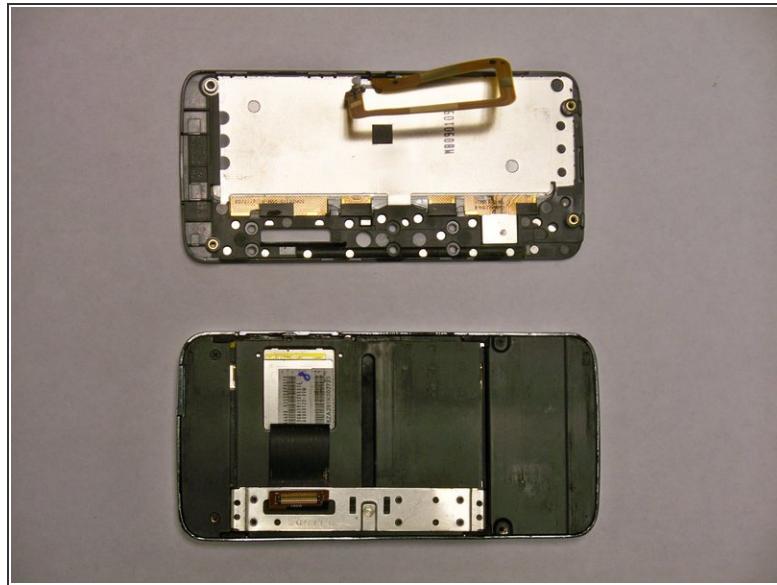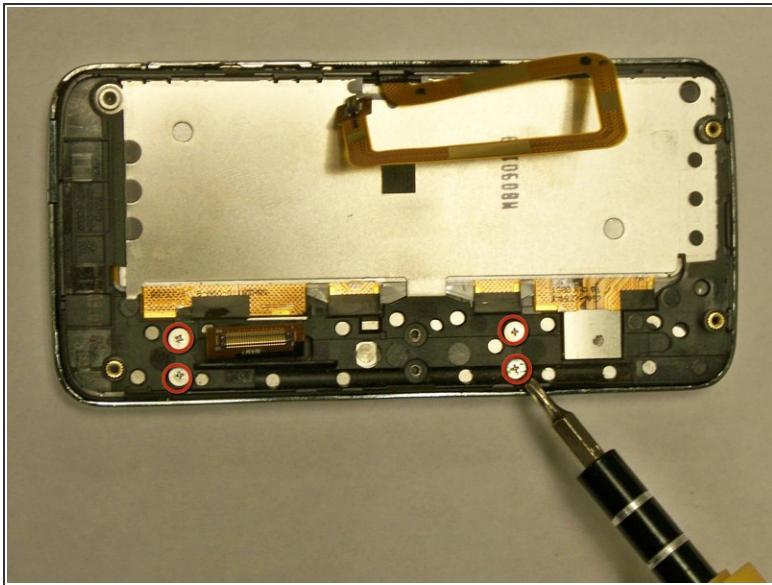


- Remove the 4 screws circled in red using a 00 Phillips-head screwdriver.

## Step 10 — Screen

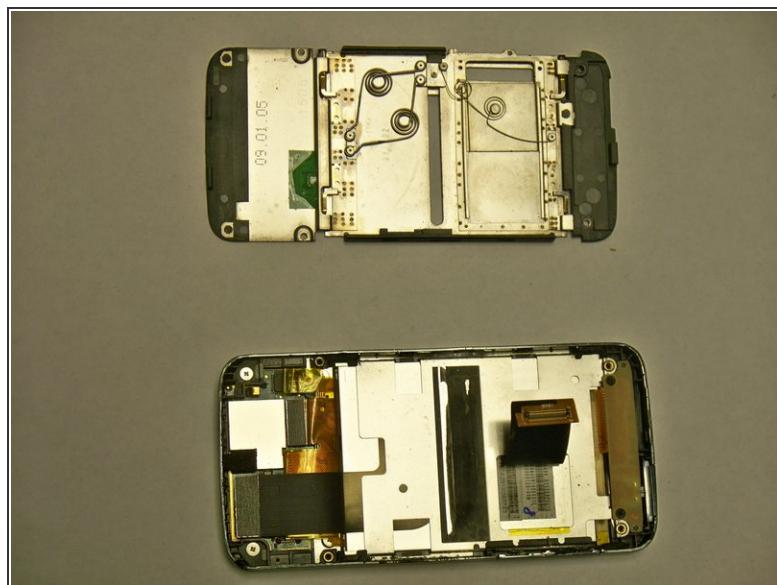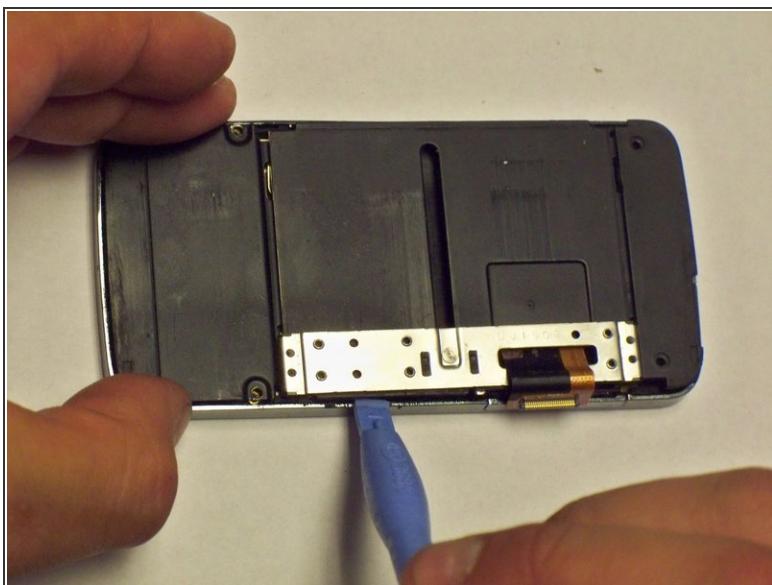

- Start by lifting the back plate of the screen by using yours finger or a plastic opener tool.

## Step 11

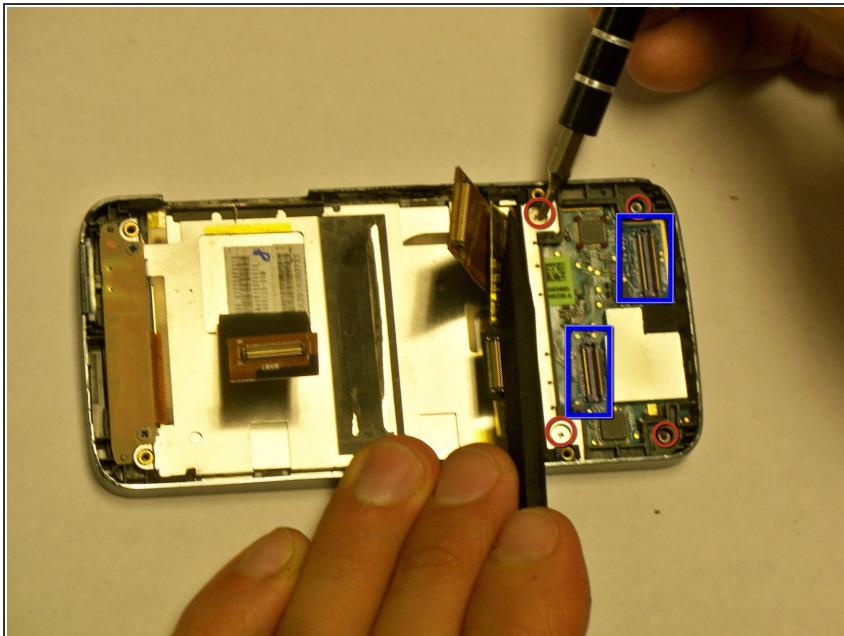

- Remove the 4 screws by using a 00 Phillips-head screwdriver.
- Gently lift the connectors.

## Step 12



- Lift the front keyboard by removing the screws with a 00 Phillips-head screwdriver.

## Step 13



- With the front keyboard removed, gently lift the screen up with a plastic opener tool and remove it.

To reassemble your device, follow these instructions in reverse order.