




HTC Touch Speaker Replacement

The goal of this guide is to instruct people how to properly replace the speaker for the HTC Touch 6900.

Written By: Andrew Brooks

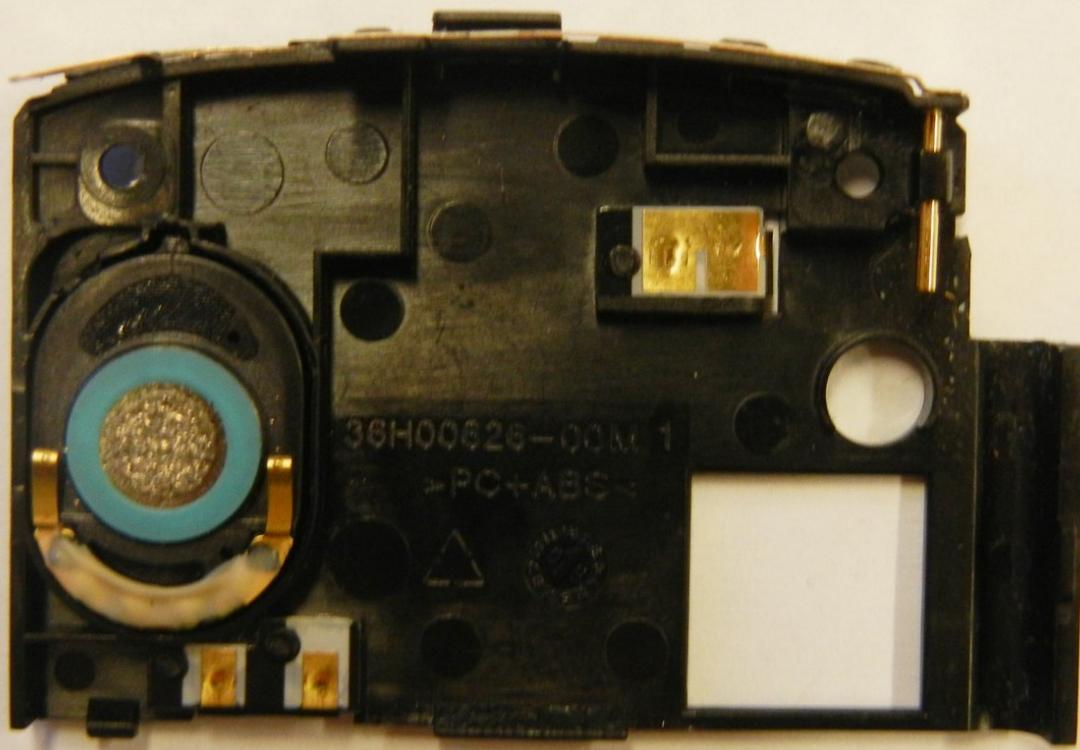

INTRODUCTION

Warning: Always be sure you are grounded whenever handling any of the circuit or logic boards.

TOOLS:

- [iFixit Opening Tools](#) (1)
- [T5 Torx Screwdriver](#) (1)

Step 1 — Speaker



- Remove the back panel by sliding up.

Step 2



- Remove the battery.

Step 3




- Remove the 2 torx-head screws located at the top corners of the phone using the T5 Torx Screwdriver.

Step 4



- Remove the plastic speaker casing above the battery slot.

Step 5

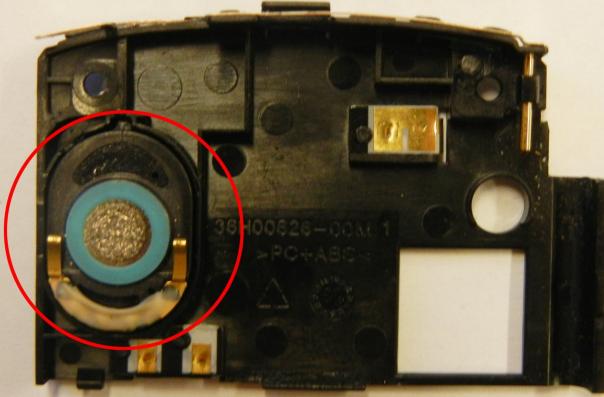

- Use the plastic opening tool to remove the speaker.

To reassemble your device, follow these instructions in reverse order.