




HTC Warhawk Screen Replacement

Disassembling the HTC Warhawk and replacing the screen.


Written By: Meuwissenm

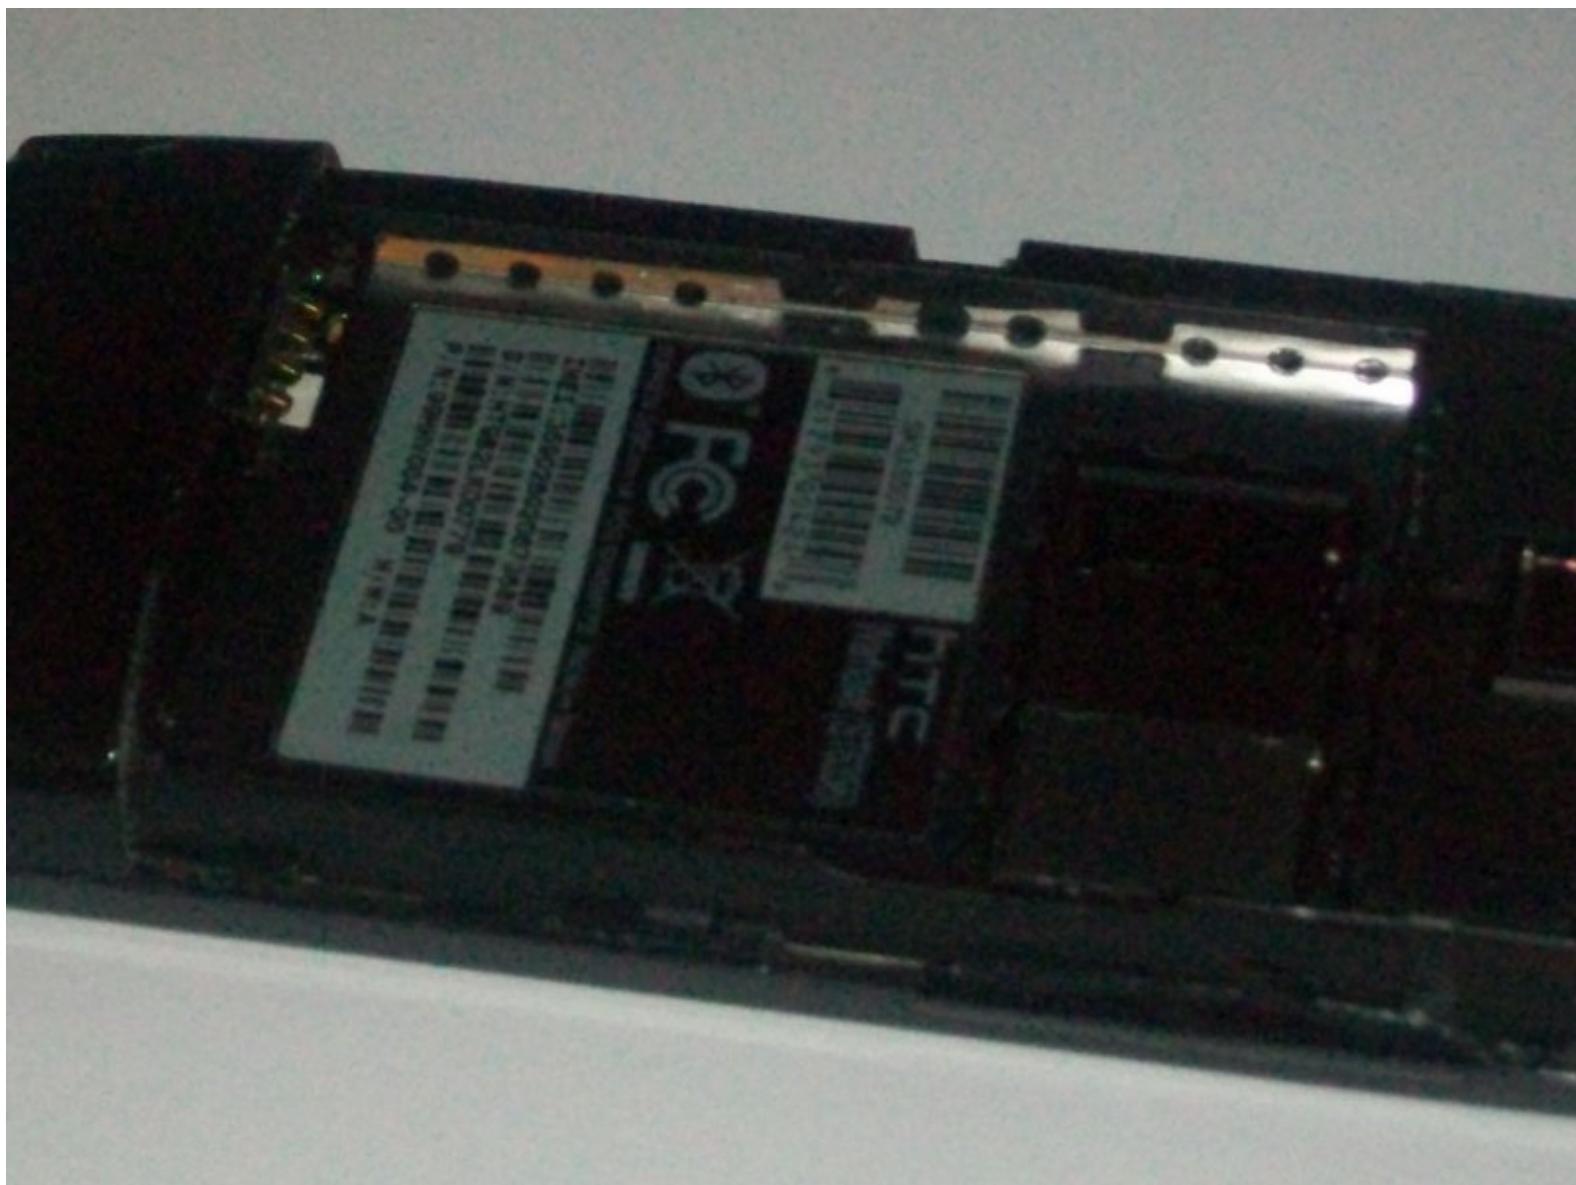

 **TOOLS:**

- [Spudger \(1\)](#)
- [T5 Torx Screwdriver \(1\)](#)

Step 1 — Screen

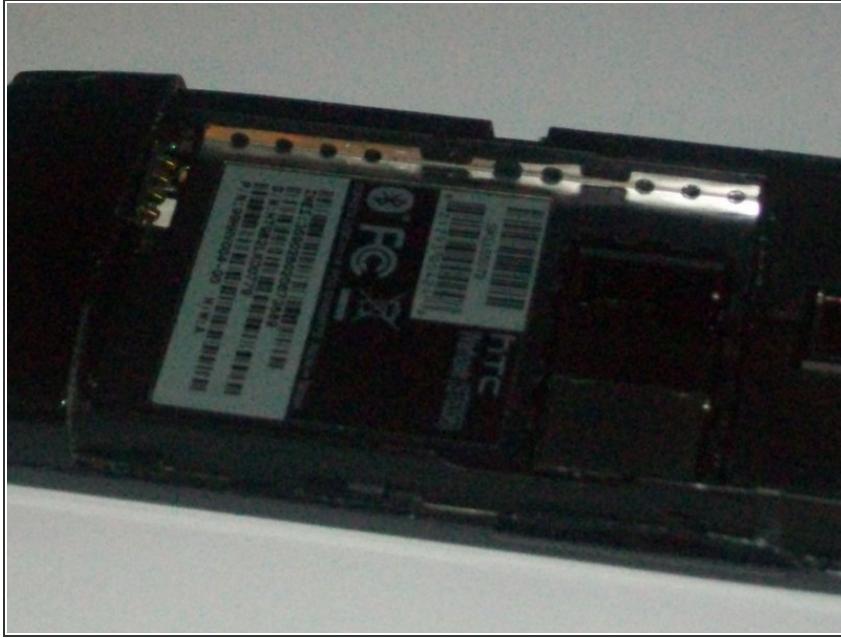

- Take the back cover off the phone and take the battery out.

Step 2



- Take a SL#2.5 screwdriver and pop the black piece off shown here.

Step 3




- Take a T5 screwdriver and unscrew the two screws seen here

Step 4




- Unscrew the two screws on the back of the phone with a T5 screwdriver

Step 5

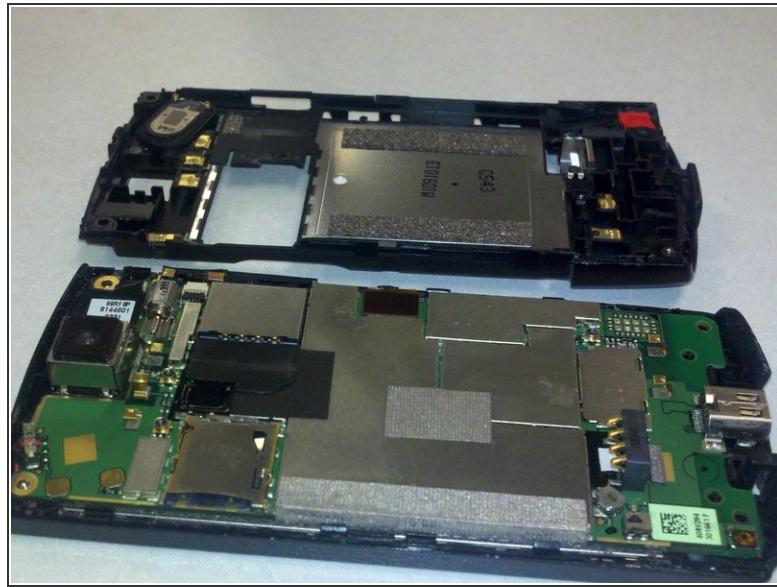


- Take the SL#2.5 screwdriver and pry off the back cover
- The phone should now look like the second picture

Step 6

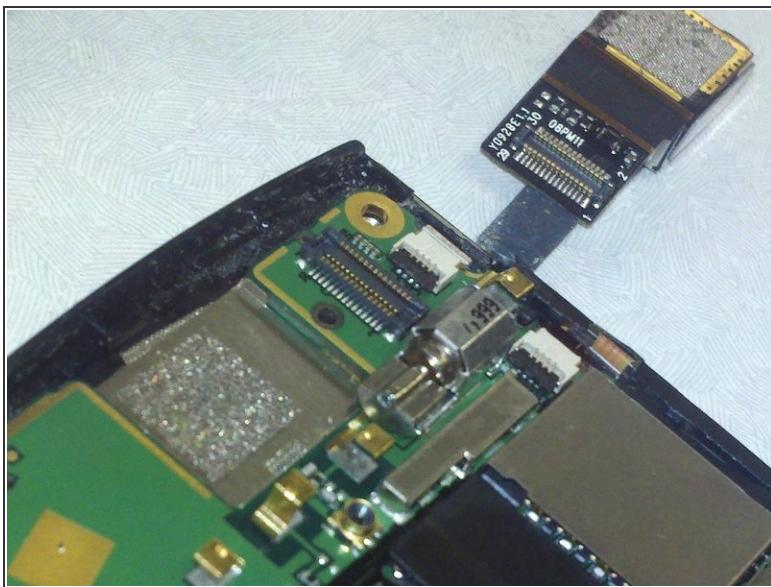


- Next lift up the camera lens from the board.
- Then pry off the circuit circled in red on the second picture

Step 7

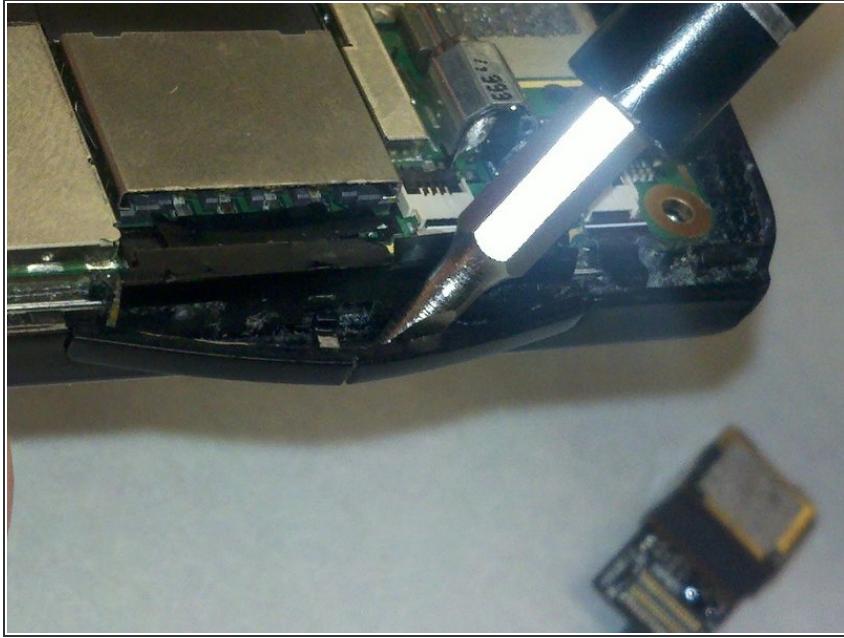

- Take the SL#2.5 screwdriver and pry off the volume buttons on the side of the phone
- The circuit board should now be detached from the LCD part of the phone

Step 8

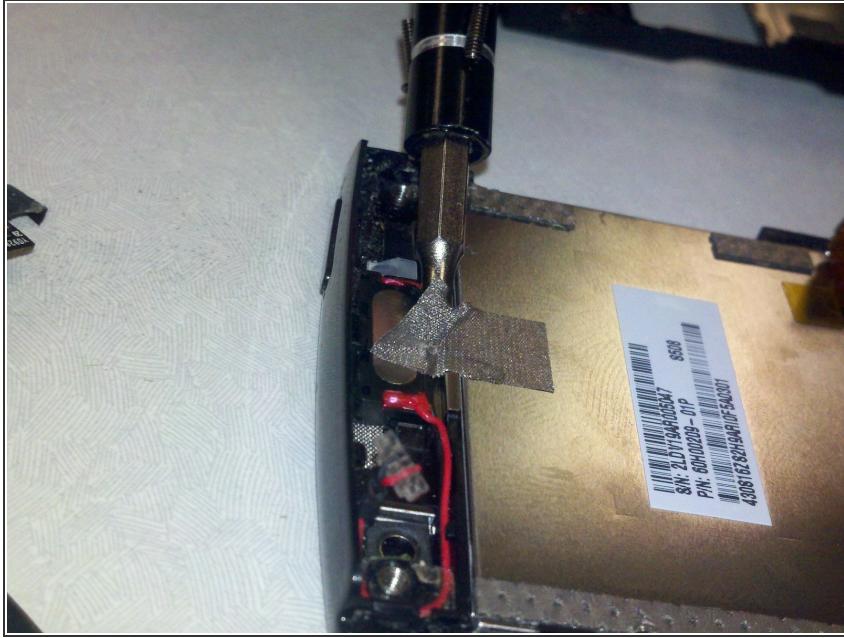

- Next take the SL#2.5 screwdriver and pry the grey fabric sticker off on the LCD side of the phone

Step 9



- Next take the SL#2.5 screwdriver and pry the screen from the front plastic cover
- The screen should come out with ease and be completely detached from the rest of the cover.

Step 10



- Replace screen with a new one.

To reassemble your device, follow these instructions in reverse order.