




HTC Wizard 200 Camera Flash Replacement

Installation of the camera flash on the HTC Wizard 200.

Written By: Kyle Champ

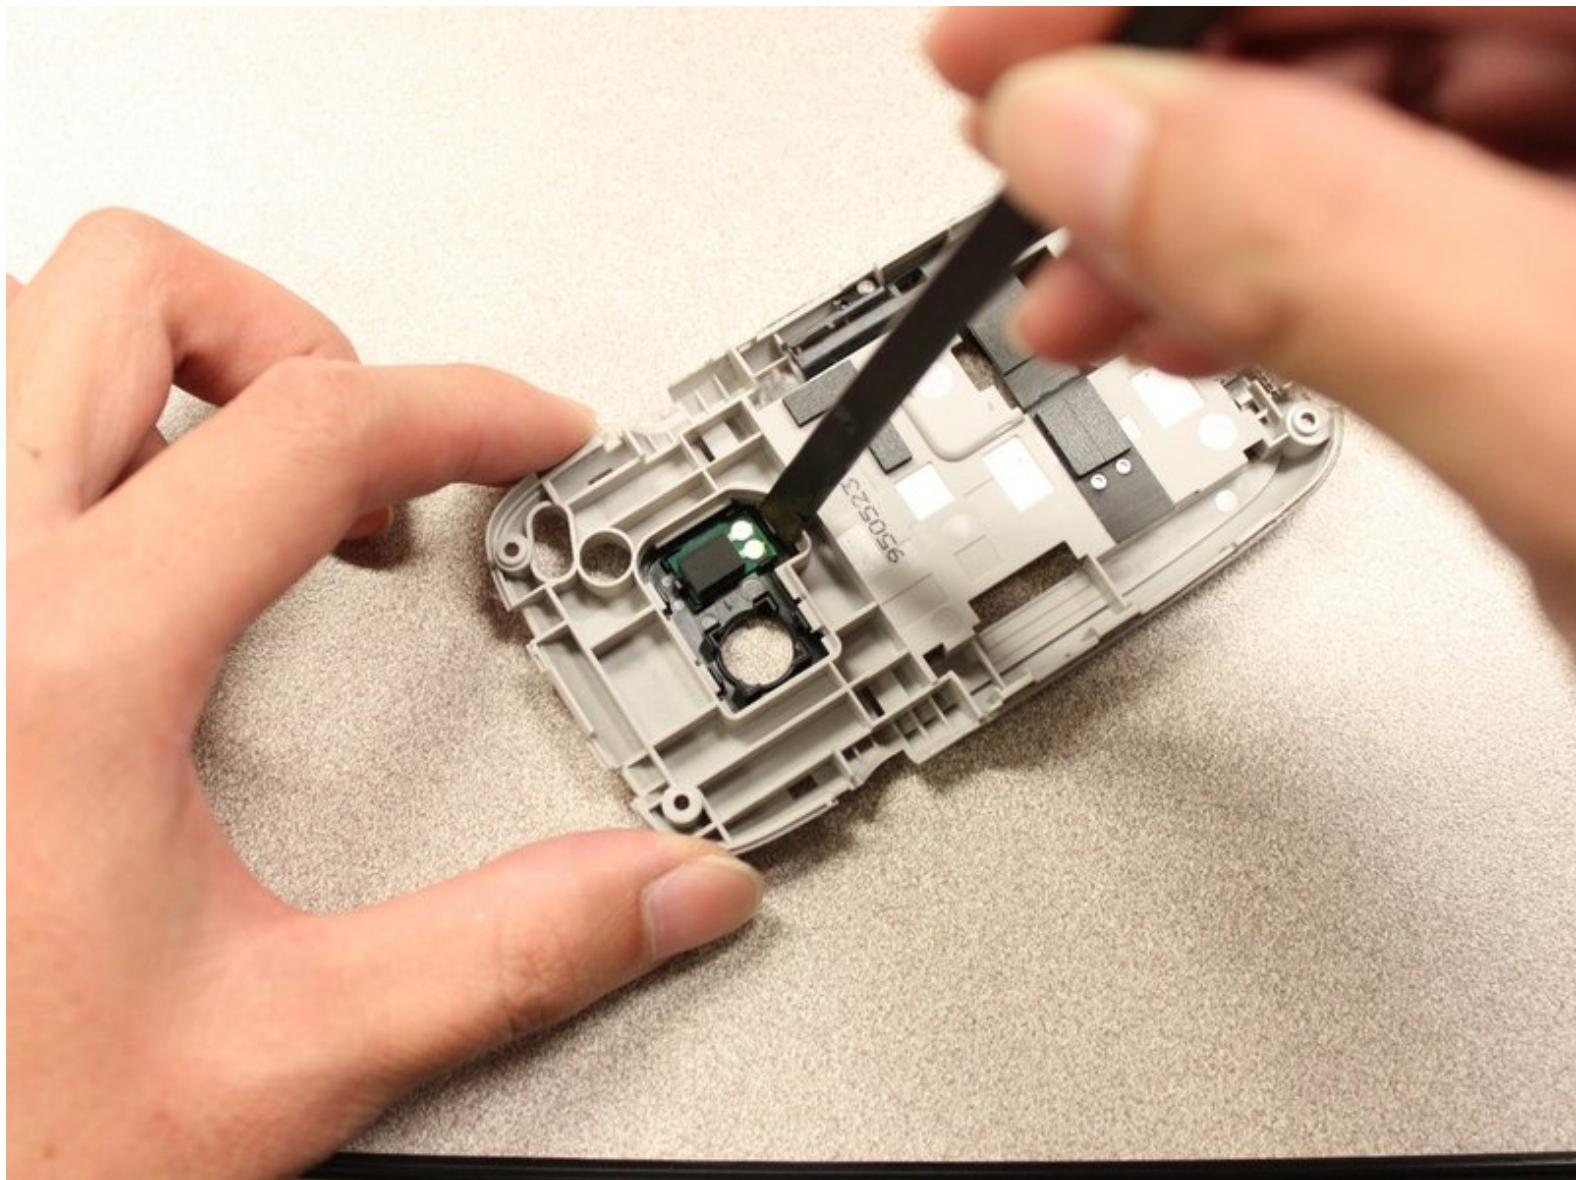

INTRODUCTION

This guide will explain how to install / remove the camera flash on the HTC Wizard 200.

TOOLS:


- [iFixit Opening Tools](#) (1)
- [Spudger](#) (1)
- [T5 Torx Screwdriver](#) (1)

Step 1 — Battery



- Remove the back case with your fingernail to expose the battery. (Not shown in picture)
- Pull the black tab to remove the battery.

Step 2 — Back Panel

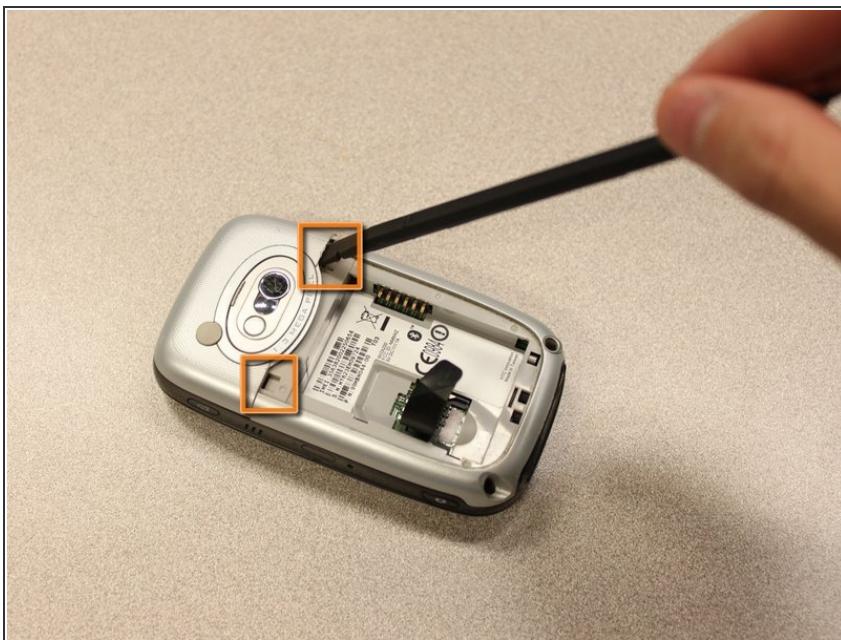


- Use a spudger to begin removal of the camera cover by inserting the flat end into the two notches and gently pry them up one at a time.

Step 3



- Work the spudger around the edge of the camera cover to release the clips.

Step 4

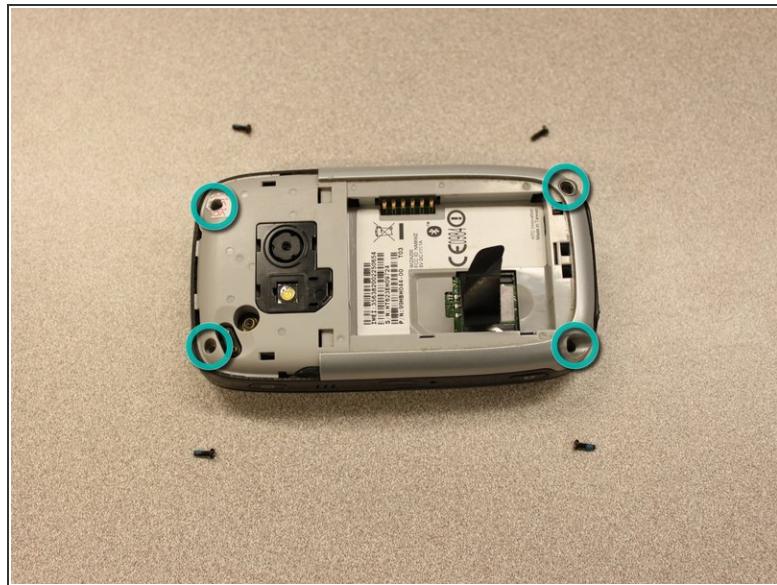

- Use a [T5 Torx screwdriver](#) to remove four 6mm screws that secure the back panel to the main body.
- (i)* There is a screw under the "void" sticker.

Step 5



(i) Device rotated 180 degrees.


- Insert the flat end of a spudger into the crack between the front and rear cover.
- Once you have enough of a gap to fit a plastic opening tool into it, use the opening tool to release the clips.

Step 6




- Use the plastic opening tool to continue releasing the clips until you have worked your way around the edge.

Step 7

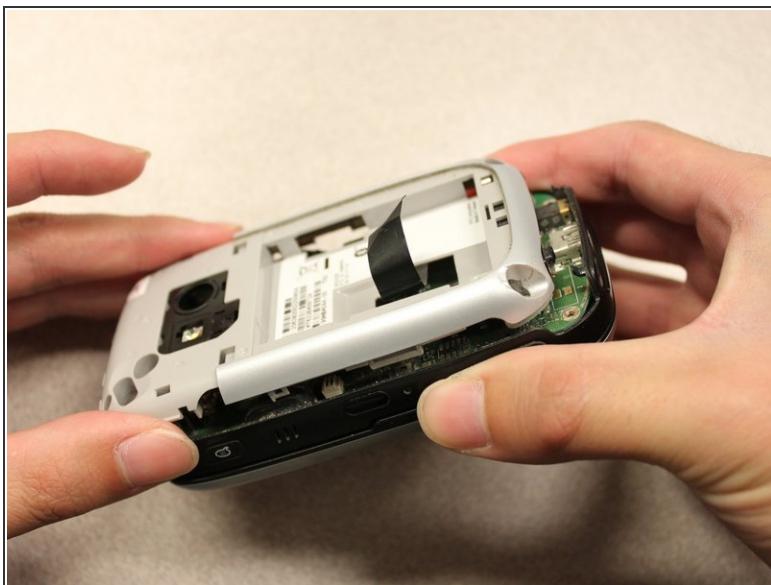

- Pull off the back case panel.

Step 8 — Camera Flash

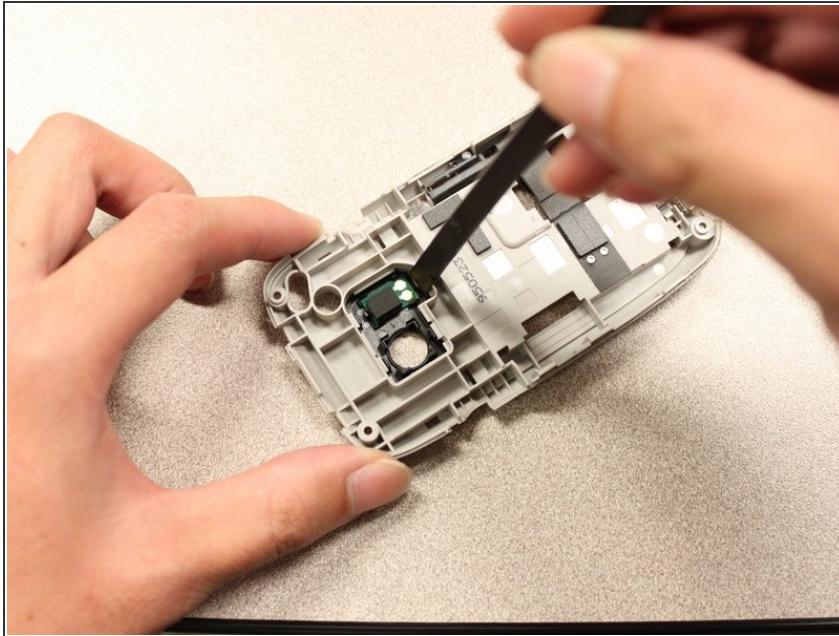

- Use the spudger to pry out the camera flash module.

To reassemble your device, follow these instructions in reverse order.