



Hamilton Beach 51101BA Power Cord Replacement

After completing this guide you will have replaced the power cord to the blender.

Written By: Andrew Huff




INTRODUCTION

In this guide you are going to learn how to take out the current power cord in order to replace it with a new one.

TOOLS:

- [Flush Wire Cutters](#) (1)
- [Soldering Iron](#) (1)
- [Phillips #2 Screwdriver](#) (1)

Step 1 — Power Cord

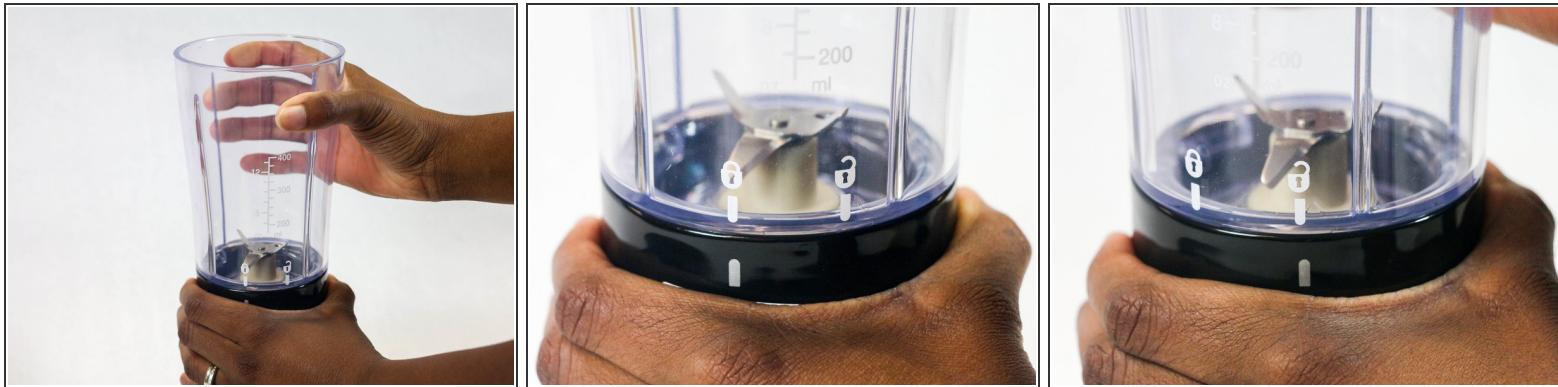

- Remove container from base.
- Hold the blender and the container, then twist the container in a clockwise motion.
- *(i)* Make sure to follow the lock and unlock markings on the container.

Step 2



- Turn the blender so the bottom is facing you.
- Using a Phillips #2 screwdriver, remove the two 5 mm Phillips screws from the base.

Step 3



- Lift the two wires from the motor platform.

Step 4



- Using the wire cutters, cut the end of the thick black wires.

To reassemble your device, you must solder the new power cord to the thin black and thin gray wires, and follow the steps in reverse order. Requires soldering skills.

