



Handspring Visor Deluxe PDA Motherboard and Memory card I/O Replacement

How to install a new motherboard and memory card I/O into the Handspring Visor Deluxe PDA.

Written By: David Faltemier



INTRODUCTION

Use this guide to replace the Motherboard.

TOOLS:

- [Phillips #00 Screwdriver](#) (1)
- [Spudger](#) (1)
- [Tweezers](#) (1)

Step 1 — Outside cover and stylus



- Remove the outer screen cover by releasing the top clip from the main body of the device.

Step 2



- Pull out the stylus from the top right corner of the device.

Step 3




- Slide the memory cartridge cover up and off the device.

Step 4 — Batteries



- Remove the battery cover by releasing the clip from the main body of the device.

Step 5

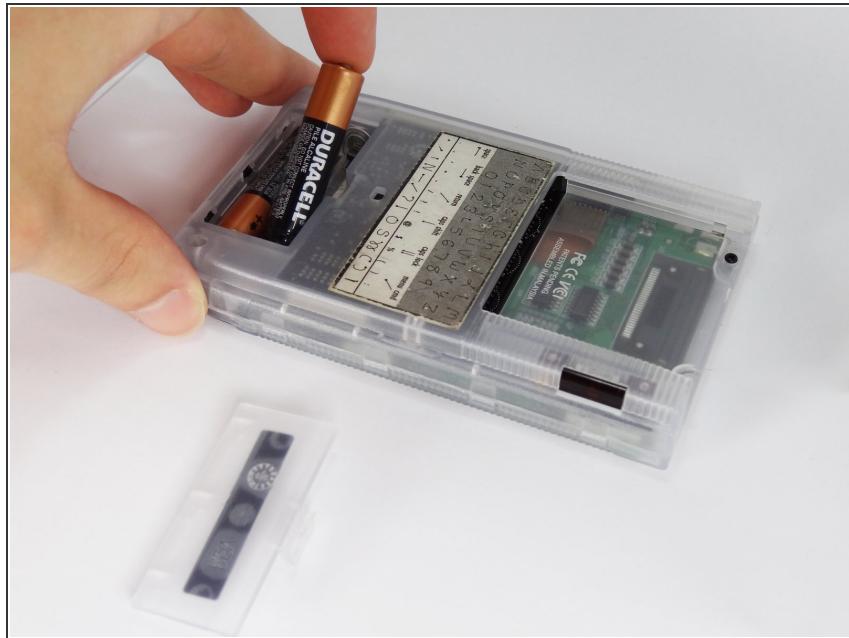

- Remove the batteries from the device.


Step 6 — Back Cover



- Unscrew the four 2.94mm screws with a #00 Phillips screwdriver.

i One end of the OEM stylus can unscrew and contains a mini #00 Phillips screwdriver.

Step 7

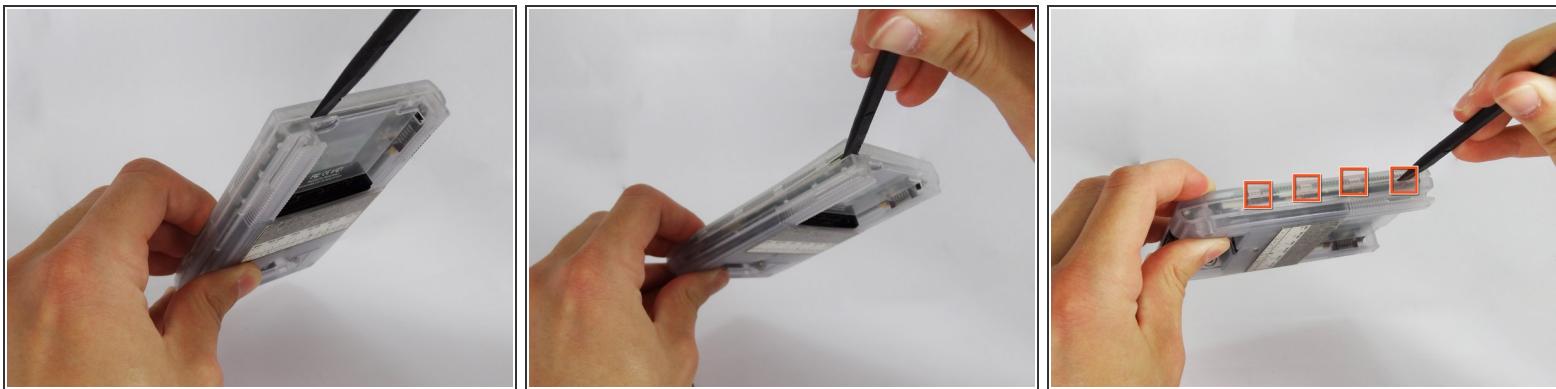

- Use the spudger to pry open the casing by applying pressure at 4 clips on both sides of the device.


 Be careful while opening the casing as there is a flex strip connecting the two halves.

Step 8




- Disconnect the flex strip from the motherboard with tweezers.

Step 9 — Button Pad and Battery Terminal

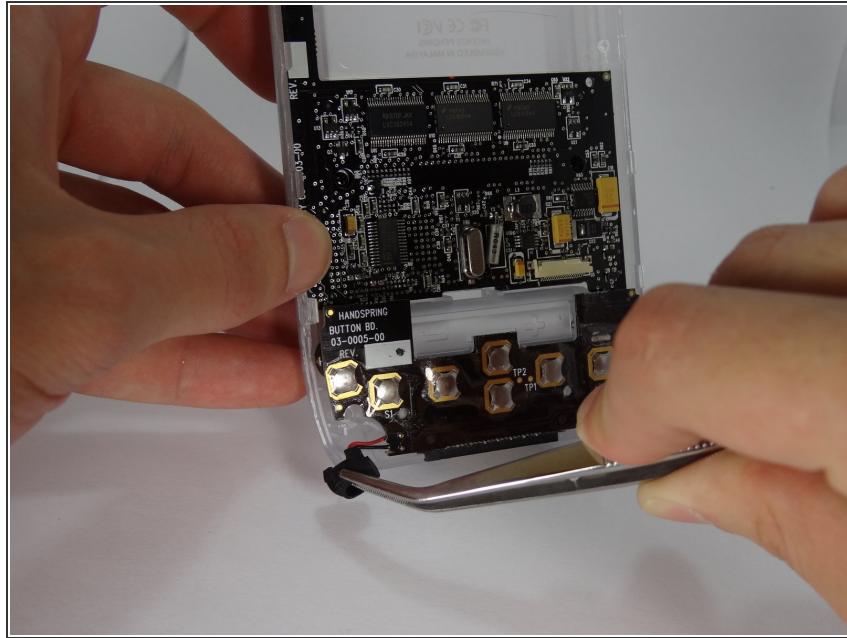


- Use tweezers to remove the power button from the back case.

Step 10

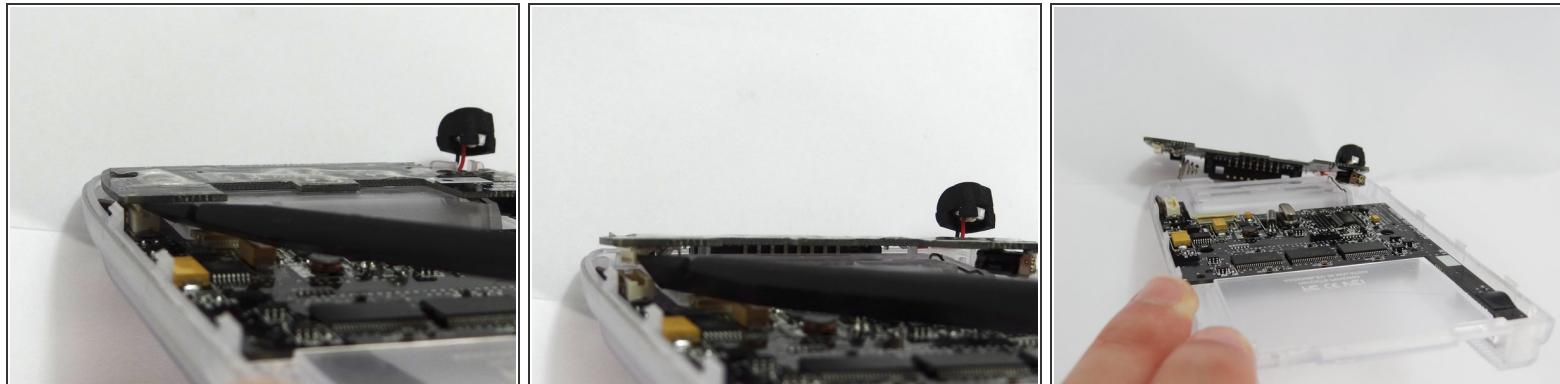

- Disconnect the button pad by using the spudger to pry it off the motherboard.
- Remove the button pad.

Step 11 — Motherboard and Memory card I/O

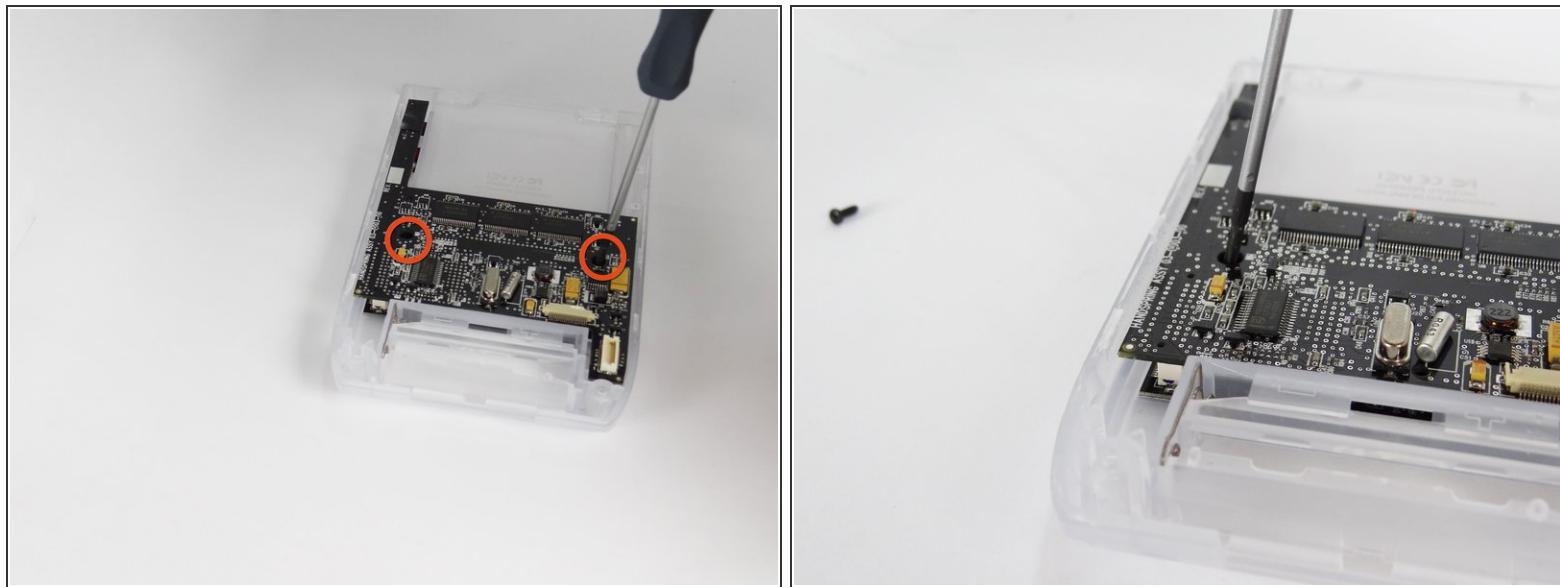

- Unscrew the two 2.94mm Phillips #00 screws that hold the motherboard in place.

Step 12



- Use the spudger to lift the motherboard from the case.

To reassemble your device, follow these instructions in reverse order.