



Handspring Visor Edge Back Panel Replacement

This guide will show you how to remove the back cover.

Written By: Nick Lazarakis




INTRODUCTION

The only tool needed is a #00 Phillips Screw driver.

TOOLS:

- [Phillips #00 Screwdriver](#) (1)

Step 1 — Back Panel

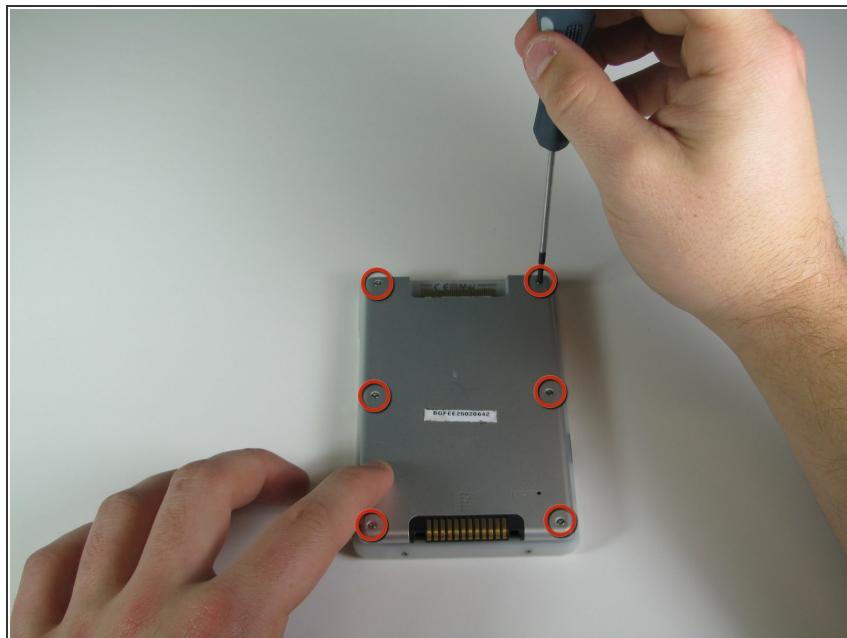

- Remove the six 4.1 mm Phillips screws from the back plate using the #00 Phillips Screwdriver.

Step 2




- Remove the black plate from the PDA.

Step 3




- Remove four 2.6 mm Philips screws that are on the sides of the frame.
- Remove the remaining 3.9 mm Philips screw holding together the stylus holster and the frame.

Step 4

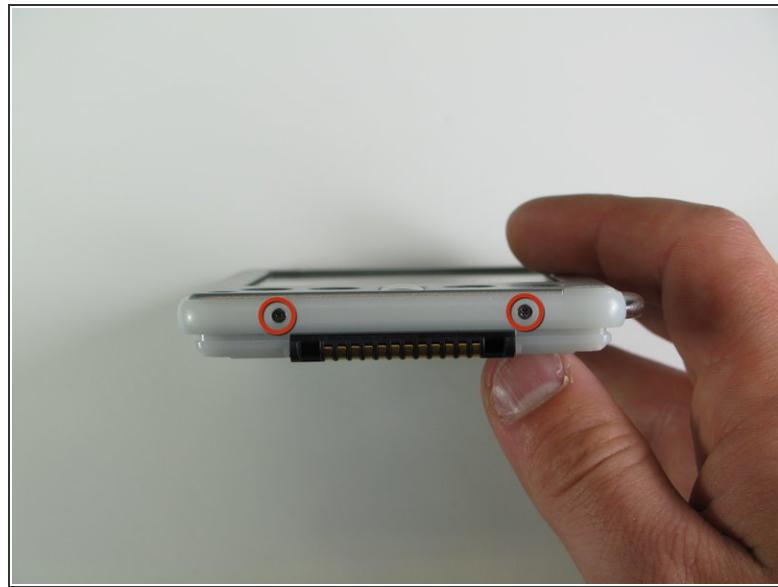

- Remove the four 2.6 mm Philips screws on the top and bottom of the frame.

Step 5

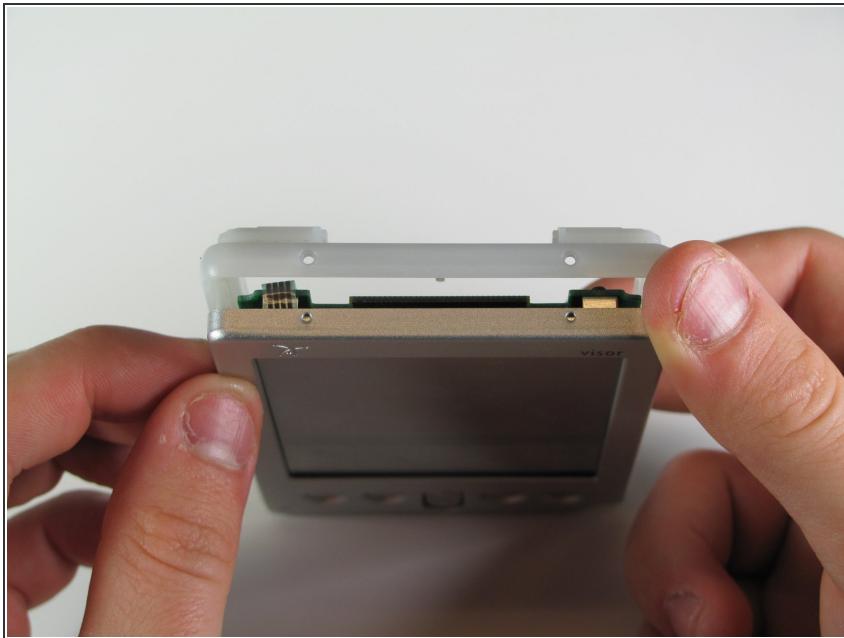

- Remove the white frame from the PDA.

⚠ The frame may get stuck on the corners so be very gentle when working the corners off.

To reassemble your device, follow these instructions in reverse order.