




Hannspree SN12E2 Hard Drive Access Door Replacement

How to remove the Hard Drive Access Door in your Hannspree SN12E2.

Written By: Brianna Johnson

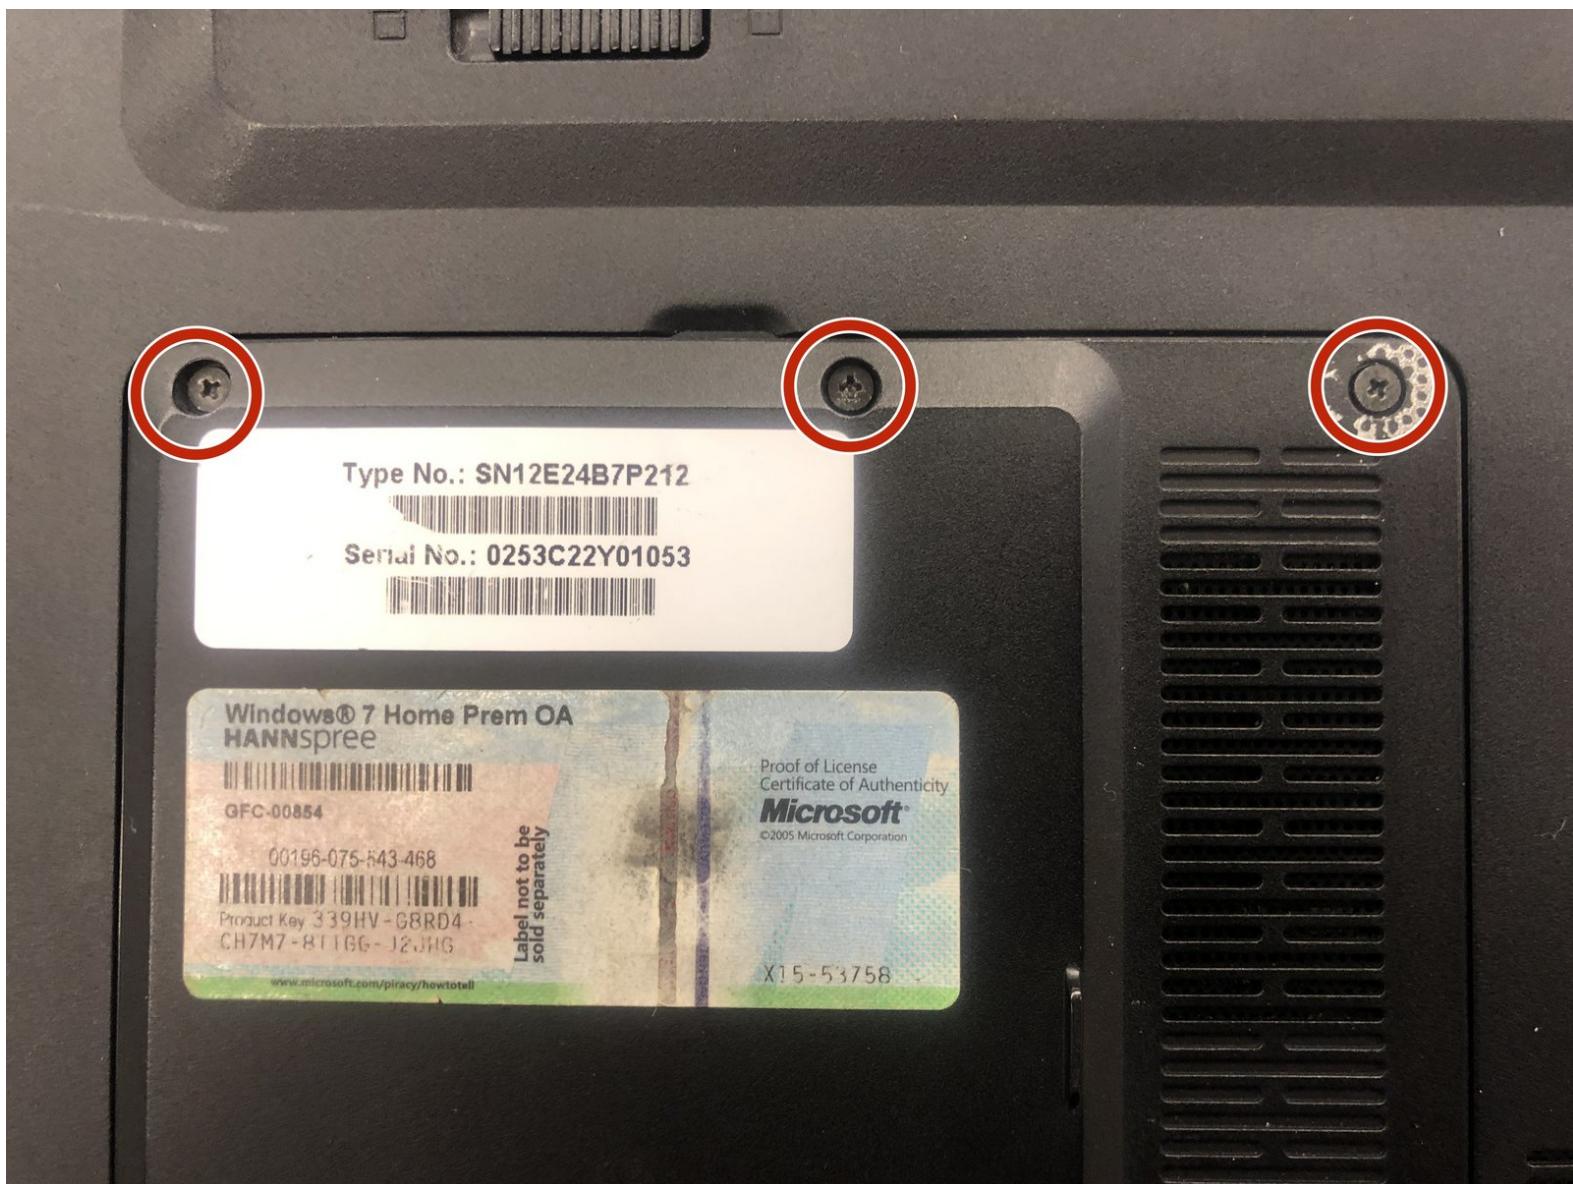

INTRODUCTION

This guide will walk you through removing the Hard Drive Access Door. Through this guide you will be able to gain access to the components that may need replacing below the Hard Drive Access Door.

TOOLS:


- Phillips #0 Screwdriver (1)

Step 1 — Battery



- Unplug and power off your laptop.

Step 2

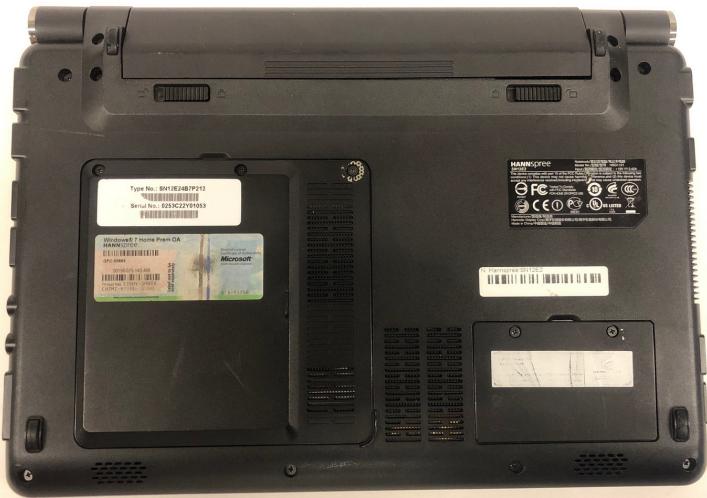


- Close your laptop .
- Place your laptop face down on a flat surface.

Step 3




- Unlatch the lock on the top right of your laptop first.
- You will need to pull on the lock on the left side and remove the battery at the same time
- The left lock is a spring lock and needs constant pressure applied in order to stay open.

Step 4 — Hard Drive Access Door

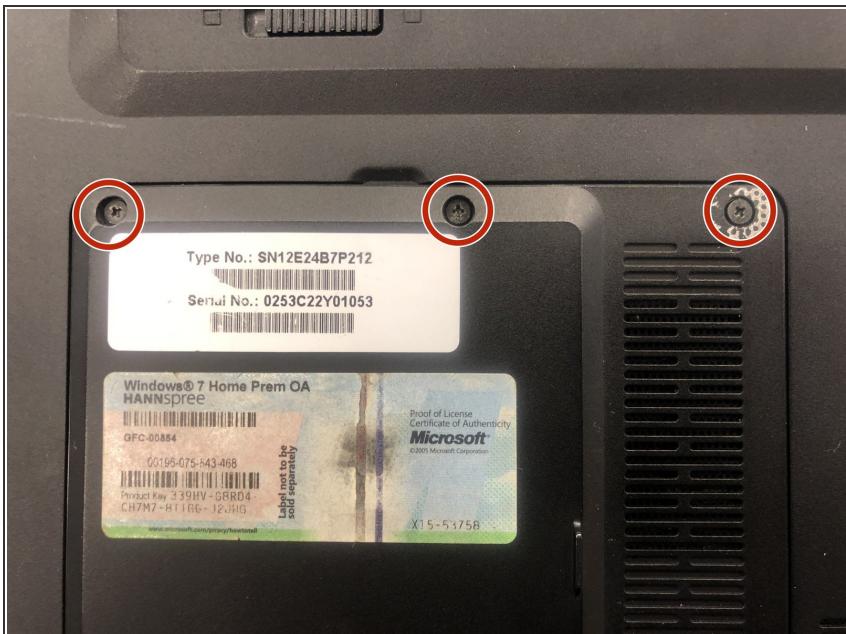

- Remove the three 3mm Phillips #0 screws.

Step 5

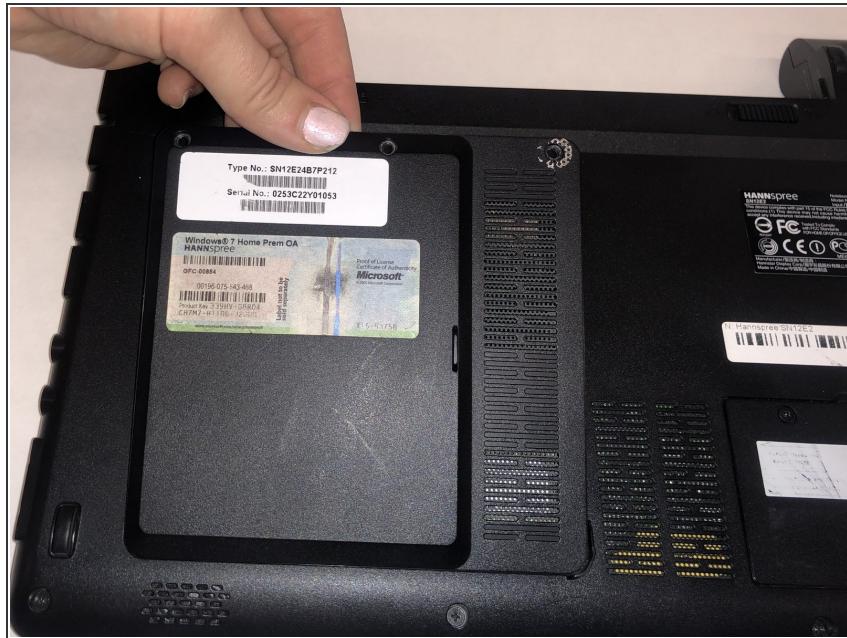

- Gently pull on the access panel to remove it.

To reassemble your device, follow these instructions in reverse order.