



Hipstreet Equinox 2 Battery Replacement

Follow the steps in this guide to replace the battery in your tablet.

Written By: Brandon Snodgrass



INTRODUCTION

After years of service your battery may be weak or no longer hold a charge. This guide replaces your battery with a new one.

TOOLS:

- [Spudger \(1\)](#)
- [Soldering Iron \(1\)](#)
- [Phillips #00 Screwdriver \(1\)](#)
- [iFixit Opening Tools \(1\)](#)

Step 1 — Rear Case




- Remove the two 3mm screws using a PH00 screwdriver.

Step 2



- Use the blue plastic opening tool to gently pry the back case off.

Step 3 — Battery

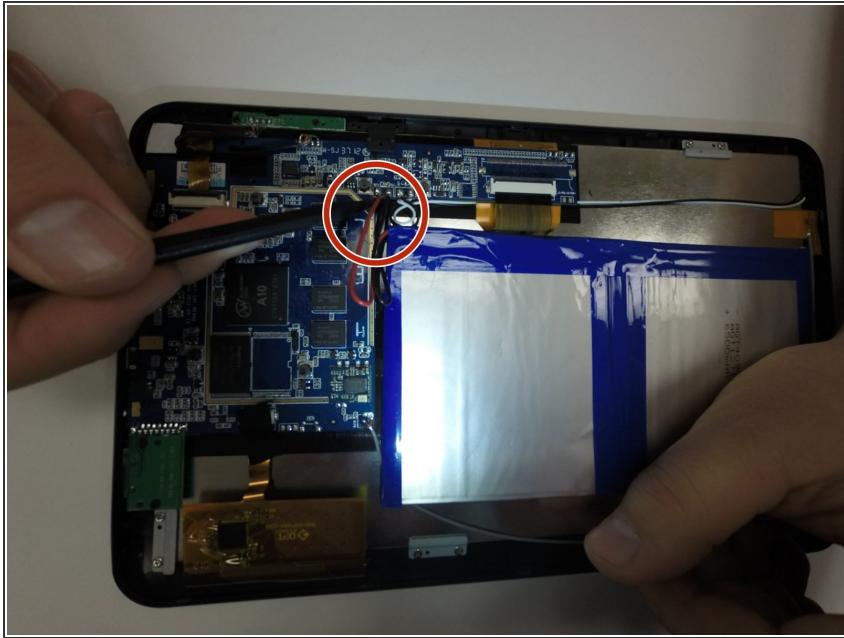


- Disconnect the wires that connect the battery to the motherboard using the spudger.

Step 4



- Slide the spudger underneath the battery and gently lift it off of the adhesive.

Step 5

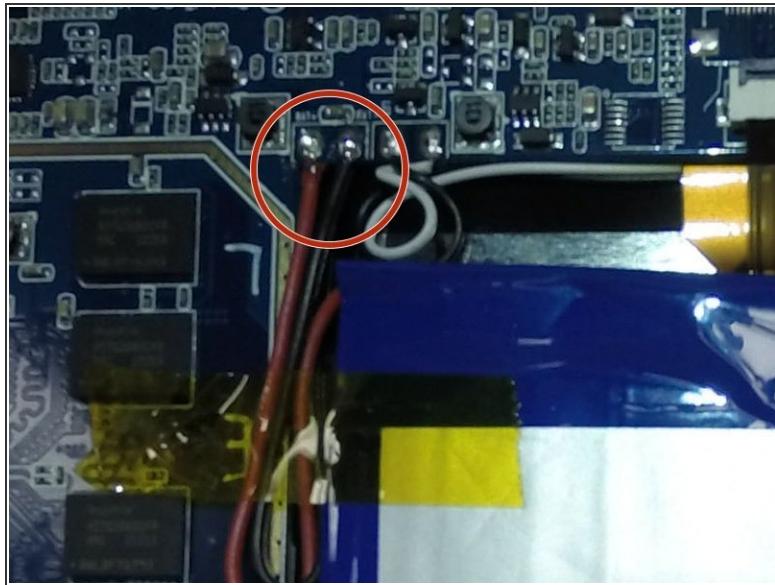

- Place the new battery in the same location and connect the wires the same way as the previous battery.

To reassemble your device, follow these instructions in reverse order.