



Hoover Power Path Pro Advanced Hose Replacement

This guide will show how to replace the hose on your Hoover Power Path Pro Advanced.

Written By: Jose Andres Gonzalez Valdes



INTRODUCTION


The hose creates a pathway for water to flow from the dirty and clean water tanks on your Hoover Power Path Pro Advanced. However, if there is a puncture in the hose, then it needs to be replaced.

TOOLS:

- [Phillips #2 Screwdriver](#) (1)
-



Step 1 — Brush Roller



 Unplug the vacuum cleaner from the wall outlet before starting. Make sure the water tanks are empty.


- Lay the cleaner down horizontally with its wheels closest to the floor.

Step 2

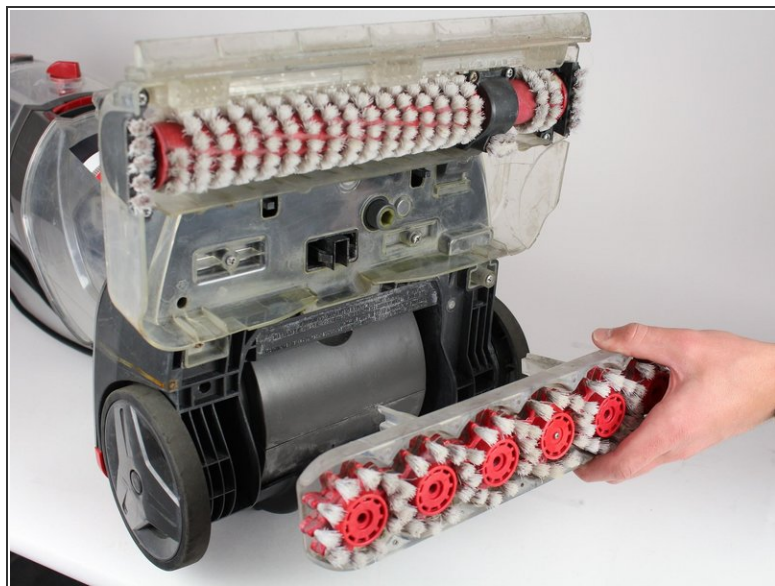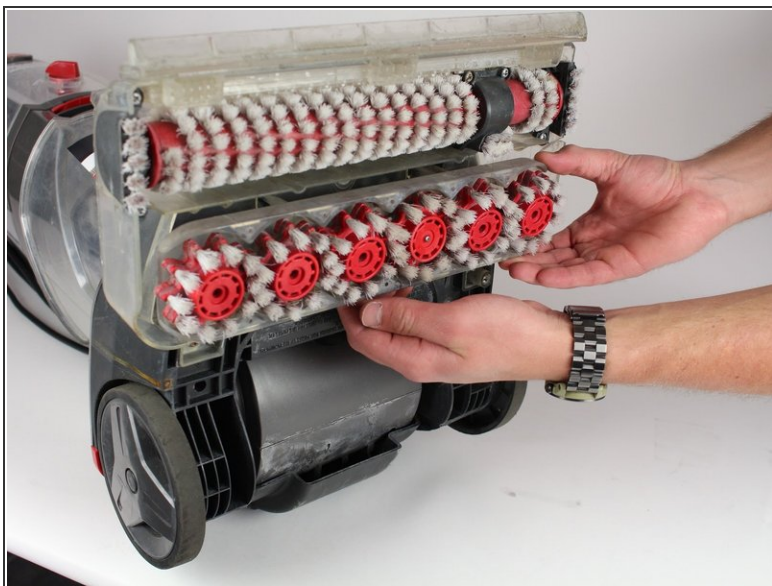


- Hold the lower brush roll with both hands and pull outwards until it is detached.

Step 3

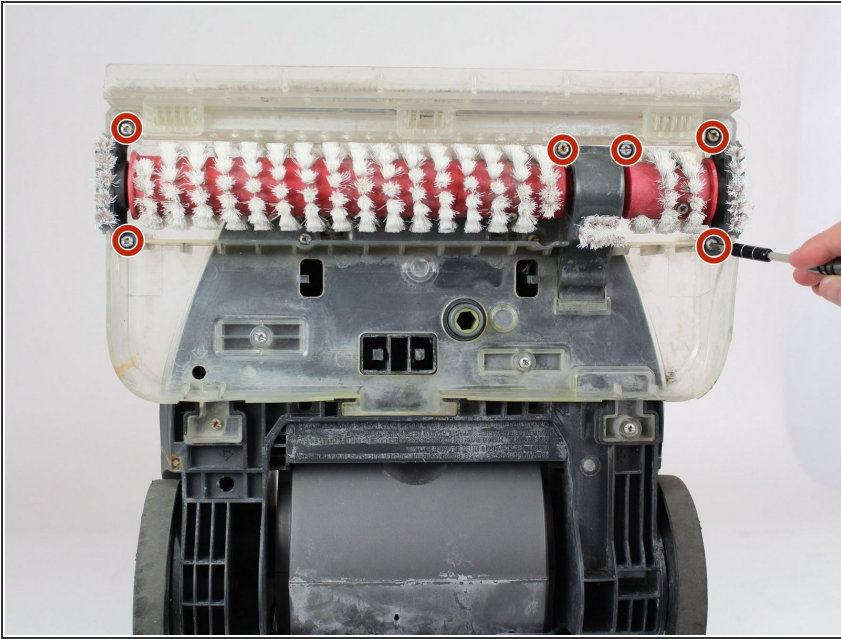

- Unscrew the 6 marked screws using a Phillips #2 head screwdriver.
- Remove the brush roller.

Step 4 — Hose

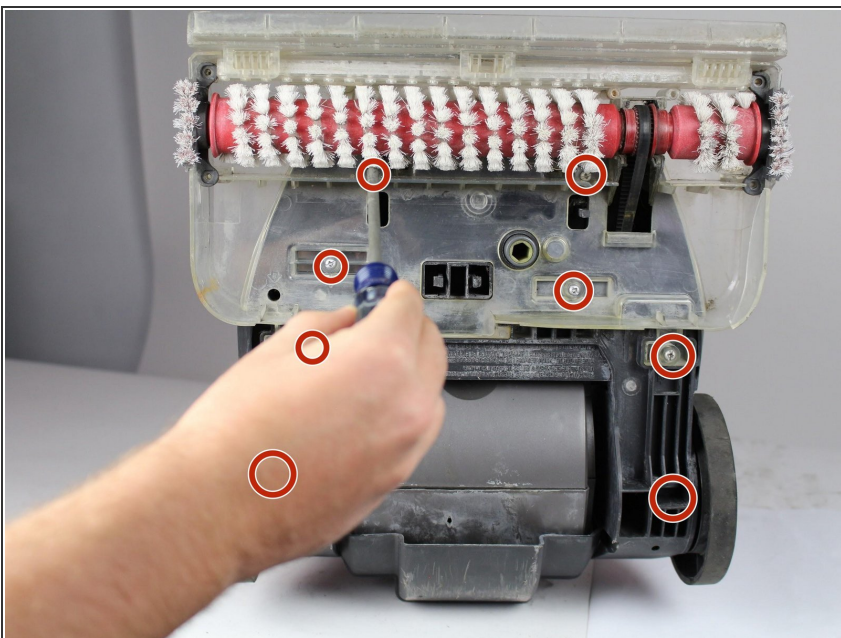

- Use a long #2 Philips head screwdriver to remove the 8 numbered screws on the bottom of the cleaner.
- ⓘ They will also be indicated on the bottom of the vacuum.

Step 5



- Pull the red handle shown to remove the front suction unit from the cleaner.

Step 6



- Unscrew the Phillips #2 screw at the bottom of the hose.

Step 7



- Grab the attachment at tip of the hose and unscrew it. Pull outwards on the hose until completely removed.

To reassemble your device, follow these instructions in reverse order.