



Hoover Power Scrub FH50150 Brush Replacement

Brushes that clean using the solution/water. These brushes may need to be cleaned after usage and need to be detached in order to clean.

Written By: Logan Brown



This document was generated on 2019-11-07 04:11:22 PM (MST).

INTRODUCTION

Brushes that clean using the solution/water. These brushes may need to be cleaned after usage and need to be detached in order to clean.

TOOLS:

- Phillips #1 Screwdriver (1)

Step 1 — Handle Replacement



- Push the button on the top of the clean water/solutions tank and pull on the handle below the button simultaneously. The tank should easily swing out.

Step 2



- Using the screwdriver, unscrew both of the screws on the backside of the handle.

Step 3



- Pull the handle upwards. It should freely slide away from the base of the machine.

Step 4 — Water Tank





- Unlatch the grey switch labeled "Tank Release".

Step 5



- Gently pull on the water tank until it releases from the base.

Step 6 — Brush

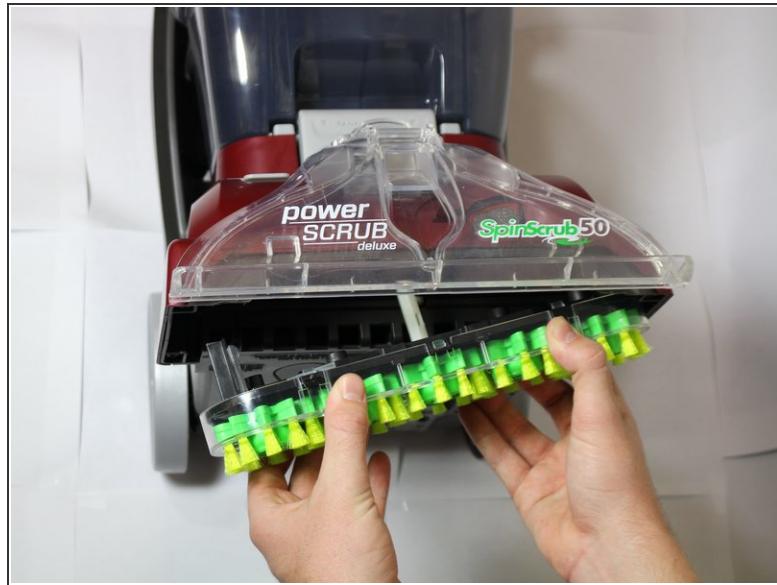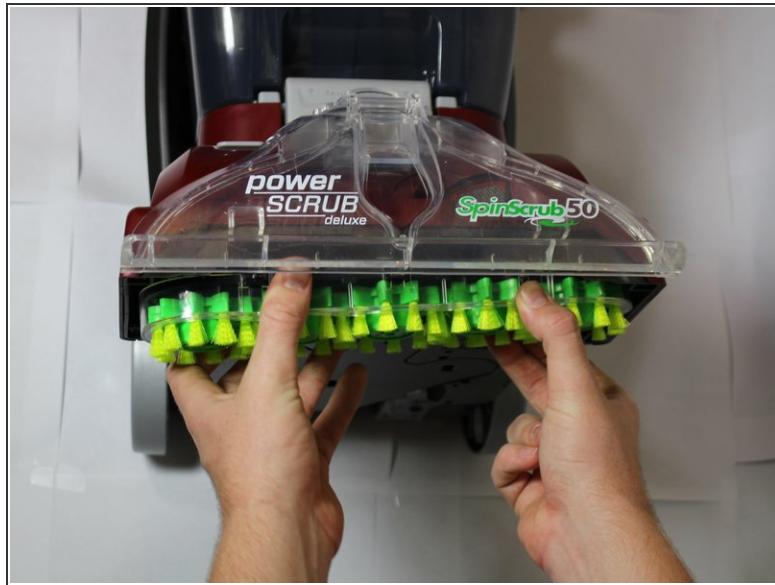

- With the vacuum laying on its back pull gently on the brush part and wiggle until it pulls out of place. Now the brushes are ready for cleaning.

To reassemble your device, follow these instructions in reverse order.

This document was generated on 2019-11-07 04:11:22 PM (MST).

