




Hover-1 Chrome LED Headlights Replacement

Replace the LED headlights when forward lighting on your Hover-1 becomes insufficient or dies.

Written By: Nick McGuire

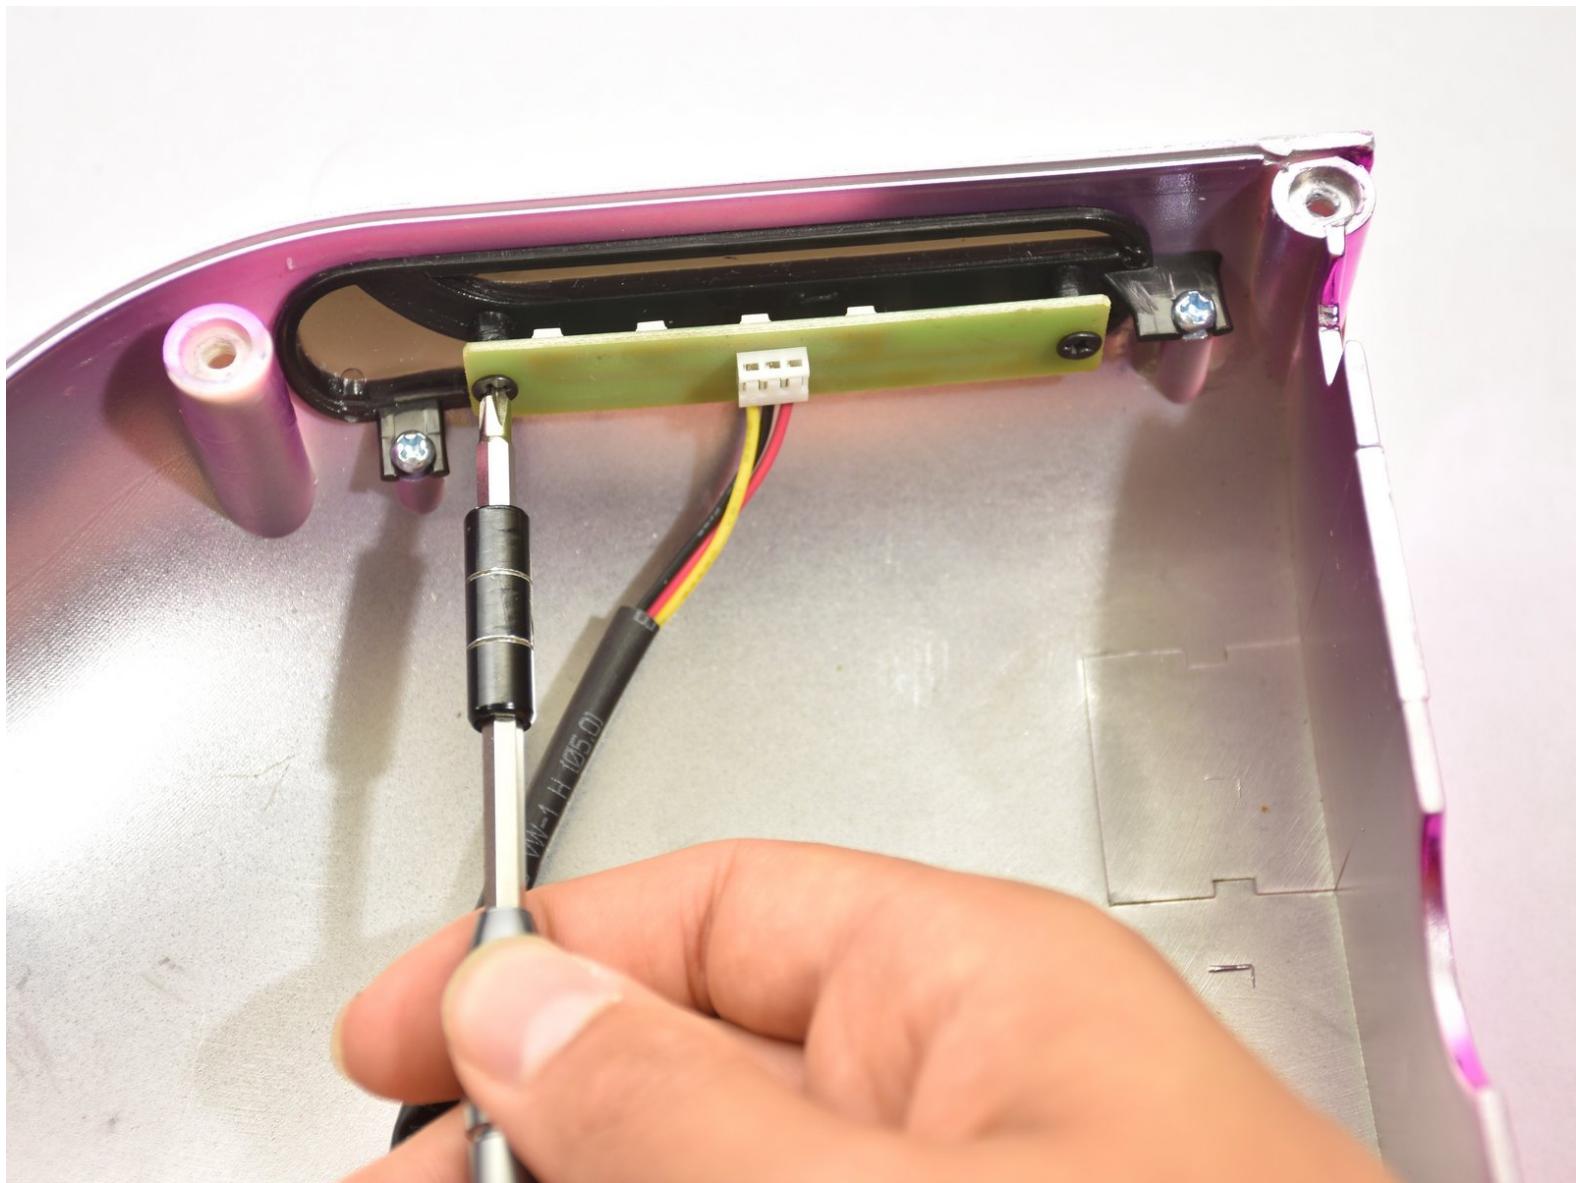

INTRODUCTION

This guide will show you how to replace the LED headlights on the front of the Hover-1 Chrome. You will need a Phillips #2 screwdriver.

TOOLS:


- [Phillips #2 Screwdriver \(1\)](#)

Step 1 — Hover-1 Chrome Disassembly





- Flip the Hover-1 Chrome upside down.
- Use a Phillips #2 screwdriver to remove the fourteen 14 mm screws from the bottom of the Hover-1.
- Break the two black tape circles, and remove the two 15 mm Phillips screws underneath.

Step 2

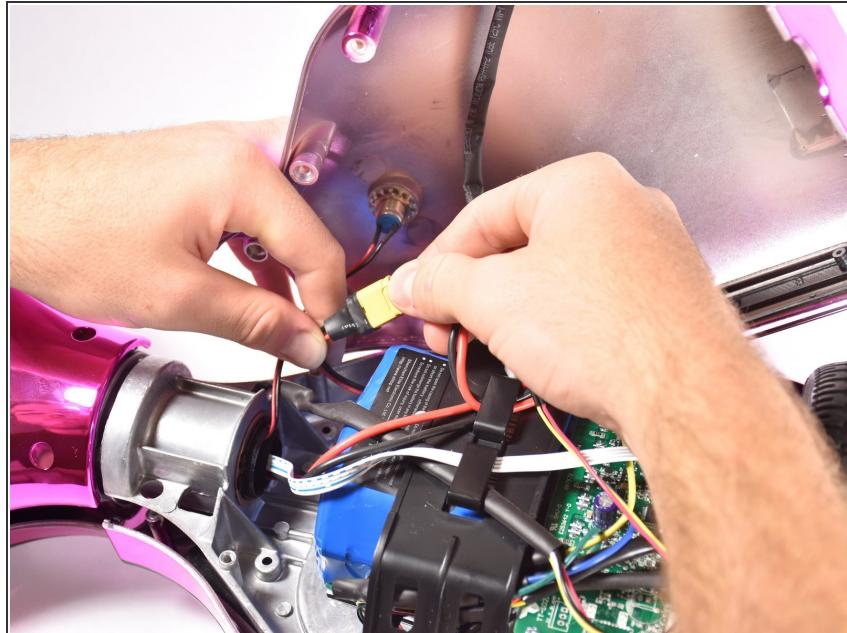


- Lift the shell without the speaker grille and unplug the battery.

Step 3

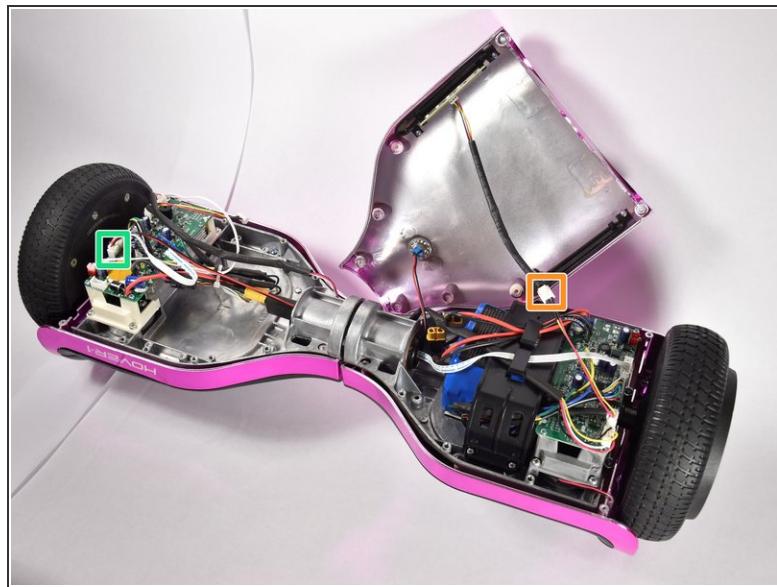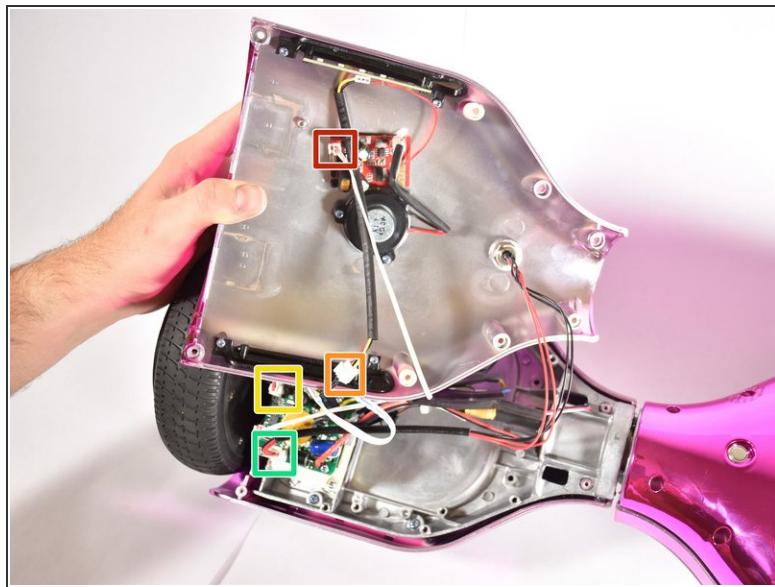

- Lift the shell with the speaker grille.
- Unplug the speaker.
- Unplug the LEDs.
- Unplug the power button
- Unplug the charging port.

Step 4 — LED Headlights

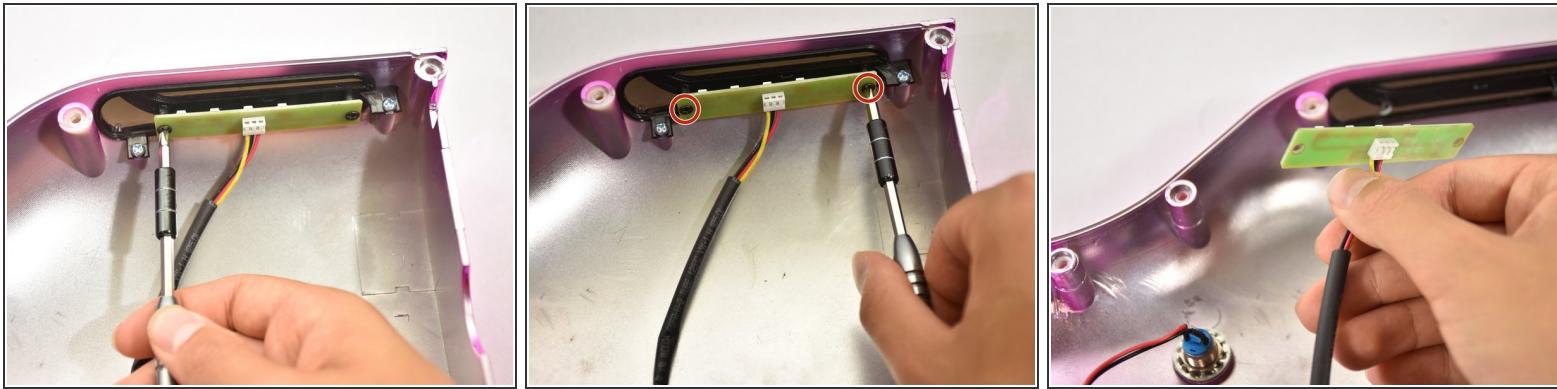

- Use a Phillips #2 screwdriver to remove the two 2 mm screws on either side of the LEDs.
- Remove the LED board.


(i) The LEDs are not symmetrical. This step is for the right side of the board, next to the power button. The left side is covered next.

Step 5



- Locate the LED headlights on the left side of the board.
- Pull the red wire attached to the LEDs perpendicular to the other wires to disconnect it.

Step 6

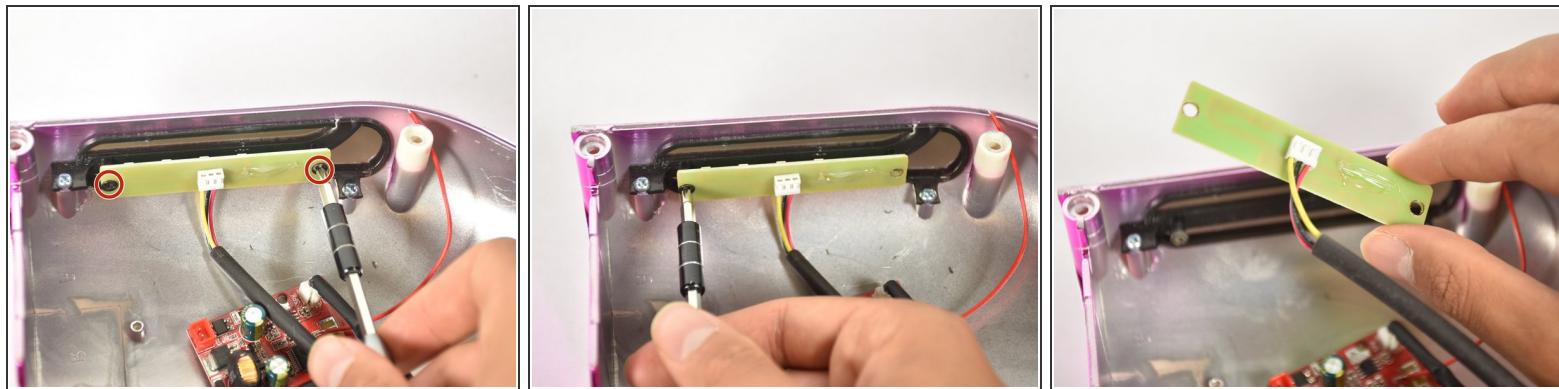

- Use a Phillips #2 screwdriver to remove the two 2 mm screws on either side of the LEDs.
- Remove the LED board.

To reassemble your device, follow these instructions in reverse order.