



Hover-1 Folding E-Scooter Brake Switch Replacement

How to replace the Hover-1 Folding E-Scooter brake switch.

Written By: Brittani Kealoha



INTRODUCTION

This guide is designed to help you replace a broken or damaged brake switch. All you will need is a #0 and #2 Phillips screwdriver to remove the screws in this guide

TOOLS:

- [Phillips #0 Screwdriver](#) (1)
- [Phillips #2 Screwdriver](#) (1)

Step 1 — Brake Switch



- Twist the handle with the red level counterclockwise to remove it from the scooter's main body.

 You will need to twist the handle clockwise reattach it to the scooter's main body.

Step 2




- Remove the four 5 mm screws twisting counterclockwise with a Phillips #0 screwdriver.

 These screws are small and easy to lose.

 When inserting for reassembly the screws twist clockwise to secure.

Step 3

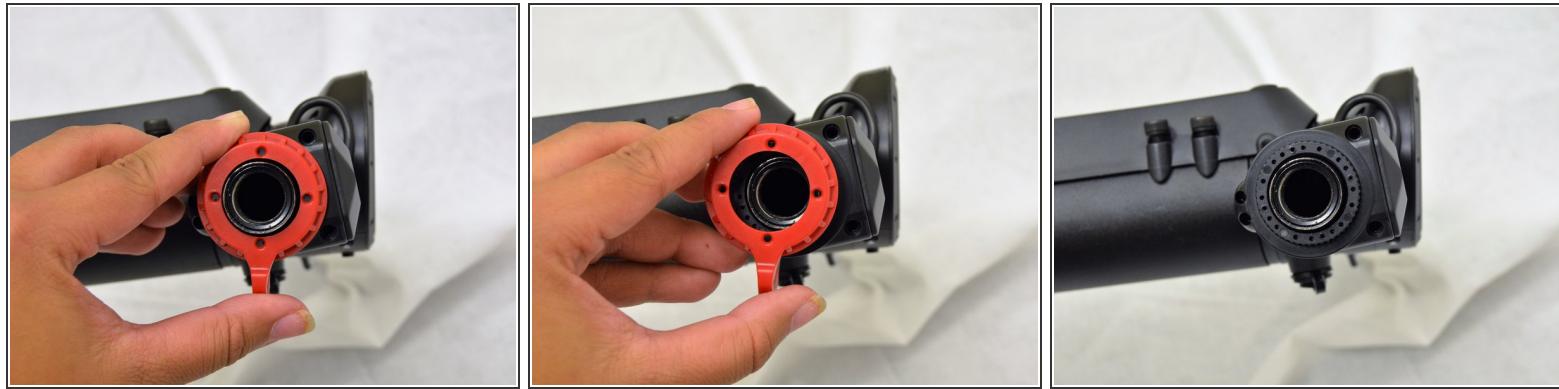

- Remove the red brake switch by sliding it off the main body.
- ☒ When putting the brake switch back make sure to align the tab with the throttle switch.

To reassemble your device, follow these instructions in reverse order.