




# Hover-1 H1 LED Headlight Replacement

How to replace the LED headlights on the Hover-1 H1 hoverboard.

Written By: Sara Passantino

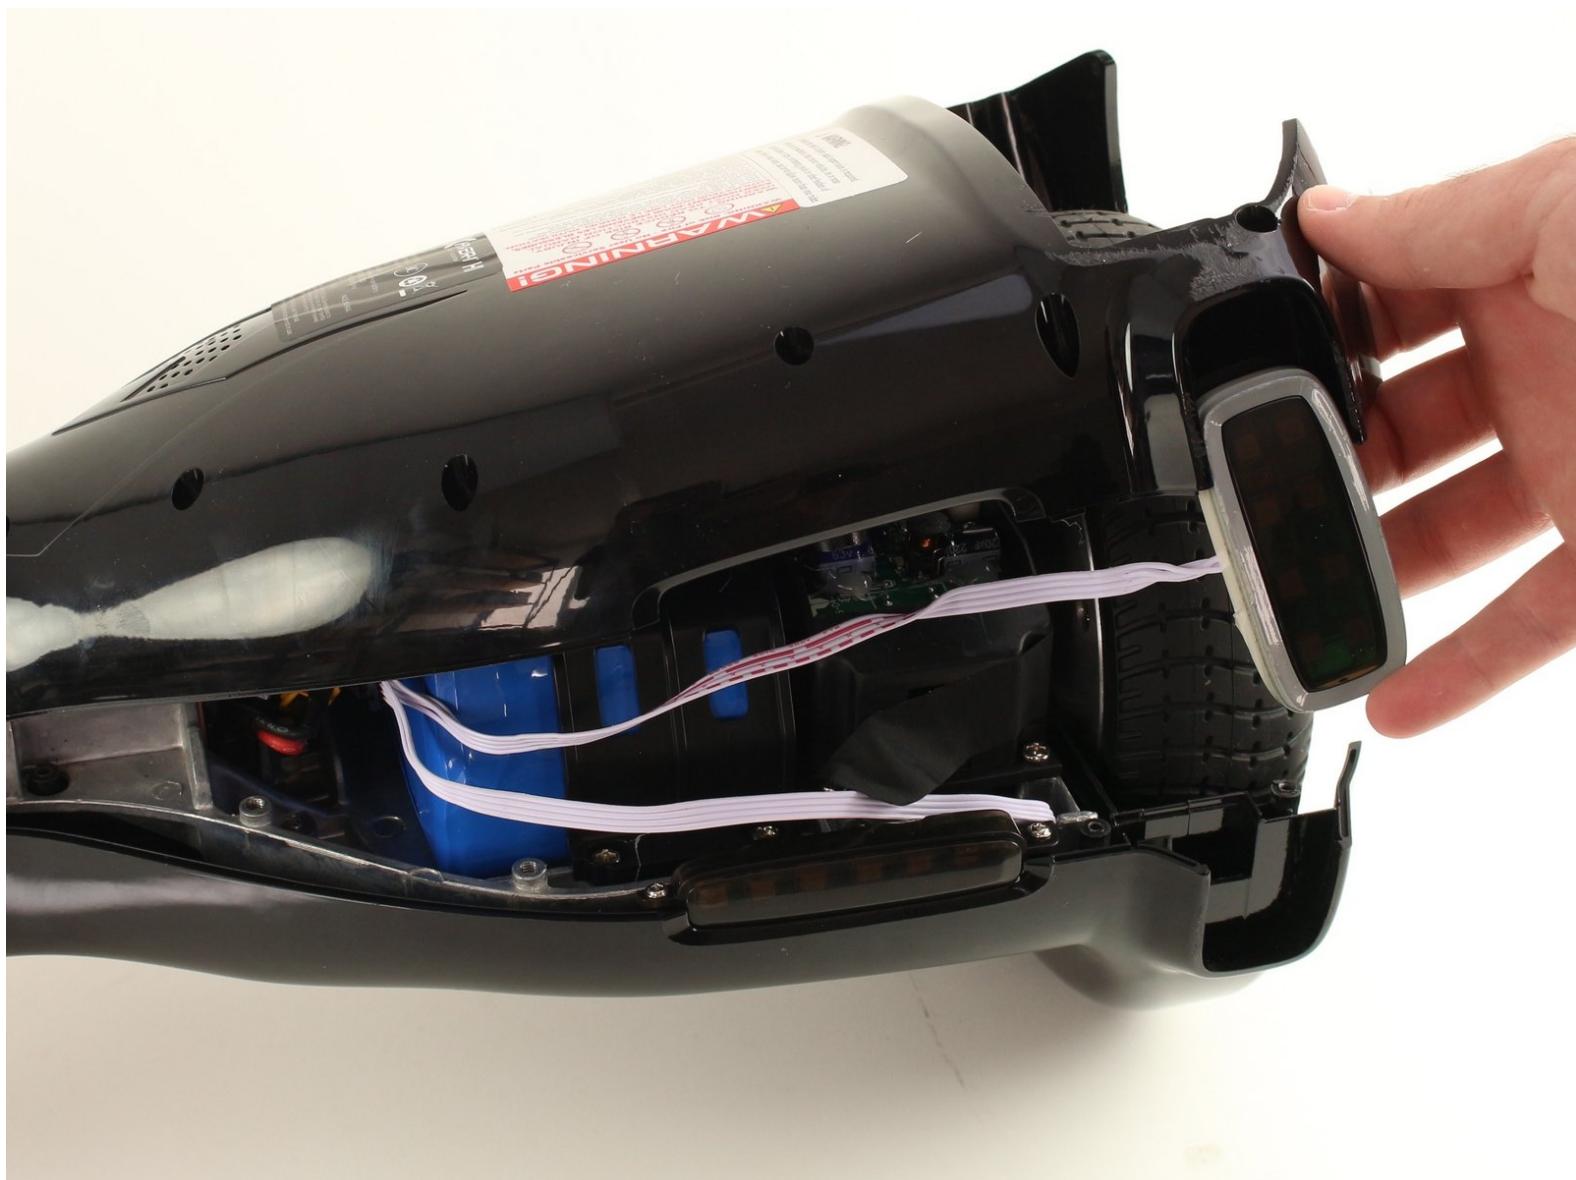


## INTRODUCTION

This guide explains how to replace the LED headlights on your Hover-1 H1 hoverboard.

### TOOLS:


- Phillips #2 Screwdriver (1)
- Phillips #0 Screwdriver (1)

## Step 1 — Bottom Shell

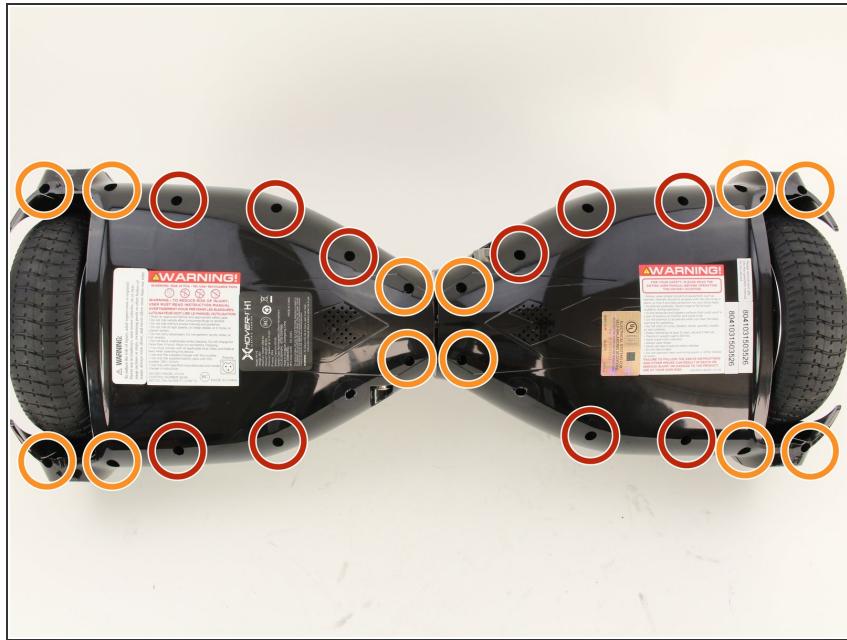

- Remove the ten 9mm machine screws by using a long Phillips #2 screwdriver to rotate the screws counterclockwise.
- Remove the twelve 9mm sheet metal screws by using a long Phillips #2 screwdriver to rotate the screws counterclockwise.

## Step 2

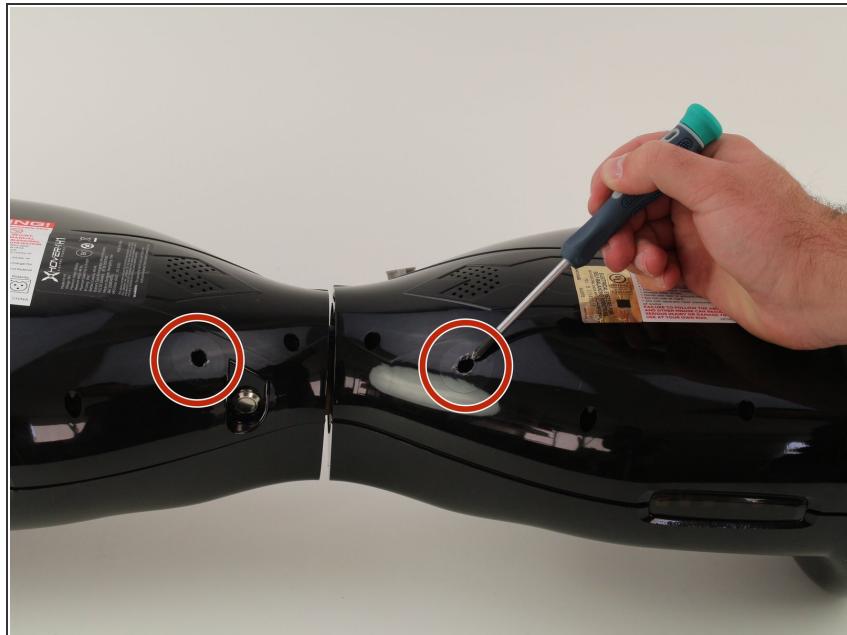

- Puncture the two black stickers by using the tip of a screwdriver.
- Remove the two 9mm machine screws by using a long Phillips #2 screwdriver to rotate the screws counterclockwise.


## Step 3



- Lift each side of the bottom shell by pulling up.


**⚠** When lifting the shell, take care to not tear any cables from their connectors.

## Step 4

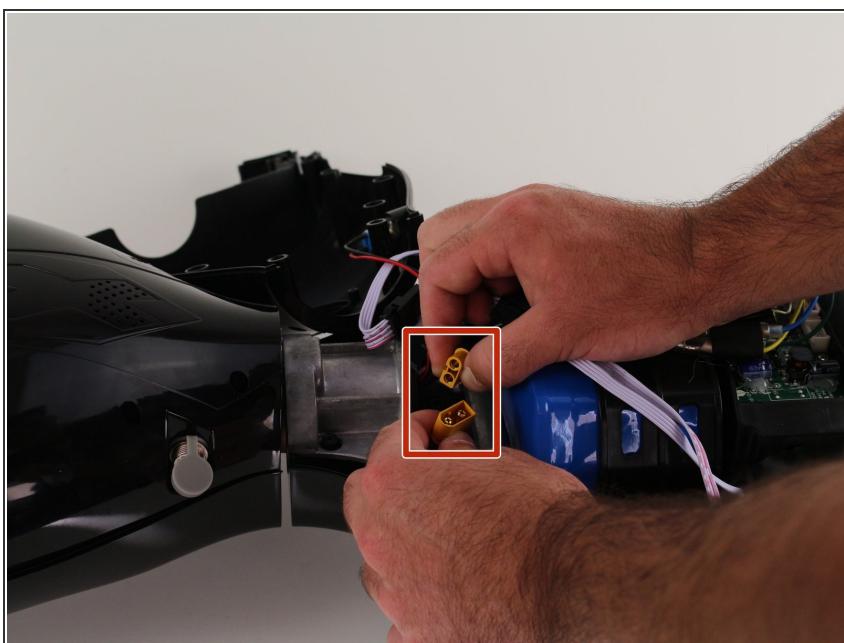


- Unplug the battery by pulling gently on both sides of the orange connector.

## Step 5 — LED Headlights

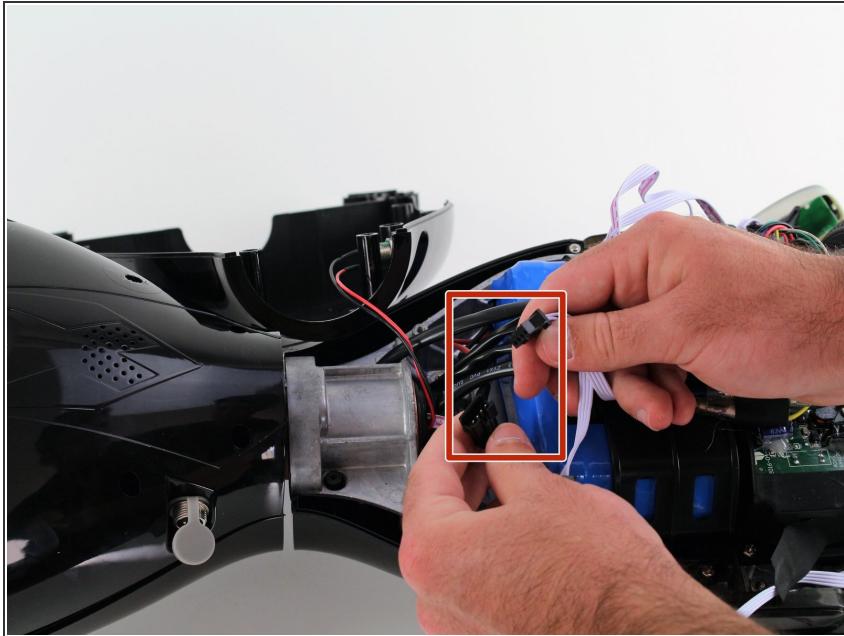


- Unplug the lights from the battery by pulling gently on both sides of the black connector attached to the white wires.

## Step 6

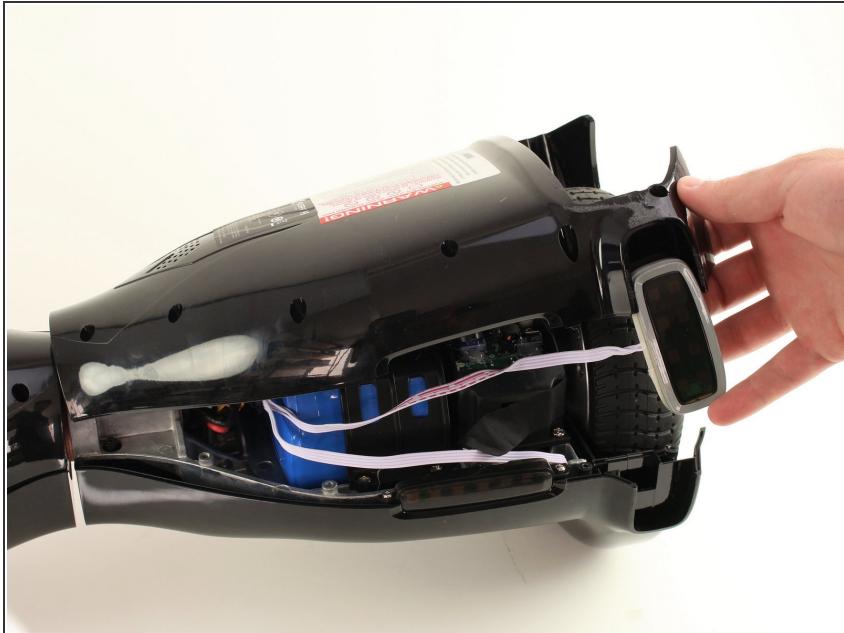

- Remove the vertical light from the shell by using your hands to pull it free from the surrounding shell.

## Step 7

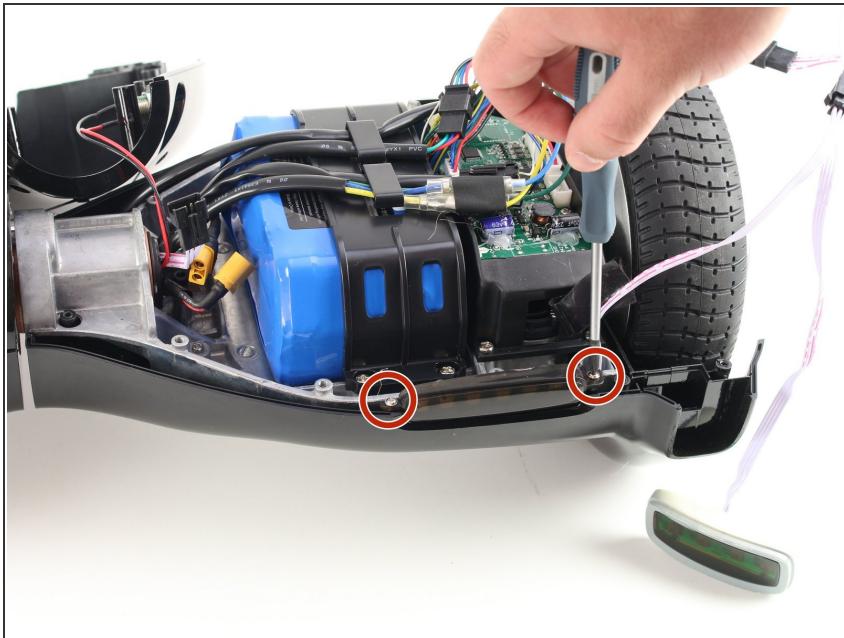

- Remove two 8mm screws using a Phillips #0 screwdriver to rotate the screws counterclockwise.
- Remove the horizontal light by using your fingers to pull the light up out of the shell.

To reassemble your device, follow these instructions in reverse order.